



Model	
product brandname	SENTRON
Product designation	accessories
Connections according IEC	
Connectable conductor cross-section	
• for copper cable / finely stranded / minimum	50 mm ²
• for copper cable / finely stranded / maximum	240 mm ²
• for copper cable / finely stranded / with core end processing / minimum	50 mm ²
• for copper cable / finely stranded / with core end processing / maximum	240 mm ²
• for copper cable / stranded / minimum	50 mm ²
• for copper cable / stranded / maximum	300 mm ²
• for aluminum cable / stranded / minimum	50 mm ²
• for aluminum cable / stranded / maximum	300 mm ²
Wire stripping length	28 mm
Tightening torque	
• at usage of copper-cables / multi-stranded	42

- at usage of copper-cables / finely stranded

42

Connections according UL

Wire stripping length	1.1 in
Connectable conductor cross-section	
• for copper-cable / multi-stranded / minimum	1 AWG
• for copper-cable / multi-stranded / maximum	600 kcmil
• for copper-cable / finely stranded / minimum	1 AWG
• for copper-cable / finely stranded / maximum	600 kcmil
• for copper-cable / finely stranded / with insulated conductor end processing / minimum	50
• for copper-cable / finely stranded / with insulated conductor end processing / maximum	240
• for aluminum-cable / multi-stranded / minimum	1 AWG
• for aluminum-cable / multi-stranded / maximum	600 kcmil
Tightening torque / at usage of copper-cables	
• multi-stranded	370 lb-in
• finely stranded	370 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
		 EG-Konf.	Typprüfbescheinigung/Werkszeugnis	Sonstige

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9383-0JB13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9383-0JB13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9383-0JB13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

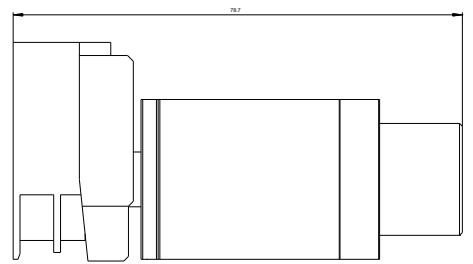

last modified:

06/05/2017