

WIRE CONNECTOR WITH CONTROL WIRE TAP 3 PCS.  
ACCESSORY FOR: 3VA2 400/630



Model	
product brandname	SETRON
Product designation	accessories

Connections according IEC	
Connectable conductor cross-section	
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / minimum</li> </ul>	50 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / maximum</li> </ul>	240 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / with core end processing / minimum</li> </ul>	50 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / finely stranded / with core end processing / maximum</li> </ul>	240 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / stranded / minimum</li> </ul>	50 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for copper cable / stranded / maximum</li> </ul>	300 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for aluminum cable / stranded / minimum</li> </ul>	50 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>• for aluminum cable / stranded / maximum</li> </ul>	300 mm <sup>2</sup>
Wire stripping length	28 mm
Tightening torque	
<ul style="list-style-type: none"> <li>• at usage of copper-cables / multi-stranded</li> </ul>	42

- at usage of copper-cables / finely stranded

42

## Connections according UL

Wire stripping length	1.1 in
Connectable conductor cross-section	
<ul style="list-style-type: none"> <li>• for copper-cable / multi-stranded / minimum</li> </ul>	1 AWG
<ul style="list-style-type: none"> <li>• for copper-cable / multi-stranded / maximum</li> </ul>	600 kcmil
<ul style="list-style-type: none"> <li>• for copper-cable / finely stranded / minimum</li> </ul>	1 AWG
<ul style="list-style-type: none"> <li>• for copper-cable / finely stranded / maximum</li> </ul>	600 kcmil
<ul style="list-style-type: none"> <li>• for copper-cable / finely stranded / with insulated conductor end processing / minimum</li> </ul>	50
<ul style="list-style-type: none"> <li>• for copper-cable / finely stranded / with insulated conductor end processing / maximum</li> </ul>	240
<ul style="list-style-type: none"> <li>• for aluminum-cable / multi-stranded / minimum</li> </ul>	1 AWG
<ul style="list-style-type: none"> <li>• for aluminum-cable / multi-stranded / maximum</li> </ul>	600 kcmil
Tightening torque / at usage of copper-cables	
<ul style="list-style-type: none"> <li>• multi-stranded</li> </ul>	370 lb-in
<ul style="list-style-type: none"> <li>• finely stranded</li> </ul>	370 lb-in

## Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
--------------------------	-----	---------------------------	-------------------	-------



EG-Konf.

[Typrüfbescheinigung/Werkszeugnis](#)

[Sonstige](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9383-0JG13>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9383-0JG13>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9383-0JG13](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9383-0JG13)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://www.siemens.com/specifications>

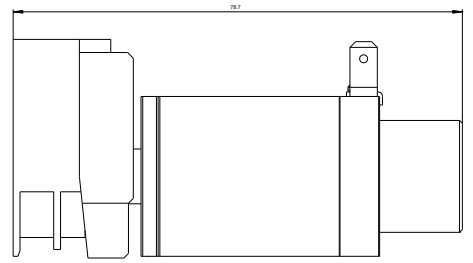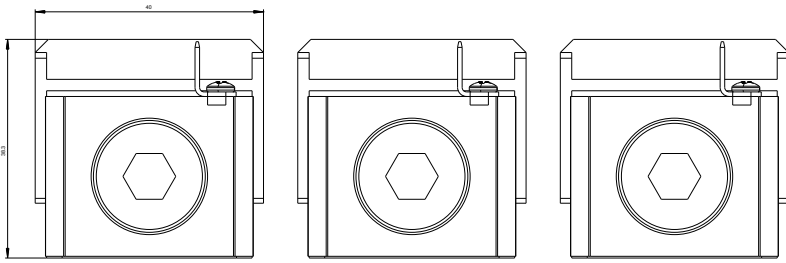

**last modified:**

06/05/2017