

WIRE CONNECTOR 2 CABLES WITH CONTROL WIRE TAP 4
PCS. ACCESSORY FOR: 3VA1 250



Model	
product brandname	SETRON
Product designation	accessories
Design of the product	circular conductor terminal

Connections according IEC	
Connectable conductor cross-section	
• for copper cable / finely stranded / minimum	25 mm²
• for copper cable / finely stranded / maximum	150 mm²
• for copper cable / finely stranded / with core end processing / minimum	25 mm²
• for copper cable / finely stranded / with core end processing / maximum	70 mm²
• for copper cable / stranded / minimum	25 mm²
• for copper cable / stranded / maximum	150 mm²
• for aluminum cable / stranded / minimum	25 mm²
• for aluminum cable / stranded / maximum	150 mm²
Wire stripping length	25 / 50 mm
Tightening torque	

- at usage of copper-cables / multi-stranded
- at usage of copper-cables / finely stranded

31
31

Connections according UL

Wire stripping length	1.0 / 2.0 in
Connectable conductor cross-section	
• for copper-cable / multi-stranded / minimum	4 AWG
• for copper-cable / multi-stranded / maximum	300 kcmil
• for copper-cable / finely stranded / minimum	4 AWG
• for copper-cable / finely stranded / maximum	300 kcmil
• for copper-cable / finely stranded / with insulated conductor end processing / minimum	25
• for copper-cable / finely stranded / with insulated conductor end processing / maximum	70
• for aluminum-cable / multi-stranded / minimum	4 AWG
• for aluminum-cable / multi-stranded / maximum	300 kcmil
Tightening torque / at usage of copper-cables	
• multi-stranded	275 lb-in
• finely stranded	275 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
			Typprüfbescheinigung/Werkszeugnis	Sonstige
	RCM	EG-Konf.		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9214-0JC22>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9214-0JC22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9214-0JC22

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

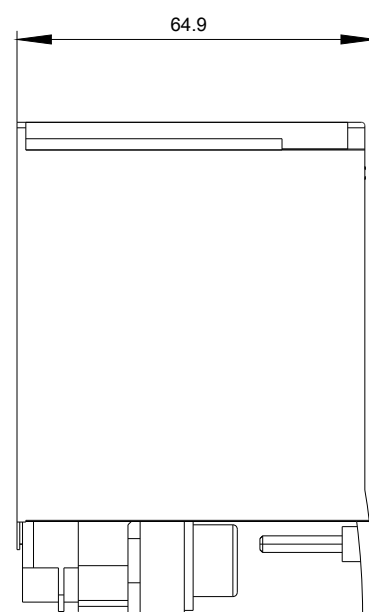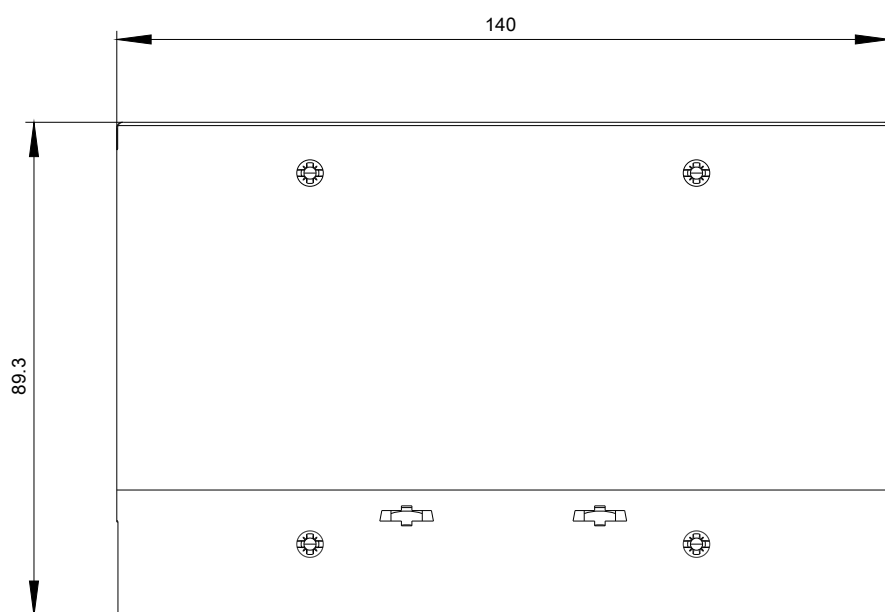

last modified:

06/05/2017