

WIRE CONNECTOR LARGE 3 PCS. ACCESSORY FOR: 3VA2
100/160/250 ACCESSORY FOR: 3VA2/3 160/250



Model	
product brandname	SENTRON
Product designation	accessories
Design of the product	circular conductor terminal

Connections according IEC	
Connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper cable / finely stranded / minimum 	50 mm ²
<ul style="list-style-type: none"> • for copper cable / finely stranded / maximum 	185 mm ²
<ul style="list-style-type: none"> • for copper cable / finely stranded / with core end processing / minimum 	50 mm ²
<ul style="list-style-type: none"> • for copper cable / finely stranded / with core end processing / maximum 	185 mm ²
<ul style="list-style-type: none"> • for copper cable / stranded / minimum 	50 mm ²
<ul style="list-style-type: none"> • for copper cable / stranded / maximum 	240 mm ²
<ul style="list-style-type: none"> • for aluminum cable / stranded / minimum 	25 mm ²
<ul style="list-style-type: none"> • for aluminum cable / stranded / maximum 	240 mm ²
Wire stripping length	30,5 mm
Tightening torque	

- at usage of copper-cables / multi-stranded
- at usage of copper-cables / finely stranded

31 Nm

31 Nm

Connections according UL

Wire stripping length	1.2 in
Connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper-cable / multi-stranded / minimum 	2 AWG
<ul style="list-style-type: none"> • for copper-cable / multi-stranded / maximum 	350 kcmil
<ul style="list-style-type: none"> • for copper-cable / finely stranded / minimum 	2 AWG
<ul style="list-style-type: none"> • for copper-cable / finely stranded / maximum 	350 kcmil
<ul style="list-style-type: none"> • for copper-cable / finely stranded / with insulated conductor end processing / minimum 	50
<ul style="list-style-type: none"> • for copper-cable / finely stranded / with insulated conductor end processing / maximum 	185
<ul style="list-style-type: none"> • for aluminum-cable / multi-stranded / minimum 	2 AWG
<ul style="list-style-type: none"> • for aluminum-cable / multi-stranded / maximum 	350 kcmil
Tightening torque / at usage of copper-cables	
<ul style="list-style-type: none"> • multi-stranded 	275 lb-in
<ul style="list-style-type: none"> • finely stranded 	275 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	other
--------------------------	-----	---------------------------	-------



[Sonstige](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9223-0JJ13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9223-0JJ13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9223-0JJ13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

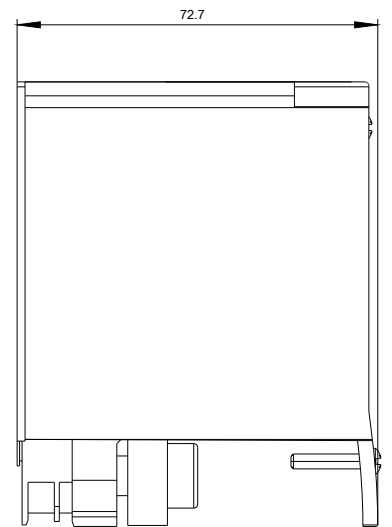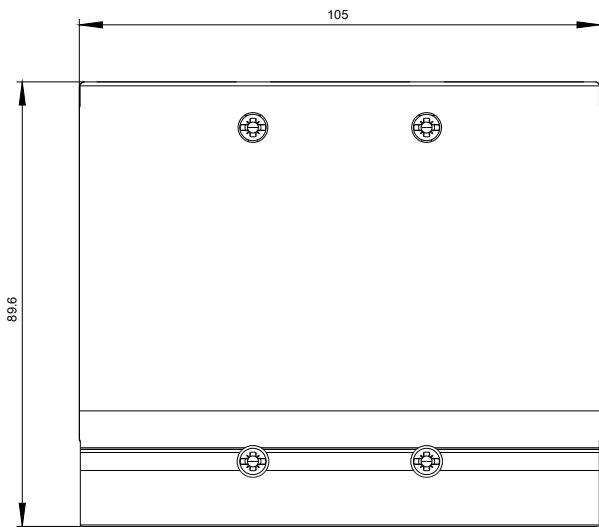

last modified:

06/05/2017