

WIRE CONNECTOR WITH CONTROL WIRE TAP 4 PCS.
ACCESSORY FOR: 3VA2 400/630



Model	
product brandname	SETRON
Product designation	accessories
Connections according IEC	
Connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper cable / finely stranded / minimum 	50 mm ²
<ul style="list-style-type: none"> • for copper cable / finely stranded / maximum 	240 mm ²
<ul style="list-style-type: none"> • for copper cable / finely stranded / with core end processing / minimum 	50 mm ²
<ul style="list-style-type: none"> • for copper cable / finely stranded / with core end processing / maximum 	240 mm ²
<ul style="list-style-type: none"> • for copper cable / stranded / minimum 	50 mm ²
<ul style="list-style-type: none"> • for copper cable / stranded / maximum 	300 mm ²
<ul style="list-style-type: none"> • for aluminum cable / stranded / minimum 	50 mm ²
<ul style="list-style-type: none"> • for aluminum cable / stranded / maximum 	300 mm ²
Wire stripping length	28 mm
Tightening torque	
<ul style="list-style-type: none"> • at usage of copper-cables / multi-stranded 	42




- at usage of copper-cables / finely stranded

42

Connections according UL

Wire stripping length	1.1 in
Connectable conductor cross-section	
<ul style="list-style-type: none"> • for copper-cable / multi-stranded / minimum 	1 AWG
<ul style="list-style-type: none"> • for copper-cable / multi-stranded / maximum 	600 kcmil
<ul style="list-style-type: none"> • for copper-cable / finely stranded / minimum 	1 AWG
<ul style="list-style-type: none"> • for copper-cable / finely stranded / maximum 	600 kcmil
<ul style="list-style-type: none"> • for copper-cable / finely stranded / with insulated conductor end processing / minimum 	50
<ul style="list-style-type: none"> • for copper-cable / finely stranded / with insulated conductor end processing / maximum 	240
<ul style="list-style-type: none"> • for aluminum-cable / multi-stranded / minimum 	1 AWG
<ul style="list-style-type: none"> • for aluminum-cable / multi-stranded / maximum 	600 kcmil
Tightening torque / at usage of copper-cables	
<ul style="list-style-type: none"> • multi-stranded 	370 lb-in
<ul style="list-style-type: none"> • finely stranded 	370 lb-in

Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	other
		 EG-Konf.	Typrüfbescheinigung/Werkszeugnis	Sonstige

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9384-0JG13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9384-0JG13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9384-0JG13

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

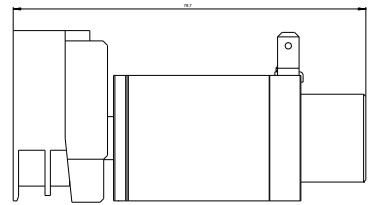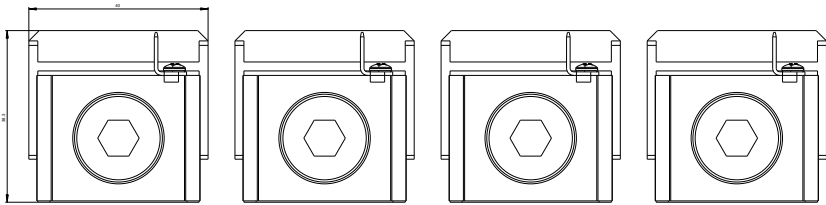

last modified:

06/05/2017