



CIRCUIT BREAKER 3VA2 IEC FRAME 400 BREAKING CAPACITY CLASS M ICU=55KA @ 415 V 3-POLE, LINE PROTECTION ETU560, LSIG, IN=250A OVERLOAD PROTECTION IR=100A ...250A SHORT CIRCUIT PROTECTION ISD=0,6..10X IN, II=1,5..12X IN NEUTRAL PROTECTION OPTIONAL WITH EXT. CT;UPTO 160% GROUND-FAULT, SWITCHABLE IG=0,2... 1 X IN, TG=0,05-0,8S BUSBAR CONNECTION

| Model                                          |                             |
|------------------------------------------------|-----------------------------|
| product brandname                              | SENTRON                     |
| Product designation                            | Molded case circuit breaker |
| Design of the product                          | Line protection             |
| Design of the overcurrent release              | ETU560                      |
| Protective function of the overcurrent release | LSIG                        |
| Number of poles                                | 3                           |

| General technical data                                                                           |                                         |
|--------------------------------------------------------------------------------------------------|-----------------------------------------|
| Tension assignée d'isolement Ui                                                                  | 800 V                                   |
| Max. rated operational voltage Ue with AC 50/60Hz                                                | 690 V                                   |
| Active power loss / for rated value of the current / at AC / in hot operating state / per device | 37.5 W                                  |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole   | 12.5 W                                  |
| Mechanical service life (switching cycles) / typical                                             | 20 000                                  |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz                        | 6 000                                   |
| Neutral conductors / upgradeable/retrofitable                                                    | Yes                                     |
| Ground fault monitoring version                                                                  | Summation current formation L-conductor |

|                              |        |
|------------------------------|--------|
| Product function             |        |
| • communication function     | Yes    |
| • other measurement function | No     |
| Net weight                   | 4.3 kg |

### Electricity

|                                                                   |       |
|-------------------------------------------------------------------|-------|
| Max. rated operational voltage of the size of the circuit-breaker | 400 A |
| Courant permanent assigné Iu                                      | 250 A |
| Operating current                                                 |       |
| • at 40 °C                                                        | 250 A |
| • at 45 °C                                                        | 250 A |
| • at 50 °C                                                        | 250 A |
| • at 55 °C                                                        | 250 A |
| • at 60 °C                                                        | 250 A |
| • at 65 °C                                                        | 250 A |
| • at 70 °C                                                        | 250 A |

### Switching capacity according to IEC 60947

|                                                           |        |
|-----------------------------------------------------------|--------|
| Switching capacity class of the circuit breaker           | M      |
| Maximum short-circuit current breaking capacity (Icu)     |        |
| • at 240 V                                                | 85 kA  |
| • at 415 V                                                | 55 kA  |
| • at 440 V                                                | 55 kA  |
| • at 500 V                                                | 36 kA  |
| • at 690 V                                                | 5 kA   |
| Operational short-circuit current breaking capacity (Ics) |        |
| • at 240 V                                                | 85 kA  |
| • at 415 V                                                | 55 kA  |
| • at 440 V                                                | 55 kA  |
| • at 500 V                                                | 36 kA  |
| • at 690 V                                                | 5 kA   |
| Short-circuit current making capacity (Icm)               |        |
| • at 240 V                                                | 187 kA |
| • at 415 V                                                | 121 kA |
| • at 690 V                                                | 7.5 kA |

### Adjustable parameters

|                                                         |       |
|---------------------------------------------------------|-------|
| Adjustable response value current / I <sub>g</sub> min. | 100 A |
| Adjustable response value current / I <sub>g</sub> min. | 250 A |
| Adjustable response value current / I <sub>g</sub> min. | 0.5   |
| Adjustable response value current / I <sub>g</sub> min. | 25    |
| Adjustable response value current / I <sub>g</sub> min. | 150 A |

|                                                                                                 |         |
|-------------------------------------------------------------------------------------------------|---------|
| Adjustable response value current / I <sub>g</sub> min.                                         | 2 500 A |
| Short-term delayed / tripping switchable / I <sub>2t</sub> =ON/OFF                              | Yes     |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.5 s   |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.5 s   |
| Adjustable response value current / I <sub>i</sub> min.                                         | 375 A   |
| Adjustable response value current / I <sub>i</sub> max.                                         | 3 000 A |
| Design of the N-conductor protection                                                            | Without |
| Ground fault protection can be switched ON/OFF                                                  | Yes     |
| Ground fault protection / tripping switchable / I <sub>2t</sub> =ON/OFF                         | Yes     |
| Adjustable response value current / I <sub>g</sub> min.                                         | 50 A    |
| Adjustable response value current / I <sub>g</sub> max.                                         | 250 A   |
| Adjustable response value current / t <sub>g</sub> min.                                         | 0.05 s  |
| Adjustable response value current / I <sub>g</sub> min.                                         | 0.8 s   |
| Adjustable response value current / for G-tripping / with I <sub>2t</sub> characteristic / min. | 0.2 A   |
| Adjustable response value current / for G-tripping / with I <sub>2t</sub> characteristic / max. | 1 A     |

#### Mechanical Design

|             |        |
|-------------|--------|
| Height [in] | 9.8 in |
| Height      | 248 mm |
| Width [in]  | 5.4 in |
| Width       | 138 mm |
| Depth [in]  | 5.4 in |
| Depth       | 137 mm |

#### Connections

|                                                                                         |                |
|-----------------------------------------------------------------------------------------|----------------|
| Arrangement of electrical connectors / for main current circuit                         | Front terminal |
| Type of electrical connection / for main current circuit                                | Lug terminal   |
| Type of connectable conductor cross-section, connection screw, width x thickness , min. | 20 x 1         |
| Type of connectable conductor cross-section, connection screw, width x thickness , max. | 35 x 10        |

#### Auxiliary circuit

|                                                |   |
|------------------------------------------------|---|
| Number of CO contacts / for auxiliary contacts | 0 |
|------------------------------------------------|---|

#### Accessories

|                                            |     |
|--------------------------------------------|-----|
| Product extension / optional / motor drive | Yes |
|--------------------------------------------|-----|

#### Environmental conditions

|                                    |      |
|------------------------------------|------|
| Protection class IP / on the front | IP40 |
|------------------------------------|------|

#### Ambient temperature

- during operation / minimum -25 °C
- during operation / maximum 70 °C
- during storage / minimum -40 °C
- during storage / maximum 80 °C

#### Certificates

Equipment marking / acc. to DIN EN 81346-2

Q

##### General Product Approval

##### EMC

##### Declaration of Conformity

##### Test Certificates



CCC



VDE



RCM



EG-Konf.

[Typprüfbescheinigung/Werkszeugnis](#)

##### Test Certificates

##### Shipping Approval

[Sonstige](#)

[spezielle  
Prüfbescheinigung  
n](#)



ABS



BUREAU  
VERITAS



GL



LRS

##### Shipping Approval

##### other



RMRS

[Sonstige](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2325-5JQ32-0AA0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VA2325-5JQ32-0AA0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2325-5JQ32-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2325-5JQ32-0AA0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

<http://www.siemens.com/specifications>

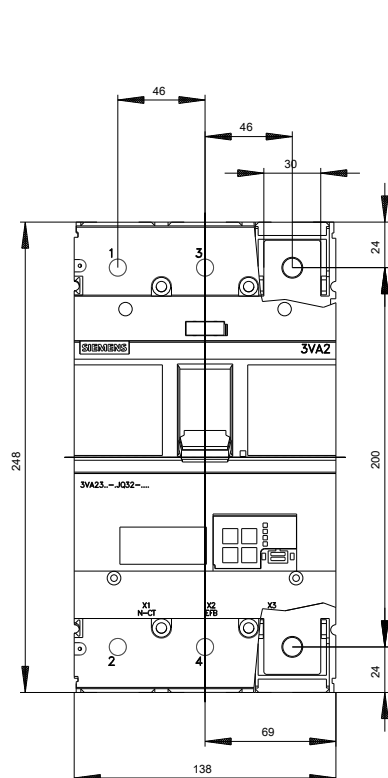



last modified:

05/24/2017