

PM-D F4 F. MOTOR STARTER POWER MODULE,
FAILSAFE EXPANSION TO PM-D F 1/2 FOR
FURTHER ET200S RAIL PLUGABLE ONTO TM-PF30
S47-C0 -C1 30MM

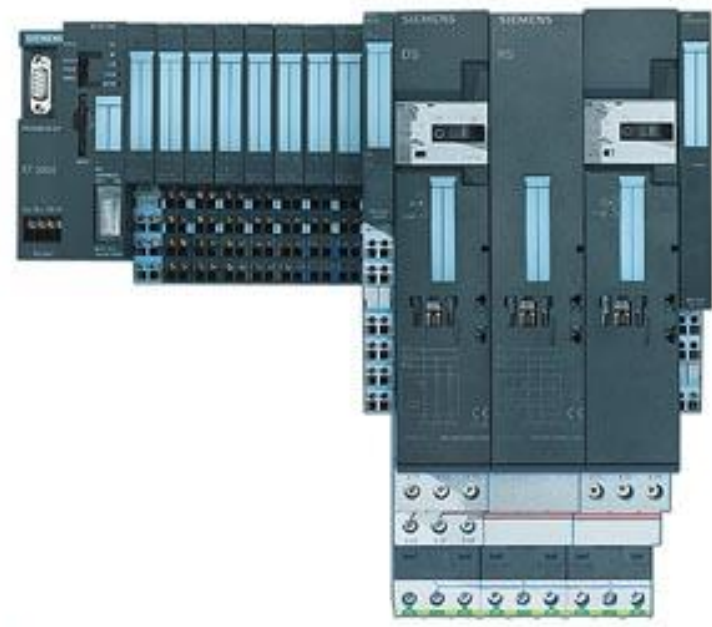


Figure similar

General technical data:		
product brandname		Local Safety Modules
Product designation		PM-D F4
Design of the product		for safety circuits
Protection class IP		IP20
Product function		
• Bus communication		Yes
• Short circuit protection		No
Operating current at 400 V rated value	A	4
SIL Claim Limit (subsystem) acc. to EN 62061		3
Category acc. to EN ISO 13849-1		4
Electrical endurance (switching cycles) typical		200 000
Mechanical service life (switching cycles) typical		10 000 000
Control circuit/ Control:		
Type of voltage of the control supply voltage		DC
Control supply voltage at DC		
• rated value	V	24

• rated value

V	20.4 ... 28.8
---	---------------

Installation/ mounting/ dimensions:

Width	mm	30
Height	mm	196.5
Depth	mm	117.5

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
--------------------------	---------------------------------------	---------------------------



CCC



CSA



UL



[Type Examination Certificate](#)



EG-Konf.

Test Certificates	other
-------------------	-------

[Type Test Certificates/Test Report](#)

[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-1BC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-1BC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-1BC00&lang=en

last modified:

08/11/2017