



COMMUNICATION MODULE COM060 ACCESSORY FOR:
3VA2 100/160/250

Similar to image

Allgemeine Technische Daten:		
Accessories		Communication and measurement function
Maße und Gewichte		
mounting position		Right switch pocket
Width	mm	29
Height	mm	63
Depth	mm	33
Number of slots		4
Net weight	g	90
Funktionen		
Product function		
• voltage supply of the electronic trip unit		Yes
• data exchange with the electronic trip unit		Yes
• acquisition of switch position: On, Off, Tripped		Yes
• Communication with function module		Yes
Versorgung		
Apparent power loss / rated value	V·A	2.4

Consumed current / maximum	A	0.1
----------------------------	---	-----



Kommunikation		
Number of interfaces / of the circuit breaker communication system		1
Length / of supplied connecting cable / for circuit breaker communication system	m	0.15
Design of electrical connection / of the circuit breaker communication interface		Spur line via T feeder
Total length / of the circuit breaker communication system	m	20

Umgebungsbedingungen		
Ambient temperature		
• during operating	°C	-25 ... +70
• during transport	°C	-40 ... +80
• during storage	°C	-40 ... +80
Degree of pollution		3
Overvoltage class		1

Schutzart und Schutzklasse		
Operating resource protection class		III according to IEC61558
Protection class IP		20 acc. to IEC60529

Certificates/approvals:	
Declaration of Conformity	

Further information:	
Information- and Downloadcenter (Catalogs, Brochures,...)	http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)	https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9187-0TB10
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	http://support.automation.siemens.com/WW/view/en/3VA9187-0TB10/all
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)	http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9187-0TB10
CAX-Online-Generator	http://www.siemens.com/cax

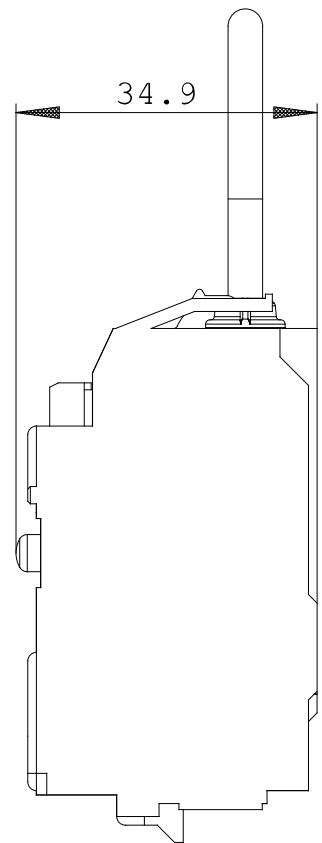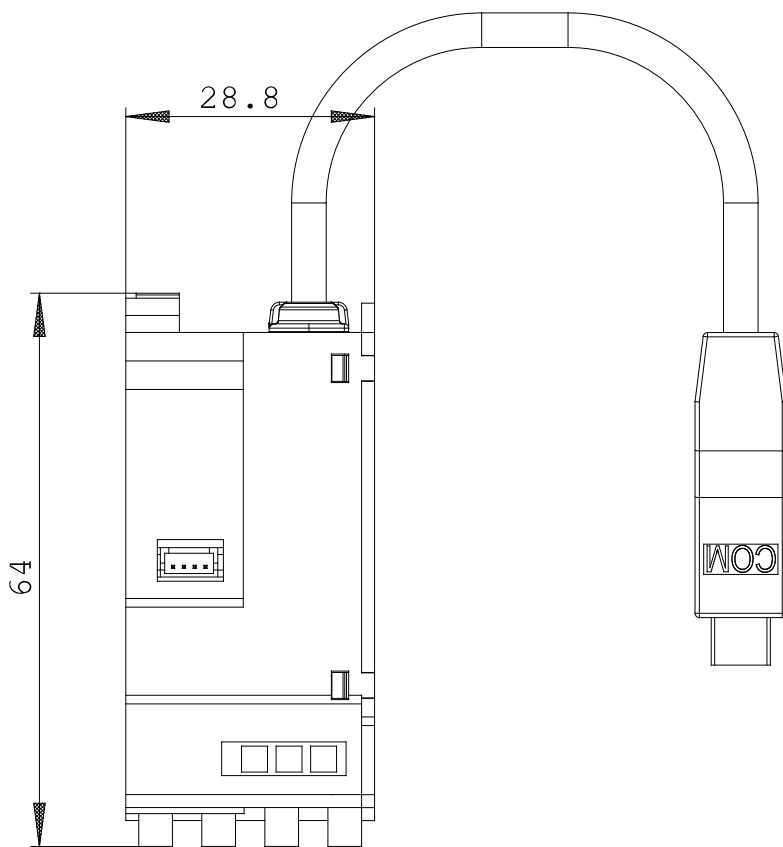

last change:

Apr 21, 2014