



UNDervOLTAGE RELEASE 12 V DC ACCESSORY FOR
3VA1 100/160 3VA2 100/160/250/400/630

Similar to image

Technical data:

Accessories		Auxiliary release
Number of slots		3
Conductor cross-section that can be connected		
• solid	mm ²	0.5 ... 1.5
Torque	N·m	0.4
Wire stripping length	mm	10
Insulation voltage / rated value	V	690
Overvoltage class		III
Degree of pollution		3
Impulse voltage resistance	kV	4
Drawn active power		
• for DC / maximum	W	2.5

Certificates/approvals:

Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9908-0BB10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3VA9908-0BB10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9908-0BB10

CAX-Online-Generator

<http://www.siemens.com/cax>

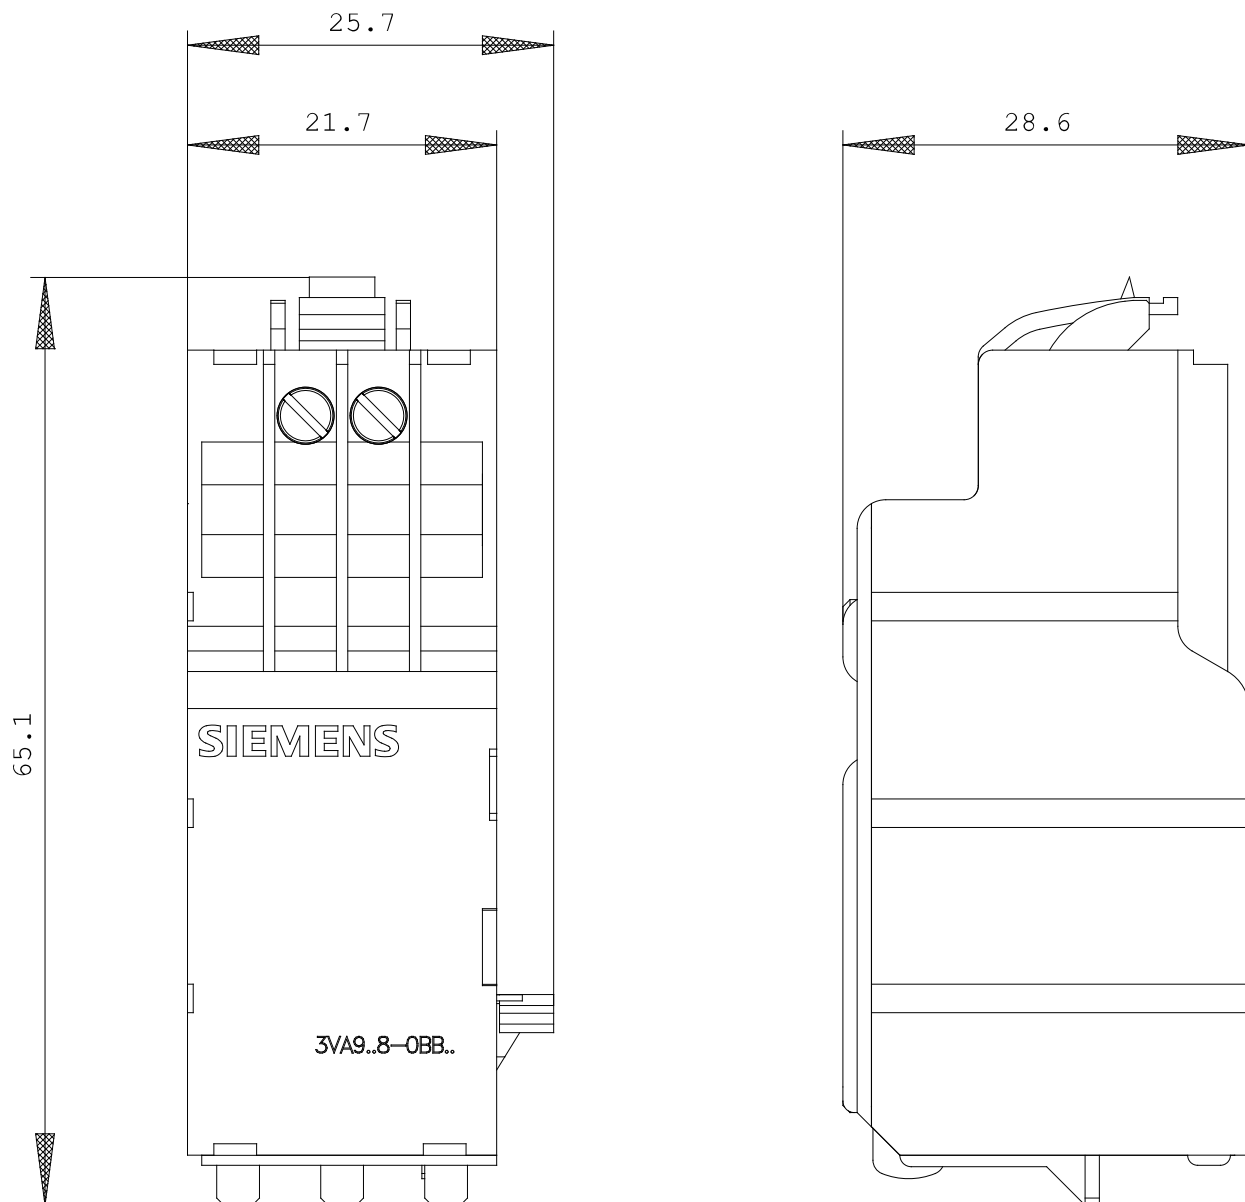

last change:

Apr 21, 2014