



SHUNT TRIP LEFT 208-277 V AC 50/60 HZ 220-250 V DC
ACCESSORY FOR 3VA UPTO 630 A

Similar to image

Technical data:		
Accessories		Auxiliary release
Number of slots		3
Conductor cross-section that can be connected		
• solid	mm²	0.5 ... 1.5
Torque	N·m	0.4
Wire stripping length	mm	10
Insulation voltage / rated value	V	690
Overvoltage class		III
Degree of pollution		3
Impulse voltage resistance	kV	4
Drawn active power		
• for DC / maximum	W	35

Certificates/approvals:	
Declaration of Conformity	

Further information:	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/lowvoltage/catalogs	

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9988-0BL33>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3VA9988-0BL33/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL33

CAX-Online-Generator

<http://www.siemens.com/cax>

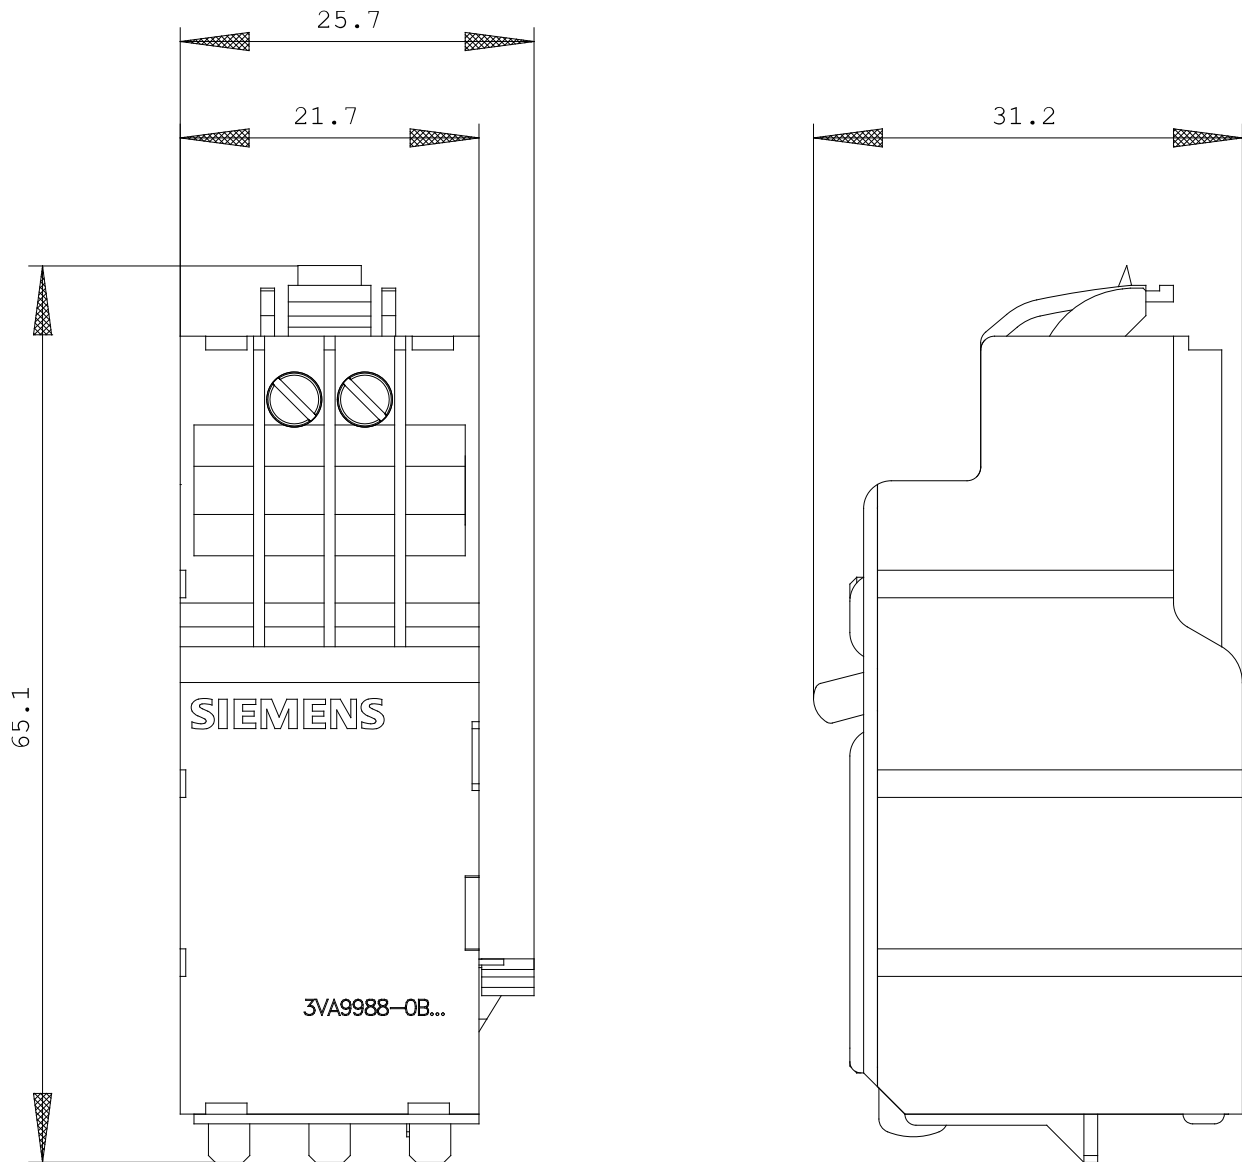

last change:

Apr 21, 2014