



ACTIVATION & TRIP BOX TD300 INCL. CONNECTION
CABLE 3VA - TD300 ACCESSORY FOR: 3VA2

Similar to image

Allgemeine Technische Daten:		
Accessories		Test device
Mechanische Eigenschaften		
Height	mm	107
Width	mm	76
Depth	mm	25
Protection class IP		IP30
Ambient temperature		
• during operating	°C	-10 ... +40
• during storage	°C	-40 ... +50
• with built-in battery		
• during storage	°C	0 ... 25
mounting position		any
Schnittstelle zum Leistungsschalter		
Number of circuit breakers / directly connectable		1
Length / of the connecting cable	m	1
Spannungsversorgung		

Type of battery	AA, alkaline, 1.5 V
-----------------	---------------------

Certificates/approvals:

Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9987-0MA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3VA9987-0MA10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9987-0MA10

CAX-Online-Generator

<http://www.siemens.com/cax>

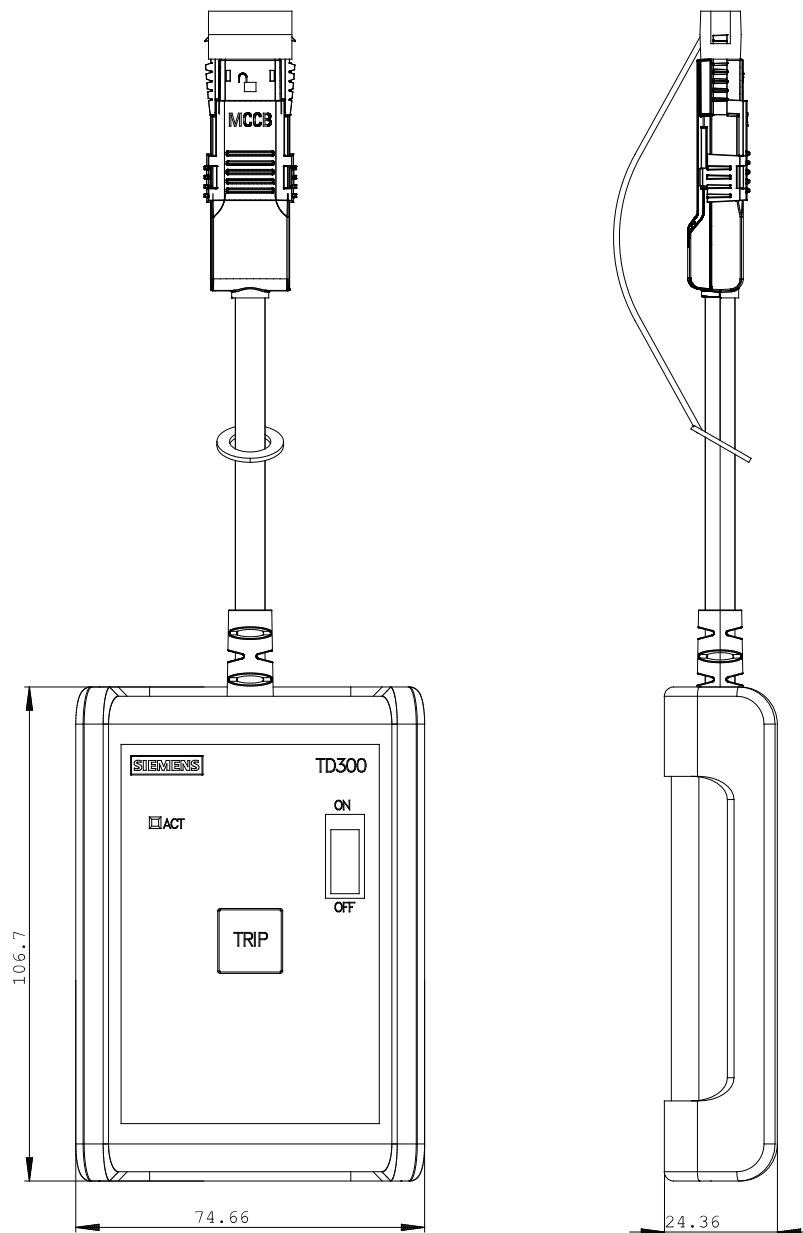

last change:

Apr 21, 2014