




SHUNT TRIP FLEXIBLE 48-60 V AC 50/60 HZ
ACCESSORY FOR 3VA UPTO 600/630 A

Similar to image

Technical data:		
Accessories		Auxiliary release
Number of slots		3
Conductor cross-section that can be connected		
• solid	mm²	0.5 ... 1.5
Torque	N·m	0.4
Wire stripping length	mm	10
Insulation voltage / rated value	V	690
Overvoltage class		III
Degree of pollution		3
Impulse voltage resistance	kV	4

Certificates/approvals:	
Declaration of Conformity	

Further information:	
Information- and Downloadcenter (Catalogs, Brochures,...)	http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)	https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9988-0BA21

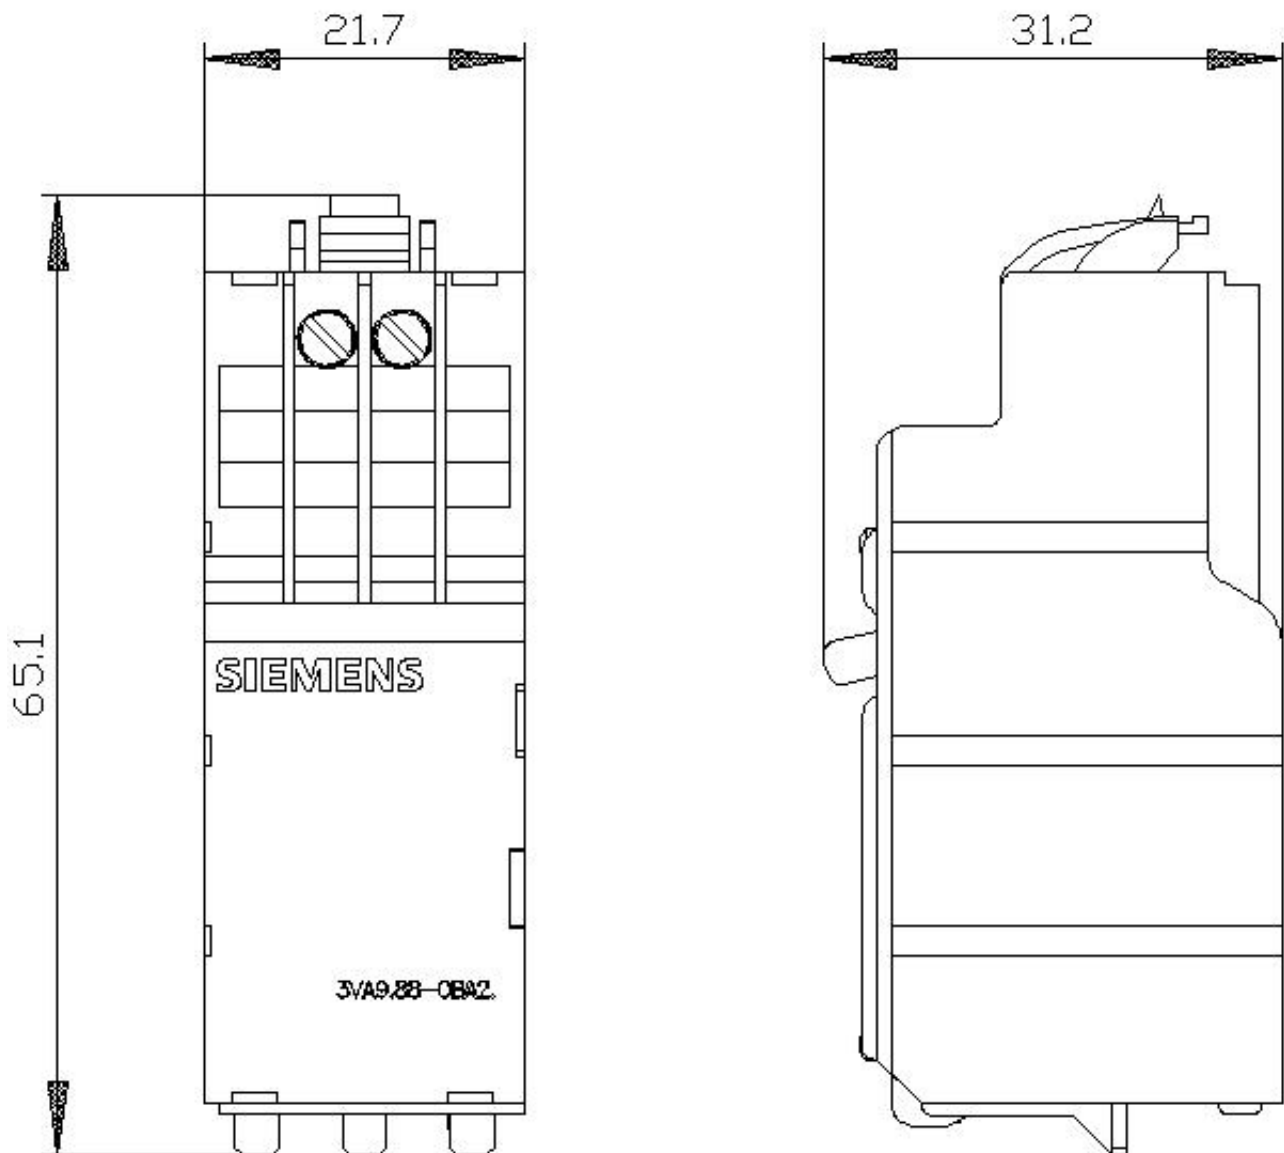

last change:

Apr 21, 2014