



UNDervoltage RELEASE 48 V AC 50/60HZ
ACCESSORY FOR 3VA1 100/160 3VA2
100/160/250/400/630

Similar to image

Technical data:

Accessories		Auxiliary release
Number of slots		3
Conductor cross-section that can be connected		
• solid	mm ²	0.5 ... 1.5
Torque	N·m	0.4
Wire stripping length	mm	10
Insulation voltage / rated value	V	690
Overvoltage class		III
Degree of pollution		3
Impulse voltage resistance	kV	4

Certificates/approvals:

Declaration of Conformity


Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9908-0BB21>

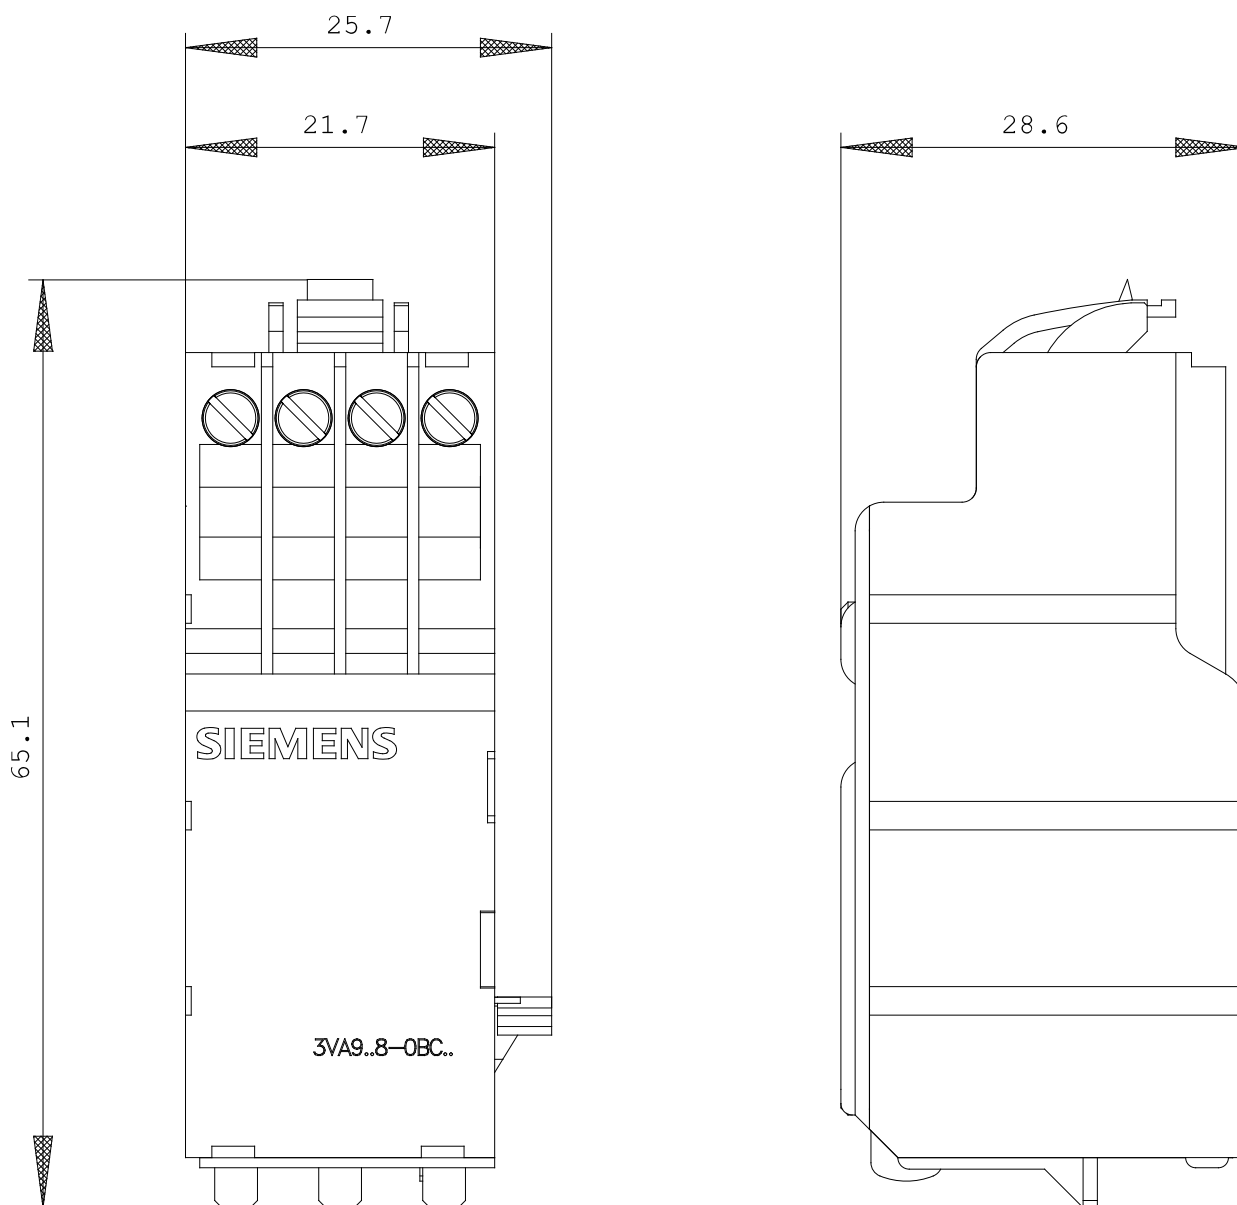

last change:

Apr 21, 2014