

Additional mounting BU for ET 200SP motor starter containing 5 units

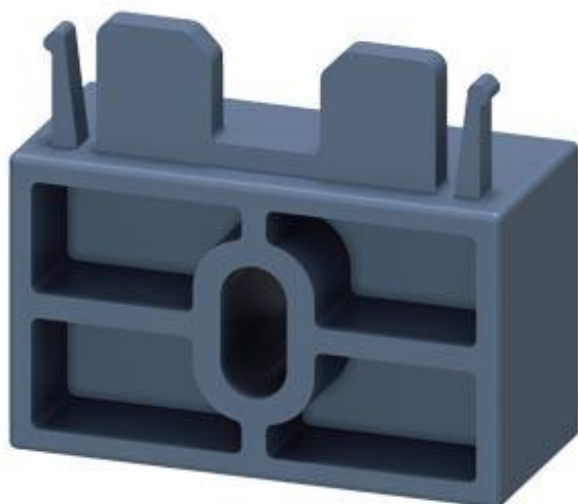


Figure similar

Product category	Accessories
Product designation	Mechanical bracket
Design of the product	Mechanical, for ET 200SP
Product type designation	Mechanical additional fastening for BaseUnit
General technical data	
Product function	Zubehör
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal, flat
Mounting type	pluggable on BaseUnit
Height	26 mm
Width	30 mm
Depth	14 mm
Ambient conditions	

Ambient temperature

- during operation
- during storage
- during transport

-25 ... +60 °C

-40 ... +70 °C

-40 ... +70 °C

Certificates/approvals

General Product Approval



[Type Test
Certificates/Test
Report](#)



Shipping Approval

other



LRS

[Confirmation](#)

[Environmental
Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-1EA00-1BP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-1EA00-1BP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-1EA00-1BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-1EA00-1BP0&lang=en

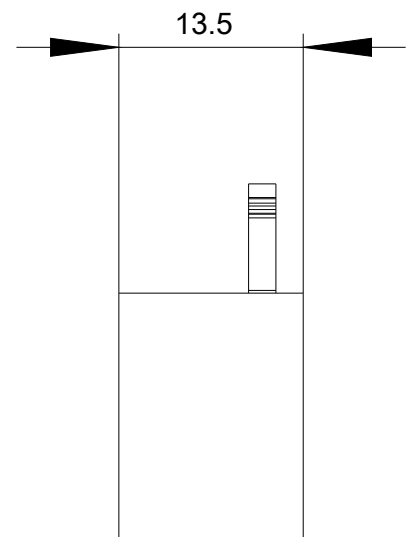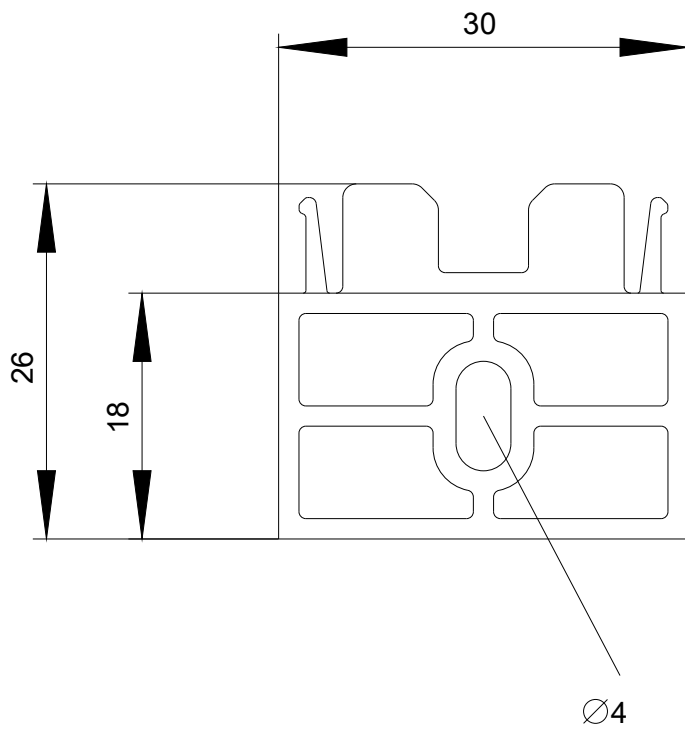

last modified:

10/06/2017