



Figure similar

Article number		
Product brand name		SIRIUS
Product category		Connecting combs
Product designation		Connecting comb
Design of the product		For linking the same potentials, current carrying capacity for infeed max. 6 A/2-pole

General technical data		
Display version LED		No
Product component		
• semi-conductor output		No
Equipment marking		
• acc. to DIN EN 61346-2		X
• acc. to DIN EN 81346-2		X
Product component Plug-in socket		No



Connections/Terminals		
Product function		
• removable terminal		No

Installation/ mounting/ dimensions		
Height	mm	3.3
Width	mm	12.5
Depth	mm	11

Ambient conditions		
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85

Certificates/approvals			
General Product Approval	Declaration of Conformity	Marine / Shipping	other
			Confirmation

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3901-0A
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3901-0A
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RQ3901-0A
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RQ3901-0A&lang=en

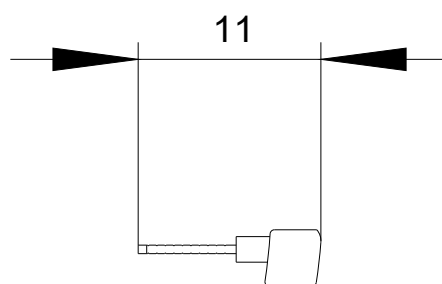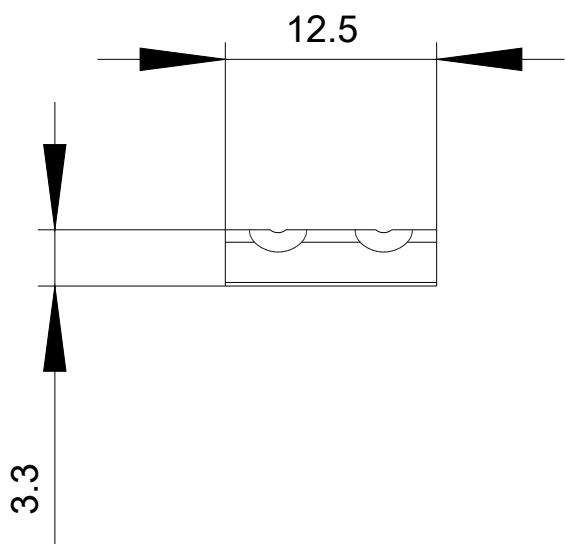

last modified:

07/24/2017