

2DI DC24V CONTROL MODULE/COM F. ET200S
HIGH FEATURE STARTER FOR LOCAL STARTER
FUNCTIONS WITH COM-INTERFACE FOR PC-CABLE
6ED1057-1AA00-0BA0



Figure similar

General technical data:		
Product designation		Control module 2DI 24 V DC COM
Product description		digital input module with two inputs for local motor starter functions for front mounting
Protection class IP		IP20
Mounting height	mm	45
Installation width	mm	23.8
Installation depth	mm	23
Type of connectable conductor cross-sections		
• solid		1x (0.14 ... 2.5 mm²), acc. to IEC 60947
• finely stranded with core end processing		2x (0.14 ... 1)
• at AWG conductors		
— solid		1x (18 ... 22)
— stranded		1x (18 ... 22)
Number of digital inputs		2
Ambient temperature		
• during storage	°C	0 ... 60

- during operation

°C

-40 ... +80

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-0CH10>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-0CH10>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-0CH10&lang=en

-X1

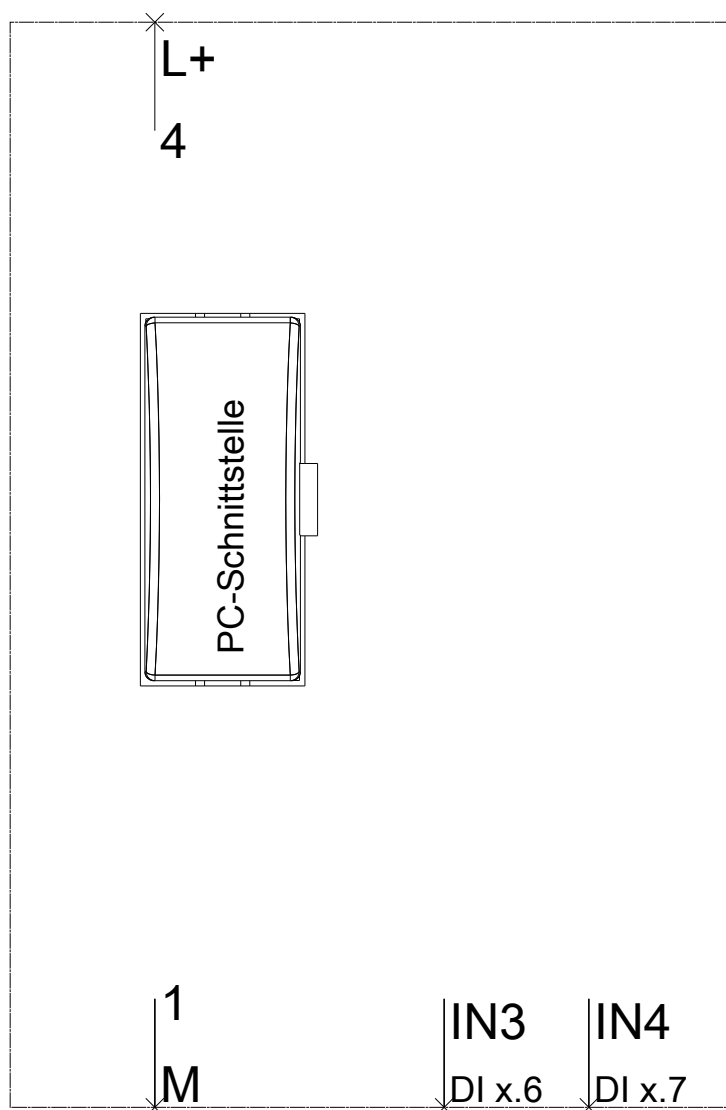

-X1

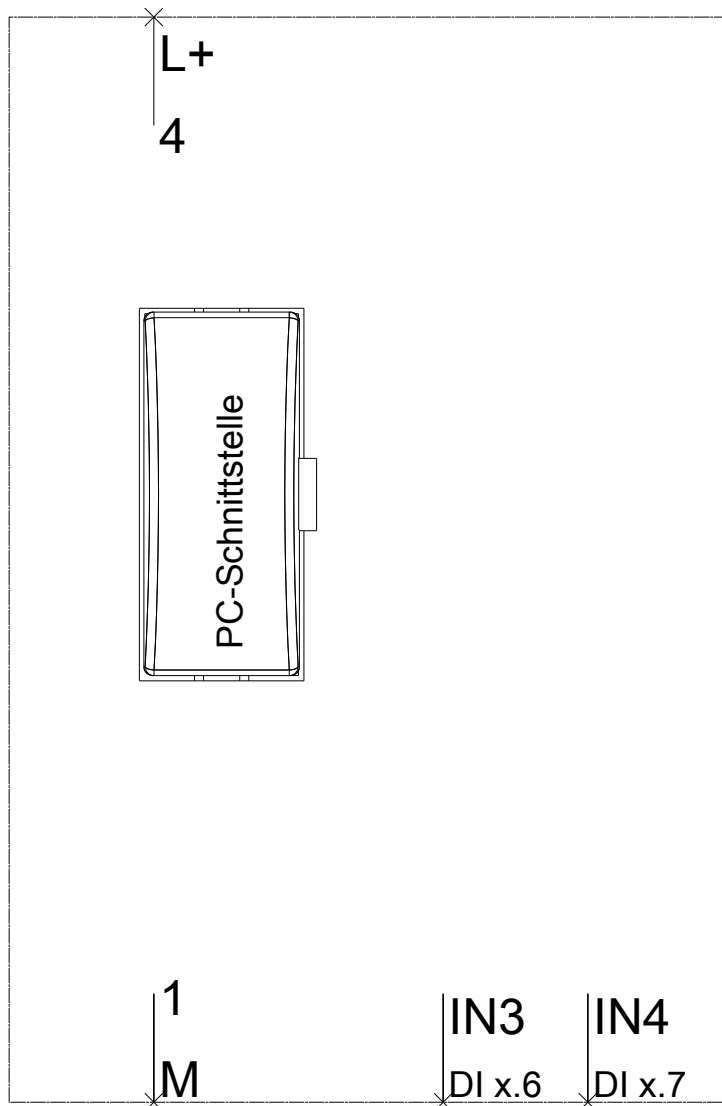

last modified:

07/29/2017