

OVERLOAD RELAY 12,5...50 A FOR MOTOR PROTECTION SIZE S3, CLASS 20E F. MOUNTING ONTO CONTACTORS MAIN CIRCUIT: SCREW TERMINAL AUX. CIRCUIT: SPRING-T. TERM. MANUAL-AUTOMATIC RESET

Product brand name	SIRIUS
Product designation	solid-state overload relay
Product type designation	3RB3

General technical data

Size of overload relay	S3
Size of contactor can be combined company-specific	S3
Power loss [W] total typical	0.9 W
Insulation voltage with degree of pollution 3 rated value	1 000 V
Surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation <ul style="list-style-type: none"> in networks with grounded star point between auxiliary and auxiliary circuit in networks with grounded star point between auxiliary and auxiliary circuit in networks with grounded star point between main and auxiliary circuit in networks with grounded star point between main and auxiliary circuit 	300 V 300 V 600 V 690 V
Protection class IP <ul style="list-style-type: none"> on the front of the terminal 	IP20 IP00
Vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
Thermal current	50 A
Recovery time <ul style="list-style-type: none"> after overload trip with automatic reset typical after overload trip with remote-reset after overload trip with manual reset 	3 min 0 min 0 min
Type of protection	II (2) G [Ex e] [Ex d] [Ex px] II (2) D [Ex t] [Ex p]
Protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529
Equipment marking acc. to DIN EN 81346-2	F

Ambient conditions

Ambient temperature <ul style="list-style-type: none"> during operation 	-25 ... +60 °C
--	----------------

• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
Temperature compensation	60 ... -25 °C

Main circuit

Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	12.5 ... 50 A
Operating voltage	
• rated value	1 000 V
• at AC-3 rated value maximum	1 000 V
Operating frequency rated value	50 ... 60 Hz
Operating current rated value	50 A
Operating power for three-phase motors at 400 V at 50 Hz	7.5 ... 22 kW

Auxiliary circuit

Design of the auxiliary switch	integrated
Number of NC contacts	
• for auxiliary contacts	1
— Note	for contactor disconnection
Number of NO contacts	
• for auxiliary contacts	1
— Note	for message "tripped"
Number of CO contacts	
• for auxiliary contacts	0
Operating current of auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

Protective and monitoring functions

Trip class	CLASS 20E
Design of the overload release	electronic

UL/CSA ratings

Full-load current (FLA) for three-phase AC motor	
---	--

• at 480 V rated value	50 A
• at 600 V rated value	50 A
Contact rating of auxiliary contacts according to UL	B600 / R300

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 200 A
— with type of assignment 2 required	gG: 200 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	direct mounting
Height	106 mm
Width	70 mm
Depth	124 mm
Required spacing	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	6 mm

Connections/Terminals

Product function	
• removable terminal for auxiliary and control circuit	Yes
Type of electrical connection	
• for main current circuit	screw-type terminals

• for auxiliary and control current circuit	spring-loaded terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (2.5 ... 16 mm ²)
— stranded	2x 16 mm ²
— single or multi-stranded	1x (2,5 ... 70 mm ²), 2x (2,5 ... 50 mm ²)
— finely stranded with core end processing	1x (2,5 ... 50 mm ²), 2x (2,5 ... 35 mm ²)
• at AWG conductors for main contacts	1x (10 ... 2/0), 2x (10 ... 1/0)
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	2x (0.25 ... 1.5 mm ²)
— single or multi-stranded	2x (0,25 ... 1,5 mm ²)
— finely stranded with core end processing	2x (0.25 ... 1.5 mm ²)
— finely stranded without core end processing	2x (0.25 ... 1.5 mm ²)
• at AWG conductors for auxiliary contacts	2x (24 ... 16)
Tightening torque	
• for main contacts with screw-type terminals	4.5 ... 6 N·m
Design of screwdriver shaft	Diameter 5 to 6 mm
Size of the screwdriver tip	Pozidriv PZ 2
Communication/ Protocol	
Type of voltage supply via input/output link master	No
Electromagnetic compatibility	
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Display	
Display version	
• for switching status	Slide switch
Certificates/approvals	

General Product Approval	For use in hazardous locations	Declaration of Conformity	Marine / Shipping
--------------------------	--------------------------------	---------------------------	-------------------



CSA



UL



ATEX



EG-Konf.



PRS

Marine / Shipping	other
-------------------	-------



RINA

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3046-2UD0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3046-2UD0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3046-2UD0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3046-2UD0&lang=en

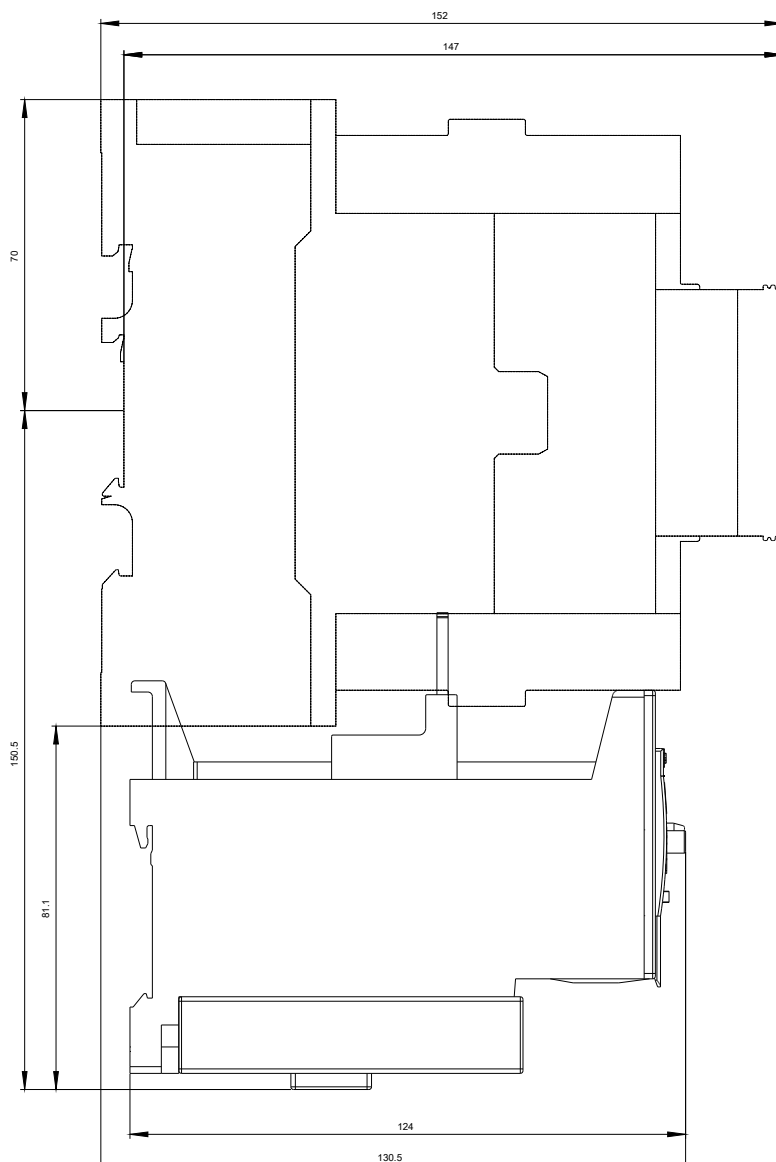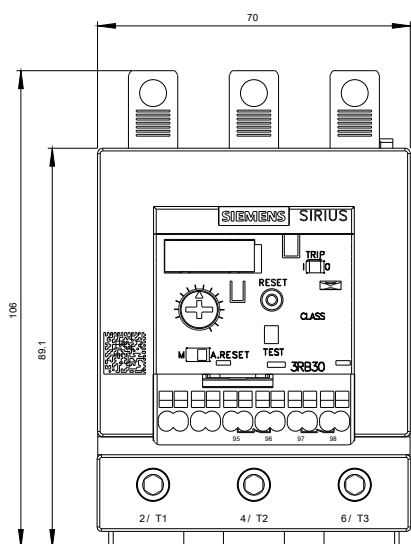

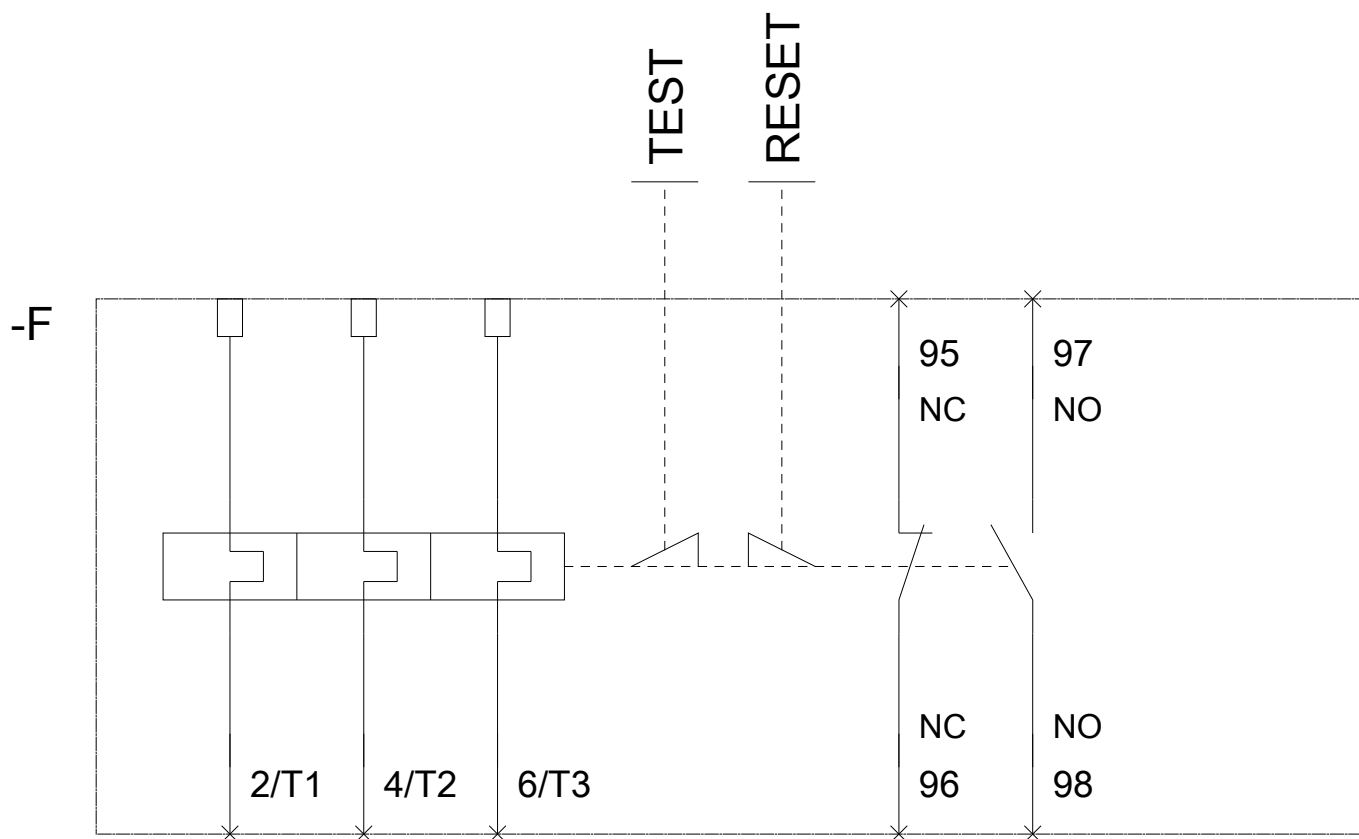

last modified:

08/07/2017