

SIRIUS, COMPACT STARTER, DIRECT STARTER . 690 V, 24 V DC, 0.32 ... 1.25 A, IP20, CONN. MAIN CIRCUIT: PLUG-IN, W/O TERMINALS, CONN. CONTROL CIRCUIT: SPRING-LOADED TERMINAL



<b>Product brand name</b>	SIRIUS
<b>Product designation</b>	compact starter
<b>Design of the product</b>	direct starter
<b>General technical data</b>	
<b>Product function</b>	
• Control circuit interface to parallel wiring	No
<b>Product extension</b>	
• Auxiliary switch	Yes
<b>Insulation voltage</b>	
• rated value	690 V
<b>Degree of pollution</b>	3
<b>Surge voltage resistance rated value</b>	6 000 V
<b>Protection class IP</b>	IP20
<b>Vibration resistance</b>	$f = 4 \dots 5.8 \text{ Hz}, d = 15 \text{ mm}; f = 5.8 \dots 500 \text{ Hz}, a = 20 \text{ m/s}^2; 10 \text{ cycles}$
<b>Mechanical service life (switching cycles)</b>	
• of the main contacts typical	10 000 000
• of auxiliary contacts typical	10 000 000
• of the signaling contacts typical	10 000 000

<b>Electrical endurance (switching cycles) of auxiliary contacts</b>	
• at DC-13 at 6 A at 24 V typical	30 000
• at AC-15 at 6 A at 230 V typical	200 000
<b>Type of assignment</b>	continuous operation according to IEC 60947-6-2
<b>Equipment marking</b>	
• acc. to DIN EN 61346-2	Q
• acc. to DIN EN 81346-2	Q
<b>Ambient conditions</b>	
<b>Ambient temperature</b>	
• during operation	-20 ... +60 °C
• during storage	-55 ... +80 °C
• during transport	-55 ... +80 °C
<b>Main circuit</b>	
<b>Number of poles for main current circuit</b>	3
<b>Adjustable pick-up value current of the current-dependent overload release</b>	0.32 ... 1.25 A
<b>Formula for making capacity limit current</b>	$38.4 \times I_e$
<b>Formula for interruption capacity limit current</b>	$32 \times I_e$
<b>Mechanical power output for 4-pole AC motor</b>	
• at 400 V rated value	0.37 kW
• at 500 V rated value	0.55 kW
• at 690 V rated value	0.75 kW
<b>Operating voltage</b>	
• at AC-3 rated value maximum	690 V
<b>Operating current</b>	
• at AC at 400 V rated value	1.25 A
• at AC-43	
— at 400 V rated value	1.1 A
— at 500 V rated value	1.2 A
— at 690 V rated value	1.1 A
<b>No-load switching frequency</b>	3 600 1/h
<b>Operating frequency</b>	
• at AC-41 acc. to IEC 60947-6-2 maximum	750 1/h
• at AC-43 acc. to IEC 60947-6-2 maximum	250 1/h
<b>Control circuit/ Control</b>	
<b>Type of voltage</b>	DC
<b>Holding power</b>	
• at DC maximum	2.9 W
<b>Auxiliary circuit</b>	
<b>Number of NC contacts</b>	

• for auxiliary contacts	0
<b>Number of NO contacts</b>	
• for auxiliary contacts	0
• of instantaneous short-circuit trip unit for signaling contact	0
<b>Number of CO contacts</b>	
• of the current-dependent overload release for signaling contact	0
<b>Operating current of auxiliary contacts at AC-12 maximum</b>	10 A
<b>Operating current of auxiliary contacts at DC-13</b>	
• at 250 V	0.27 A

<b>Protective and monitoring functions</b>	
<b>Trip class</b>	CLASS 10 and 20 adjustable
<b>Off-delay time</b>	50 ms
<b>Operational short-circuit current breaking capacity (Ics)</b>	
• at 400 V	53 kA
• at 500 V rated value	3 kA
• at 690 V rated value	3 kA

<b>UL/CSA ratings</b>	
<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V rated value	1.25 A
• at 600 V rated value	1.25 A
<b>Yielded mechanical performance [hp]</b>	
• for three-phase AC motor	
— at 460/480 V rated value	0.5 hp
— at 575/600 V rated value	0.5 hp

<b>Short-circuit protection</b>	
<b>Product function Short circuit protection</b>	Yes
<b>Design of the fuse link</b>	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

<b>Installation/ mounting/ dimensions</b>	
<b>Mounting position</b>	any
• recommended	vertical, on horizontal standard mounting rail
<b>Mounting type</b>	screw and snap-on mounting
<b>Height</b>	191 mm
<b>Width</b>	45 mm
<b>Depth</b>	165 mm

<b>Connections/Terminals</b>
------------------------------

<b>Product function</b>	<ul style="list-style-type: none"> <li>removable terminal for main circuit</li> <li>removable terminal for auxiliary and control circuit</li> </ul>	Yes Yes
<b>Type of electrical connection</b>	<ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul>	plug-in without terminals spring-loaded terminals
<b>Type of connectable conductor cross-sections</b>	<ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for main contacts</li> </ul>	2x (1.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (1.5 ... 6 mm <sup>2</sup> ) 2x (1.5 ... 6 mm <sup>2</sup> ) 2x (16 ... 10), 1x 8
<b>Type of connectable conductor cross-sections</b>	<ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (24 ... 16)
<b>Safety related data</b>		
<b>B10 value</b>	<ul style="list-style-type: none"> <li>with high demand rate acc. to SN 31920</li> </ul>	3 000 000
<b>Proportion of dangerous failures</b>	<ul style="list-style-type: none"> <li>with high demand rate acc. to SN 31920</li> </ul>	50 %
<b>Communication/ Protocol</b>		
<b>Product function Bus communication</b>		Yes
<b>Protocol is supported</b>	<ul style="list-style-type: none"> <li>IO-Link protocol</li> </ul>	Yes
<b>IO-Link transfer rate</b>		COM2 (38,4 kBaud)
<b>Point-to-point cycle time between master and IO-Link device minimum</b>		2.5 ms
<b>Type of voltage supply via input/output link master</b>		No
<b>Amount of data</b>		
<ul style="list-style-type: none"> <li>of the address area of the inputs with cyclical transfer total</li> <li>of the address area of the outputs with cyclical transfer total</li> </ul>	2 byte 2 byte	
<b>Electromagnetic compatibility</b>		
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>		80 ... 3000 MHz at 10V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>		8 kV

Conducted HF-interference emissions acc. to CISPR11	150 kHz ... 30 MHz Class A
Field-bound HF-interference emission acc. to CISPR11	30 ... 1000 MHz Class A

Supply voltage	
Supply voltage required Auxiliary voltage	Yes

Display	
Display version	<ul style="list-style-type: none"> <li>as status display of the input/output link device</li> </ul> <p>green/red dual LED</p>

Certificates/approvals	General Product Approval	EMC	Functional Safety/Safety of Machinery
------------------------	--------------------------	-----	---------------------------------------



CCC



CSA



UL



C-Tick



VDE

Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



EG-Konf.

Type Test  
Certificates/Test  
Report



Lloyds  
Register



Marine / Shipping	other
-------------------	-------



RMRS

Environmental  
Confirmations

Confirmation

## Further information


Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6400-2BB43>


Cax online generator  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6400-2BB43>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3RA6400-2BB43>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA6400-2BB43&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6400-2BB43&lang=en)

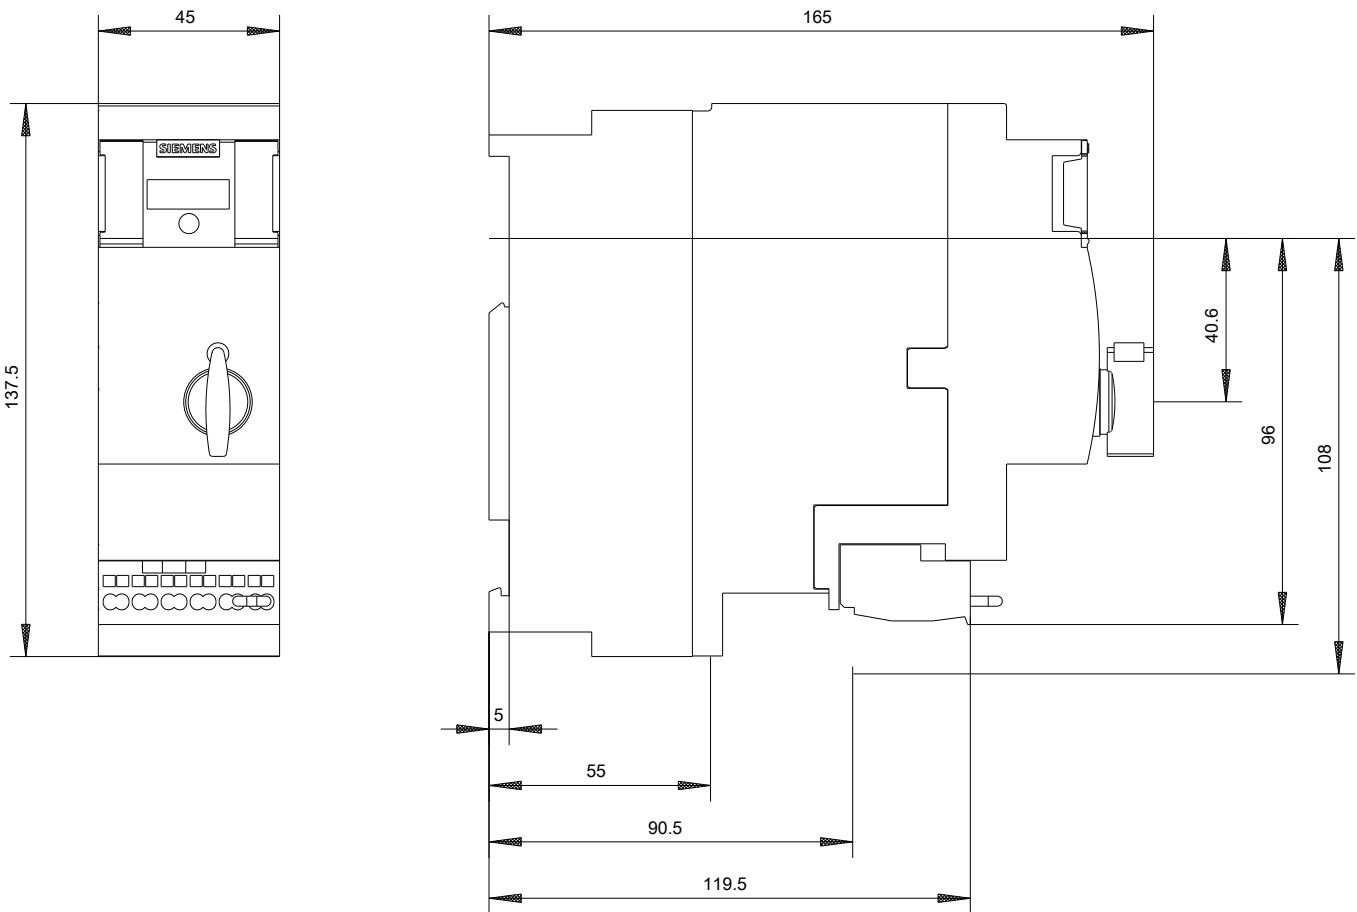



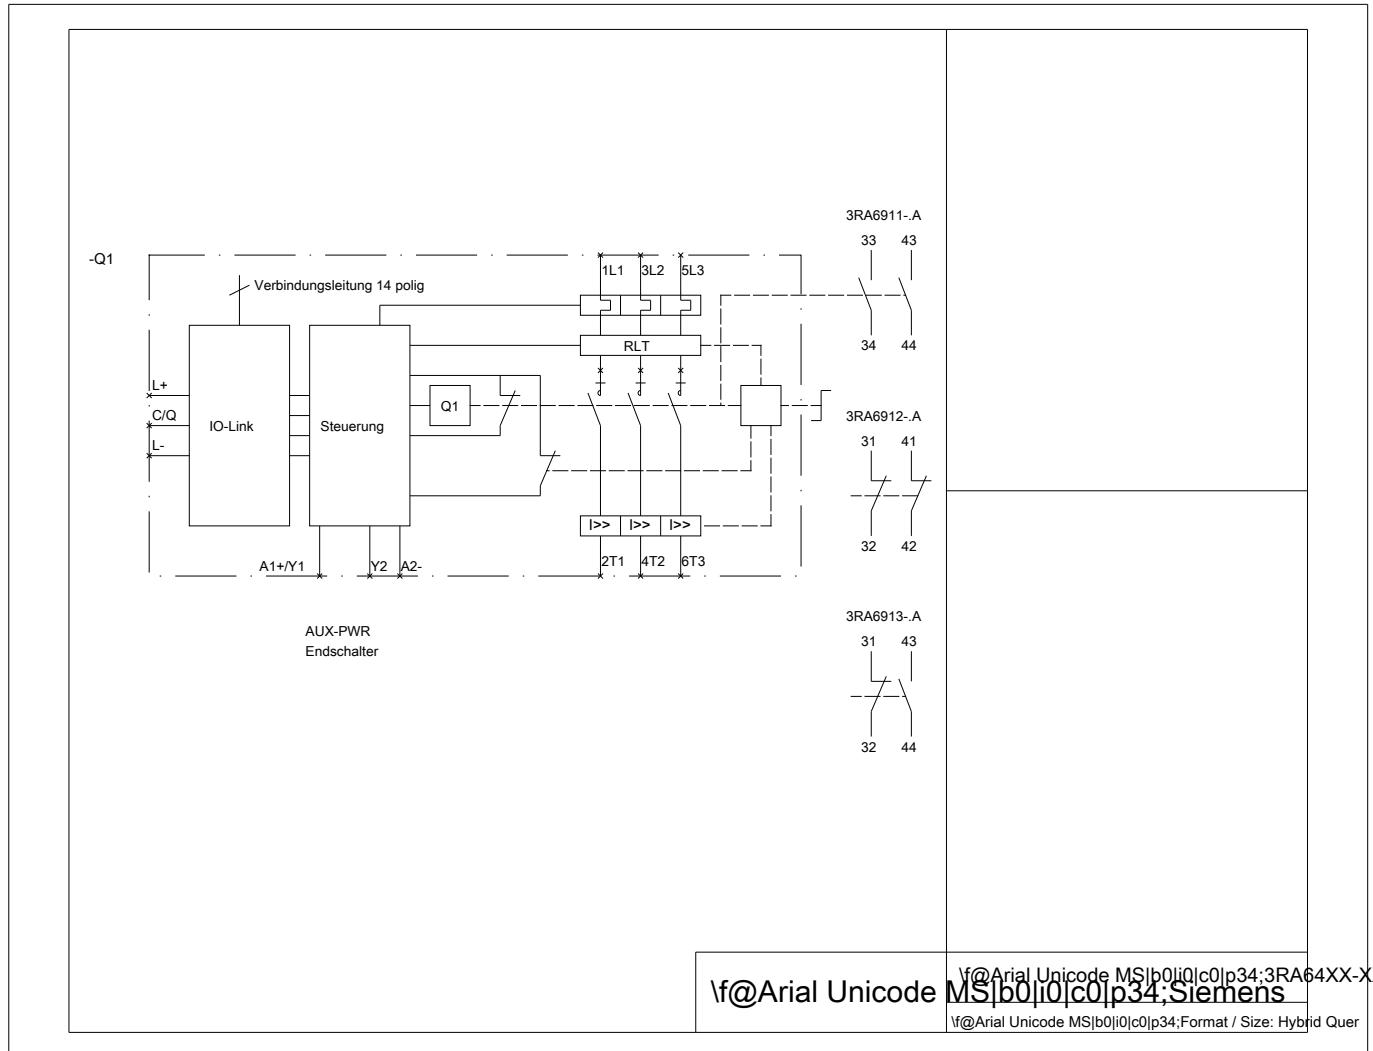

last modified:

07/14/2017