

REV. COMB., AC3, 7.5KW/ 400V AC230V, 50/60HZ, 3-POLE, SZ
S00 SPRING-LOADED TERMINAL ELECTR. AND MECH.
INTERLOCK



| | |
|-----------------------------------|-------------------------------|
| Product brand name | SIRIUS |
| Product designation | Reversing contactor assembly |
| Product type designation | 3RA23 |
| Manufacturer's article number | |
| • 1 of the supplied contactor | 3RT2018-2AP02 |
| • 2 of the supplied contactor | 3RT2018-2AP02 |
| • of the supplied RH assembly kit | 3RA2913-2AA2 |

| General technical data | |
|--|---------------------------|
| Size of contactor | S00 |
| Product extension | |
| • Auxiliary switch | Yes |
| Insulation voltage | |
| • with degree of pollution 3 rated value | 690 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 6 kV |
| Protection class IP | |
| • on the front | IP20 |
| Shock resistance at rectangular impulse | |
| • at AC | 7,3g / 5 ms, 4,7g / 10 ms |

| | |
|--|----------------------------|
| <ul style="list-style-type: none"> • at DC | 7.3g / 5 ms, 4.7g / 10 ms |
| Shock resistance with sine pulse | |
| <ul style="list-style-type: none"> • at AC | 11,4g / 5 ms, 7,3g / 10 ms |
| <ul style="list-style-type: none"> • at DC | 11,4g / 5 ms, 7,3g / 10 ms |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of contactor typical | 10 000 000 |
| <ul style="list-style-type: none"> • of the contactor with added auxiliary switch block typical | 10 000 000 |
| Equipment marking | |
| <ul style="list-style-type: none"> • acc. to DIN EN 81346-2 | Q |

Ambient conditions

| | |
|--|----------------|
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +60 °C |
| <ul style="list-style-type: none"> • during storage | -55 ... +80 °C |

Main circuit

| | |
|--|---|
| Number of poles for main current circuit | 3 |
| Number of NO contacts for main contacts | 3 |
| Number of NC contacts for main contacts | 0 |
| Operating voltage | |
| <ul style="list-style-type: none"> • at AC-3 rated value maximum | 690 V |
| Operating current | |
| <ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C rated value — at ambient temperature 60 °C rated value • at AC-2 at 400 V rated value • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value | 22 A 20 A 7 A 16 A |
| Operating current | |
| <ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value | 20 A 2.1 A 20 A 12 A 20 A 20 A |
| Operating current | |
| <ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value | 20 A 0.15 A |

| | |
|--|--|
| <ul style="list-style-type: none"> • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value | 20 A 0.35 A 20 A 20 A |
| No-load switching frequency | 1 500 1/h |
| Operating frequency <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum | 1 000 1/h 1 000 1/h 1 000 1/h 300 1/h |

| Control circuit/ Control | |
|--|-----------------------------|
| Type of voltage of the control supply voltage | AC |
| Control supply voltage 1 at AC <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | 230 V 230 V |
| Operating range factor control supply voltage rated value of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 0.8 ... 1.1 0.85 ... 1.1 |
| Apparent pick-up power of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz | 37 V·A |
| Inductive power factor with closing power of the coil <ul style="list-style-type: none"> • at 50 Hz | 0.8 |
| Apparent holding power of magnet coil at AC <ul style="list-style-type: none"> • at 50 Hz | 5.7 V·A |
| Inductive power factor with the holding power of the coil <ul style="list-style-type: none"> • at 50 Hz | 0.28 |

| Auxiliary circuit | |
|--|--|
| Operating current of auxiliary contacts at AC-12 maximum | 10 A |
| Operating current of auxiliary contacts at AC-15 <ul style="list-style-type: none"> • at 230 V • at 400 V | 6 A 3 A |
| Operating current of auxiliary contacts at DC-13 <ul style="list-style-type: none"> • at 24 V • at 60 V • at 110 V • at 220 V | 10 A 2 A 1 A 0.3 A |
| Contact reliability of auxiliary contacts | < 1 error per 100 million operating cycles |

| UL/CSA ratings | |
|---|--|
| Full-load current (FLA) for three-phase AC motor | |
| • at 480 V rated value | 14 A |
| • at 600 V rated value | 11 A |
| Yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 1 hp |
| — at 230 V rated value | 2 hp |
| • for three-phase AC motor | |
| — at 200/208 V rated value | 3 hp |
| — at 220/230 V rated value | 5 hp |
| — at 460/480 V rated value | 10 hp |
| — at 575/600 V rated value | 10 hp |
| Contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| Design of the fuse link | |
| • for short-circuit protection of the main circuit | |
| — with type of coordination 1 required | gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A |
| — with type of assignment 2 required | gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 25 A |
| • for short-circuit protection of the auxiliary switch required | fuse gL/gG: 10 A |
| Installation/ mounting/ dimensions | |
| Mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail |
| Height | 84 mm |
| Width | 90 mm |
| Depth | 83 mm |
| Required spacing | |
| • with side-by-side mounting | |
| — forwards | 6 mm |
| — Backwards | 0 mm |
| — upwards | 6 mm |
| — downwards | 6 mm |
| — at the side | 6 mm |
| • for grounded parts | |
| — forwards | 6 mm |
| — Backwards | 0 mm |
| — upwards | 6 mm |
| — at the side | 6 mm |

| | |
|------------------|------|
| — downwards | 6 mm |
| • for live parts | |
| — forwards | 6 mm |
| — Backwards | 0 mm |
| — upwards | 6 mm |
| — downwards | 6 mm |
| — at the side | 6 mm |

Connections/Terminals

| | |
|---|-----------------------------------|
| Type of electrical connection | |
| • for main current circuit | spring-loaded terminals |
| • for auxiliary and control current circuit | spring-loaded terminals |
| Type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid | 2x (0.5 ... 4 mm ²) |
| — single or multi-stranded | 2x (0,5 ... 4 mm ²) |
| — finely stranded with core end processing | 2x (0.5 ... 2.5 mm ²) |
| — finely stranded without core end processing | 2x (0.5 ... 2.5 mm ²) |
| • at AWG conductors for main contacts | 1x (20 ... 12) |
| Type of connectable conductor cross-sections | |
| • for auxiliary contacts | |
| — single or multi-stranded | 2x (0,5 ... 2,5 mm ²) |
| — finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²) |
| — finely stranded without core end processing | 2x (0.5 ... 1.5 mm ²) |
| • at AWG conductors for auxiliary contacts | 2x (20 ... 14) |





Safety related data

| | |
|---|-----------|
| B10 value | |
| • with high demand rate acc. to SN 31920 | 1 000 000 |
| Proportion of dangerous failures | |
| • with low demand rate acc. to SN 31920 | 40 % |
| • with high demand rate acc. to SN 31920 | 75 % |
| Failure rate [FIT] | |
| • with low demand rate acc. to SN 31920 | 100 FIT |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y |


Communication/ Protocol

| | |
|---|----|
| Product function Bus communication | No |
| Protocol is supported | |
| • AS-interface protocol | No |

Certificates/approvals

| General Product Approval | | | Declaration of Conformity | Test Certificates | |
|---|---|---|---|--|--|
|  |  |  |  | Type Test Certificates/Test Report | Special Test Certificate |
| CSA | UL | | EG-Konf. | | |

| Marine / Shipping | | | | | |
|---|---|---|---|---|---|
|  |  |  |  |  |  |
| ABS | BUREAU VERITAS | GL | LRS | PRS | RMRS |

| Marine / Shipping | other | Railway | |
|---|---|------------------------------|-------------------------------------|
|  | Environmental Confirmations | Confirmation | Vibration and Shock |
| DNV GL | | | |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2318-8XB30-2AP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2318-8XB30-2AP0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2318-8XB30-2AP0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2318-8XB30-2AP0&lang=en

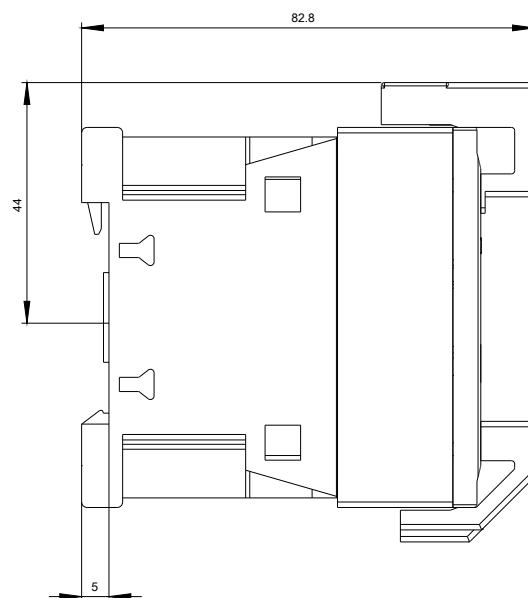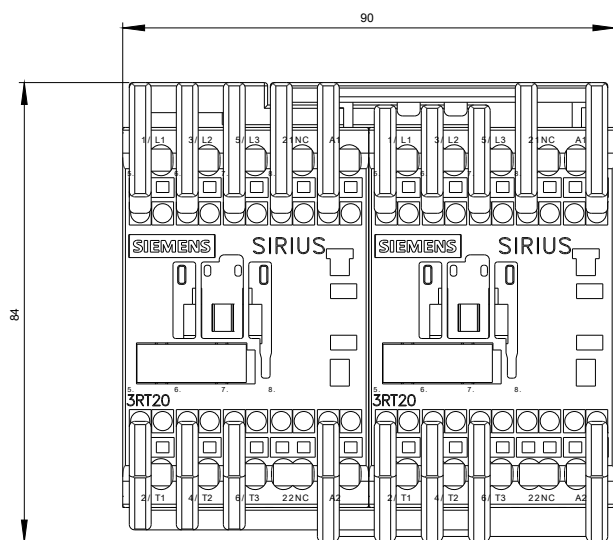

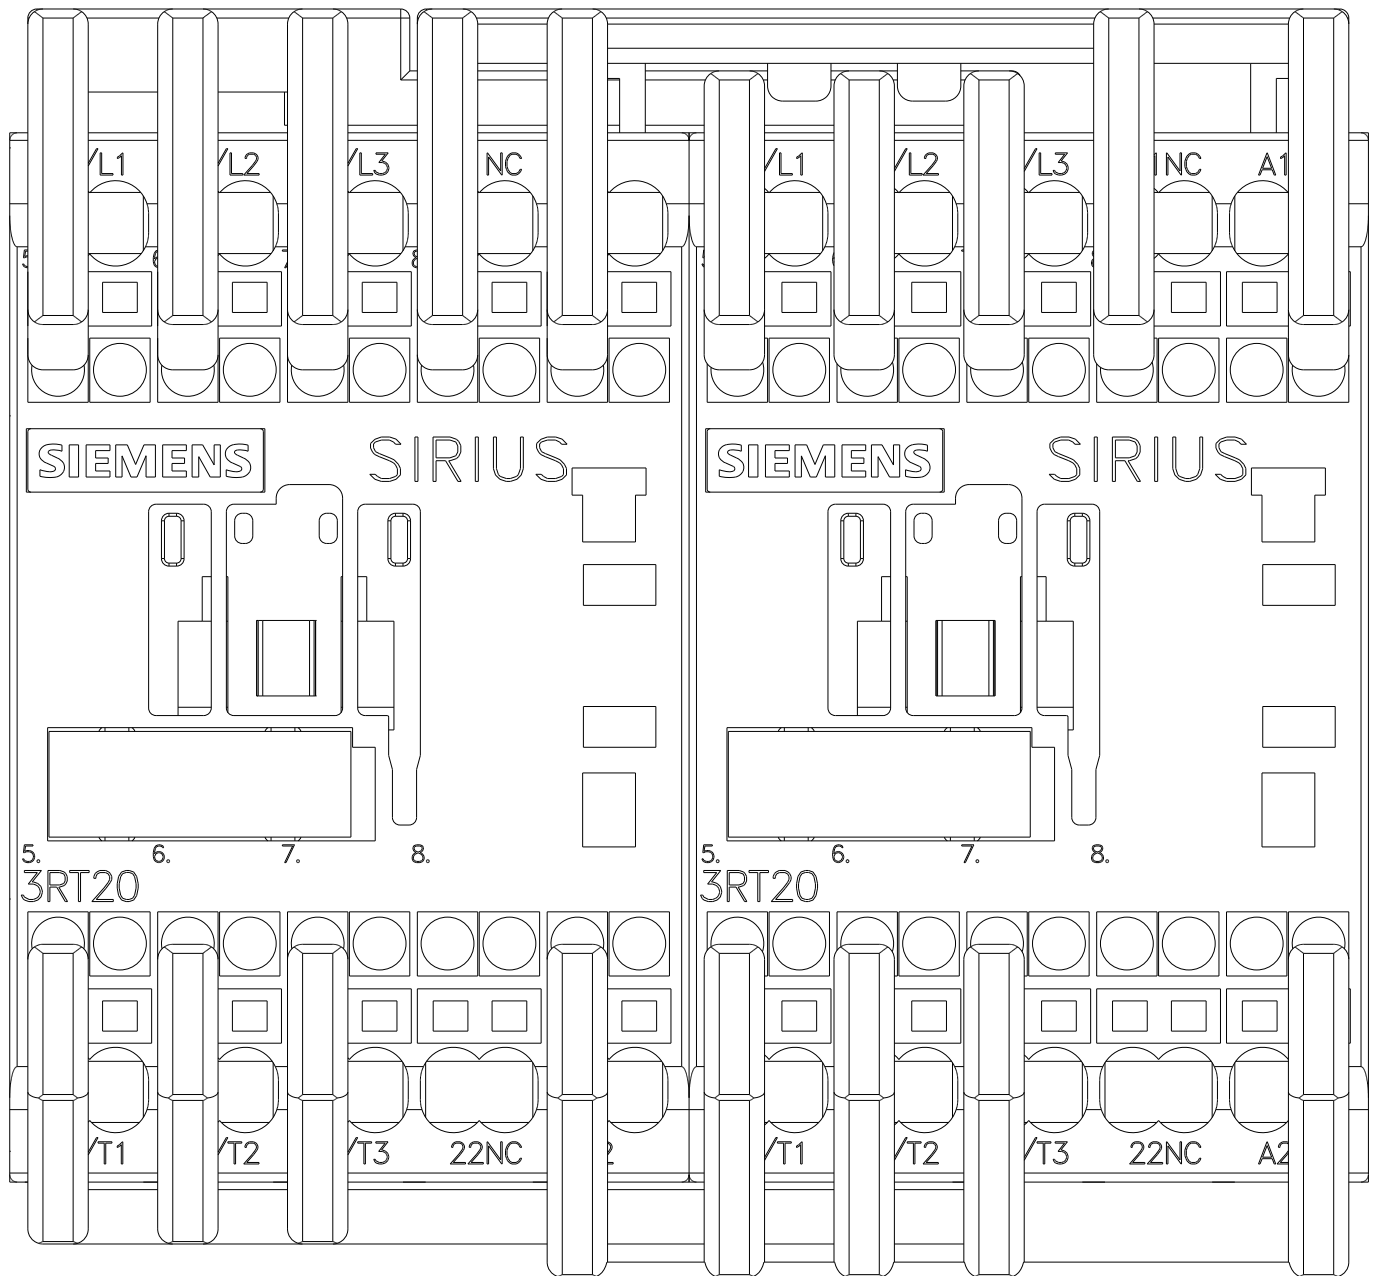

WENDEKOMBINATION BGR. S00

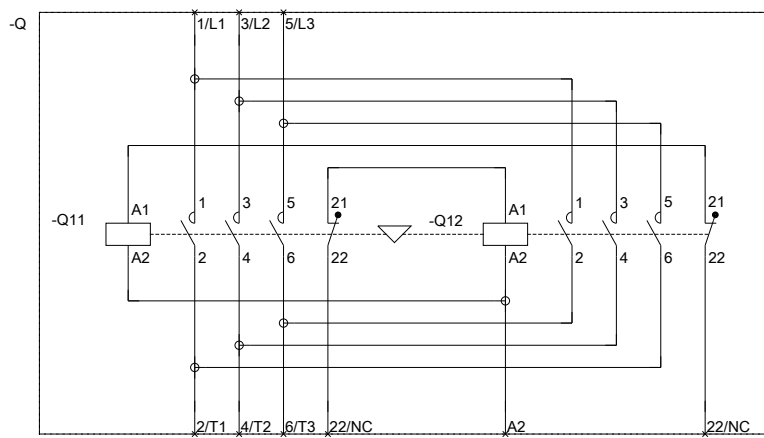

REVERSING COMB. SZ S00

last modified:

07/14/2017