

Select your language

- [German](#)
- [English](#)
- [Spanish](#)
- [French](#)
- [Dutch](#)
- [Italian](#)
- [Polish](#)
- [Czech](#)
- [Russian](#)
- [Norwegian Bokmål](#)

Worldwide English




MSFB-8-125A - Board, 8 outgoing, 405mm width, 125 A



191092 MSFB-8-125A

[Overview](#) [Specifications](#) [Resources](#)

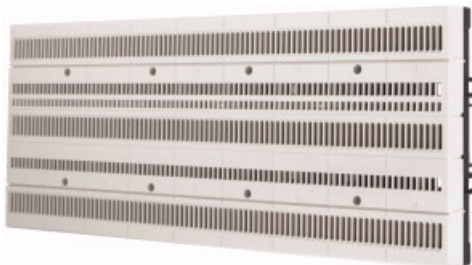

191092 MSFB-8-125A

Board, 8 outgoing, 405mm width, 125 A

Alternate Catalog No.

MSFB-8-125A

EL-Nummer (Norway)

2400348

Board 3 pole, for 8 outgoing, width: 405 mm, rated operating voltage: $U_e = 690$ V, rated operational current: $I_e = 125$ A, centre-line spacing: 60 mm, mounting position: horizontal, degree of protection: IP20

-
-

- [Delivery program](#)
- [Technical data](#)
- [Technical data ETIM 7.0](#)
- [Dimensions](#)

Delivery program

Product range
Accessories
Accessories
Board
Self-extinguishing
to UL 94
Width
405 mm
Pole
3
Rated operational current [I_e]
125 A
For use with
MSFA...

Technical data

General
Standards
EN 61439-1
Interval between busbar centres
60 mm
Mounting position
horizontal
Degree of Protection
IP20
Weight
1.37 kg
Contacts

Rated operational voltage [U_e]
690 V
Rated frequency [f]
50/60 Hz
Rated impulse withstand voltage [U_{imp}]
6 kV
Electrical data
Rated operational current [I_e]
125 A

Technical data ETIM 7.0

Energy distribution systems (EG000015) / Busbar system for distribution boards (EC001900)
Electric engineering, automation, process control engineering / Electrical insulation and connecting material / Energy distribution system/ Busbar system for distribution boards (ecl@ss10.0.1-27-40-06-13 [ACC389011])
Height
160 mm
Width
405 mm
Depth
45 mm
Number of poles
3
Busbar distance
60 mm
Busbar height
0 mm
Busbar thickness
0 mm
Rated current
125 A
Short-circuit breaking capacity (I_{cw})
10 kA
Material
Copper
Surface protection
Bare

Dimensions



CAD data

- [Product-specific CAD data](#)
(Web)
- [3D Preview](#)
(Web)

DWG files

- [DA-CD-msfb_4_125a_crossboard405](#)
File
(Web)

edz files

- [DA-CE-ETN.MSFB-8-125A](#)
File
(Web)

Step files

- [DA-CS-msfb_4_125a_crossboard405](#)
File
(Web)

Additional product information

- [Motor starters and "Special Purpose Ratings" for the North American market \(PDF\)](#)
- [Busbar Component Adapters for modern Industrial control panels \(PDF\)](#)


3D drawing

- 
[1210DRV-557](#)
Line drawing

Dimensions single product

- 
[1210DIM-80](#)
Line drawing

Product photo

- 
[MSFB-8-125A_C](#)
Photo
Board, 8 outgoers
(Web)
- 
[MSFB-8-125A_L](#)
Photo
Board, 8 outgoers
(Web)
- 
[MSFB-8-125A_R](#)
Photo
Board, 8 outgoers
(Web)
- 
[1210PIC-416](#)
Photo

Instruction Leaflet

- [Board \(IL015080ZU\)](#)
Asset
(PDF, multilingual)

Declaration of Conformity

EU

- [Motor Starter Feeder System \(DA-DC-00003917\)](#)
Asset
(PDF)

Download-Center

- [Download-Center \(this item\)](#)
Eaton EMEA Download-Center - download data for this item
- [Download-Center](#)



[Generate data sheet in PDF format](#)



[Generate data sheet in Excel format](#)



[Write a comment](#)

[Imprint](#) [Privacy Policy](#) [Legal Disclaimer](#) [Terms and Conditions](#)

© 2021 by Eaton Industries GmbH

