



AS-Interface module, 2I, 1O, spring clamp connection



Powering Business Worldwide™

Part no. M22-ASI-C
Article no. 231271
Catalog No. M22-ASI-CQ

Delivery program

Product range			RMQ-Titan (drilling dimensions 22.5 mm)
Basic function			Accessories
Accessories			AS-Interface
Basic function accessories			AS-Interface connection
Single unit/Complete unit			Single unit
Fixing			Base fixing for RMQ-Titan
			Adapter element for RMQ-Titan AS-Interface information: 2 input bits, 1 output bit – Inputs for 2 contacts – Output for 1 LED element: M22-LED-...
Front ring			Bezel: titanium
Connection to SmartWire-DT			no

Technical data

General

Standards			IEC/EN 60947, DIN EN 50 295
Radio interference suppression			EN 55011, EN 55022
Degree of Protection			IP00
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +55
Mechanical shock resistance		g	> 30 Shock duration 11 ms
Fixing			Base fixing for RMQ-Titan
Mounting position			As required

Power supply

Rated voltage to AS-Interface Specification		V DC	26.5 - 31.6
Connection of the AS interface line			2 cables on board
Power supply			Completely from the AS-Interface cable
Addressing			Via connection to AS-Interface cable
Max. total current		mA	\leq 40
AS-Interface			Protected against polarity reversal
Rated operational current when idle (no I, O set)		mA	30
Status LEDs			POWER AS-Interface cable: green LED on the board ERROR AS-Interface, AS-Interface Master failure: red LED on the board

Inputs

Inputs, protected against short-circuit		Number	2 (normally 22 V/5 mA)
Length of connecting cables		cm	200

Outputs

Outputs, protected against short-circuit		Number	1 (normally 19 V/8 mA)
Voltage range		V DC	24 V DC (+10/-15%)
Length of connecting cables		cm	200
Profile			S-3.A.E
Specification			2.1
Addresses		Number	62

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	0

Heat dissipation per pole, current-dependent	P _{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	1.3
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Adapter for control circuit devices (EC001020)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Adapter for command devices (ecl@ss8.1-27-37-12-26 [AKF044011])			
Built-in diameter		mm	0
Number of appliances to build in			0

Approvals

Product Standards			IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.			E29184
UL Category Control No.			NKCR
CSA File No.			012528
CSA Class No.			3211-03
North America Certification			UL listed, CSA certified

Dimensions

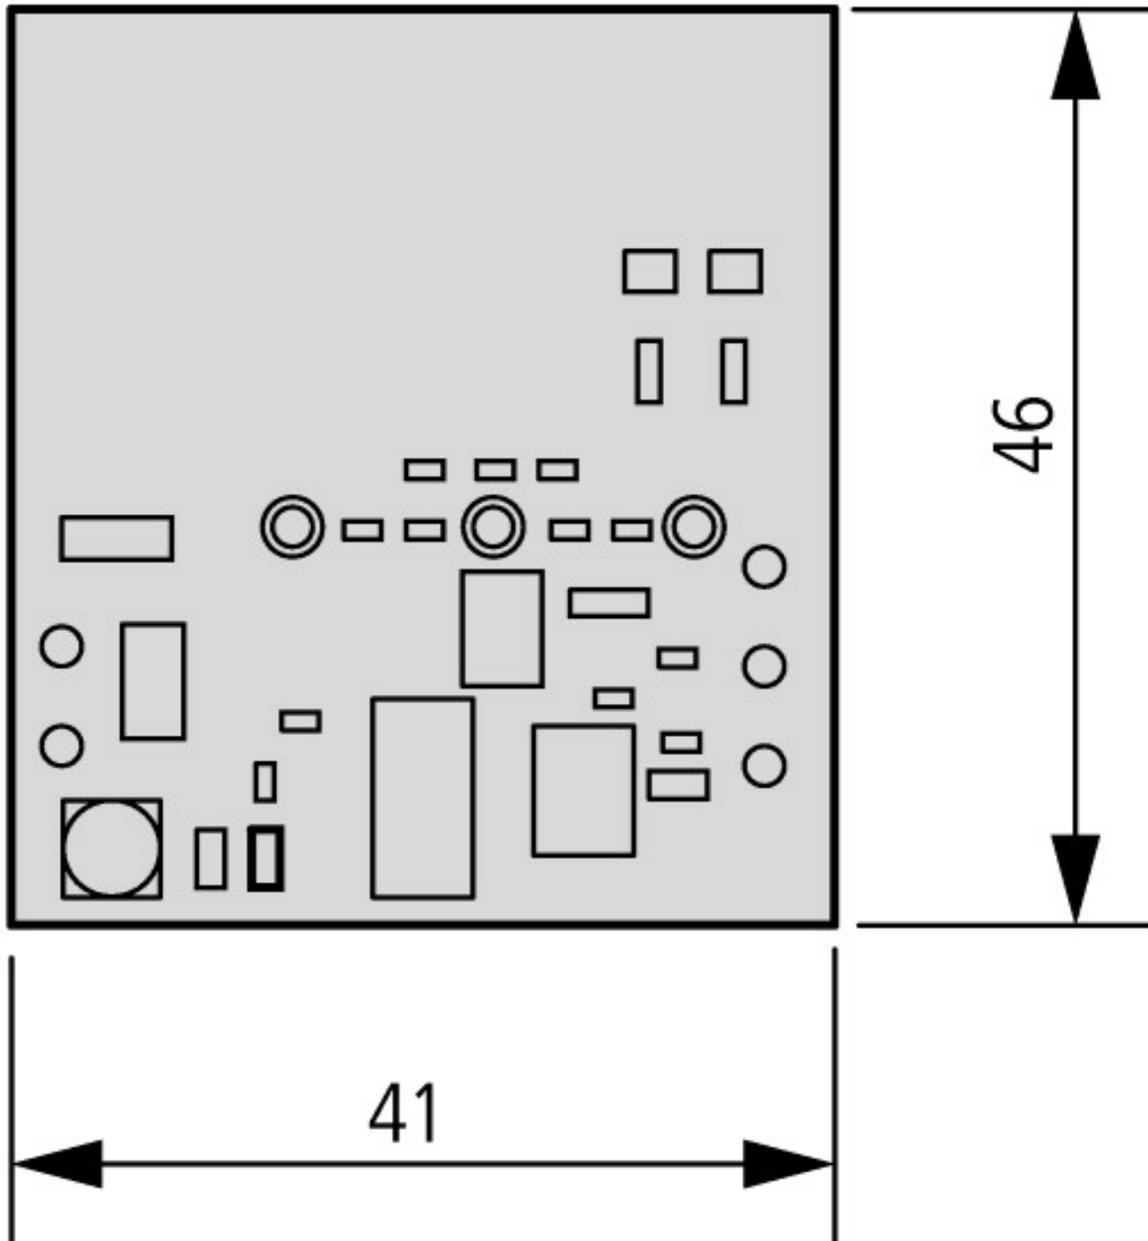

Additional product information (links)

IL04716018Z (AWA1160-1541) AS Interface connection for RMQ

IL04716018Z (AWA1160-1541) AS Interface connection for RMQ

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716018Z2015_02.pdf