



**Miniature circuit breaker (MCB), 1, 6A, 1p, Z-Char, AC**

**Part no.** FAZ-Z1,6/1  
**Catalog No.** 278619  
**Eaton Catalog No.** FAZ-Z1,6/1  
**EL-Nummer** 0001695247  
**(Norway)**

Similar to illustration

## Technical data

### Electrical

|   |                 |         |                                |
|---|-----------------|---------|--------------------------------|
| Standards                                       |                 |         | IEC/EN 60947-2<br>IEC/EN 60898 |
| Rated operational voltage                       | U <sub>e</sub>  | V       |                                |
|   | U <sub>e</sub>  | V AC    | 240/415                        |
|   |                 | V DC    | 60 (per pole)                  |
| Rated switching capacity acc. to IEC/EN 60947-2 | I <sub>cu</sub> | kA      | 10                             |
| Operational switching capacity                  |                 | kA      | 7.5                            |
| Characteristic                                  |                 |         | B, C, D, K, S, Z               |
| Max. back-up fuse                               |                 | A gL/gG | 125                            |
| Selectivity Class                               |                 |         | 3                              |
| lifespan  |                 |         |                                |
| Lifespan  | Operations      |         | > 10000                        |
| Direction of incoming supply                    |                 |         | as required                    |

### Mechanical

|                              |  |                 |   |
|------------------------------|--|-----------------|---|
| Standard front dimension     |  | mm              | 45                                      |
| Enclosure height             |  | mm              | 80                                      |
| Mounting width per pole      |  | mm              | 17.5                                    |
| Mounting                     |  |                 | IEC/EN 60715 top-hat rail               |
| Degree of Protection         |  |                 | IP20, IP40 (when fitted)                |
| Terminals top and bottom     |  |                 | Twin-purpose terminals                  |
| Terminal protection          |  |                 | Finger and back-of-hand proof to BGV A2 |
| Terminal capacities          |  | mm <sup>2</sup> |   |
|                              |  | mm <sup>2</sup> | 1 x 25                                  |
|                              |  | mm <sup>2</sup> | 2 x 10                                  |
| Thickness of busbar material |  | mm              | 0.8 ... 2                               |
| Mounting position            |  |                 | As required                             |

## Design verification as per IEC/EN 61439

|  |                   |    |   |
|--|-------------------|----|---|
| Technical data for design verification                   |                   |    |   |
| Rated operational current for specified heat dissipation | I <sub>n</sub>    | A  | 1.6   |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub>  | W  | 0   |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub>  | W  | 2.6   |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>   | W  | 0   |
| Heat dissipation capacity                                | P <sub>diss</sub> | W  | 0   |
| Operating ambient temperature min.                       |                   | °C | -40   |
| Operating ambient temperature max.                       |                   | °C | 75  |
|  |                   |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |
| IEC/EN 61439 design verification                         |                   |    |   |
| 10.2 Strength of materials and parts                     |                   |    |   |
| 10.2.2 Corrosion resistance                              |                   |    | Meets the product standard's requirements.                                  |

|  |  |  |
|--|--|--|
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ecI@ss10.0.1-27-14-19-01 [AAB905014])


|  |                 |          |
|--|-----------------|----------|
| Release characteristic   |                 | Z        |
| Number of poles (total)  |                 | 1        |
| Number of protected poles                                      |                 | 1        |
| Rated current  | A               | 1.6      |
| Rated voltage  | V               | 230      |
| Rated insulation voltage Ui                                    | V               | 440      |
| Rated impulse withstand voltage Uimp                           | kV              | 4        |
| Rated short-circuit breaking capacity Icn EN 60898 at 230 V    | kA              | 0        |
| Rated short-circuit breaking capacity Icn EN 60898 at 400 V    | kA              | 0        |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V | kA              | 10       |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V | kA              | 10       |
| Voltage type   |                 | AC       |
| Frequency  | Hz              | 50 - 60  |
| Current limiting class   |                 | 3        |
| Suitable for flush-mounted installation                        |                 | No       |
| Concurrently switching N-neutral                               |                 | No       |
| Over voltage category  |                 | 3        |
| Pollution degree   |                 | 2        |
| Additional equipment possible                                  |                 | Yes      |
| Width in number of modular spacings                            |                 | 1        |
| Built-in depth   | mm              | 70.5     |
| Degree of protection (IP)                                      |                 | IP20     |
| Ambient temperature during operating                           | °C              | -25 - 75 |
| Connectable conductor cross section multi-wired                | mm <sup>2</sup> | 1 - 25   |
| Connectable conductor cross section solid-core                 | mm <sup>2</sup> | 1 - 25   |


Approvals

|                                  |  |
|----------------------------------|--|
| Product Standards                | IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking |
| UL File No.                      | E177451  |
| UL Category Control No.          | QVNU2, QVNU8   |
| CSA File No.                     | 204453   |
| CSA Class No.                    | 3215-30  |
| North America Certification      | UL recognized, CSA certified   |
| Conditions of Acceptability      | Supplementary Protector only   |
| Suitable for                     | Branch Circuits; not as BCPD   |
| Current Limiting Circuit-Breaker | No   |
| Max. Voltage Rating              | 277 VAC; 48 VDC  |
| Degree of Protection             | IEC: IP20; UL/CSA Type: -  |


Characteristics

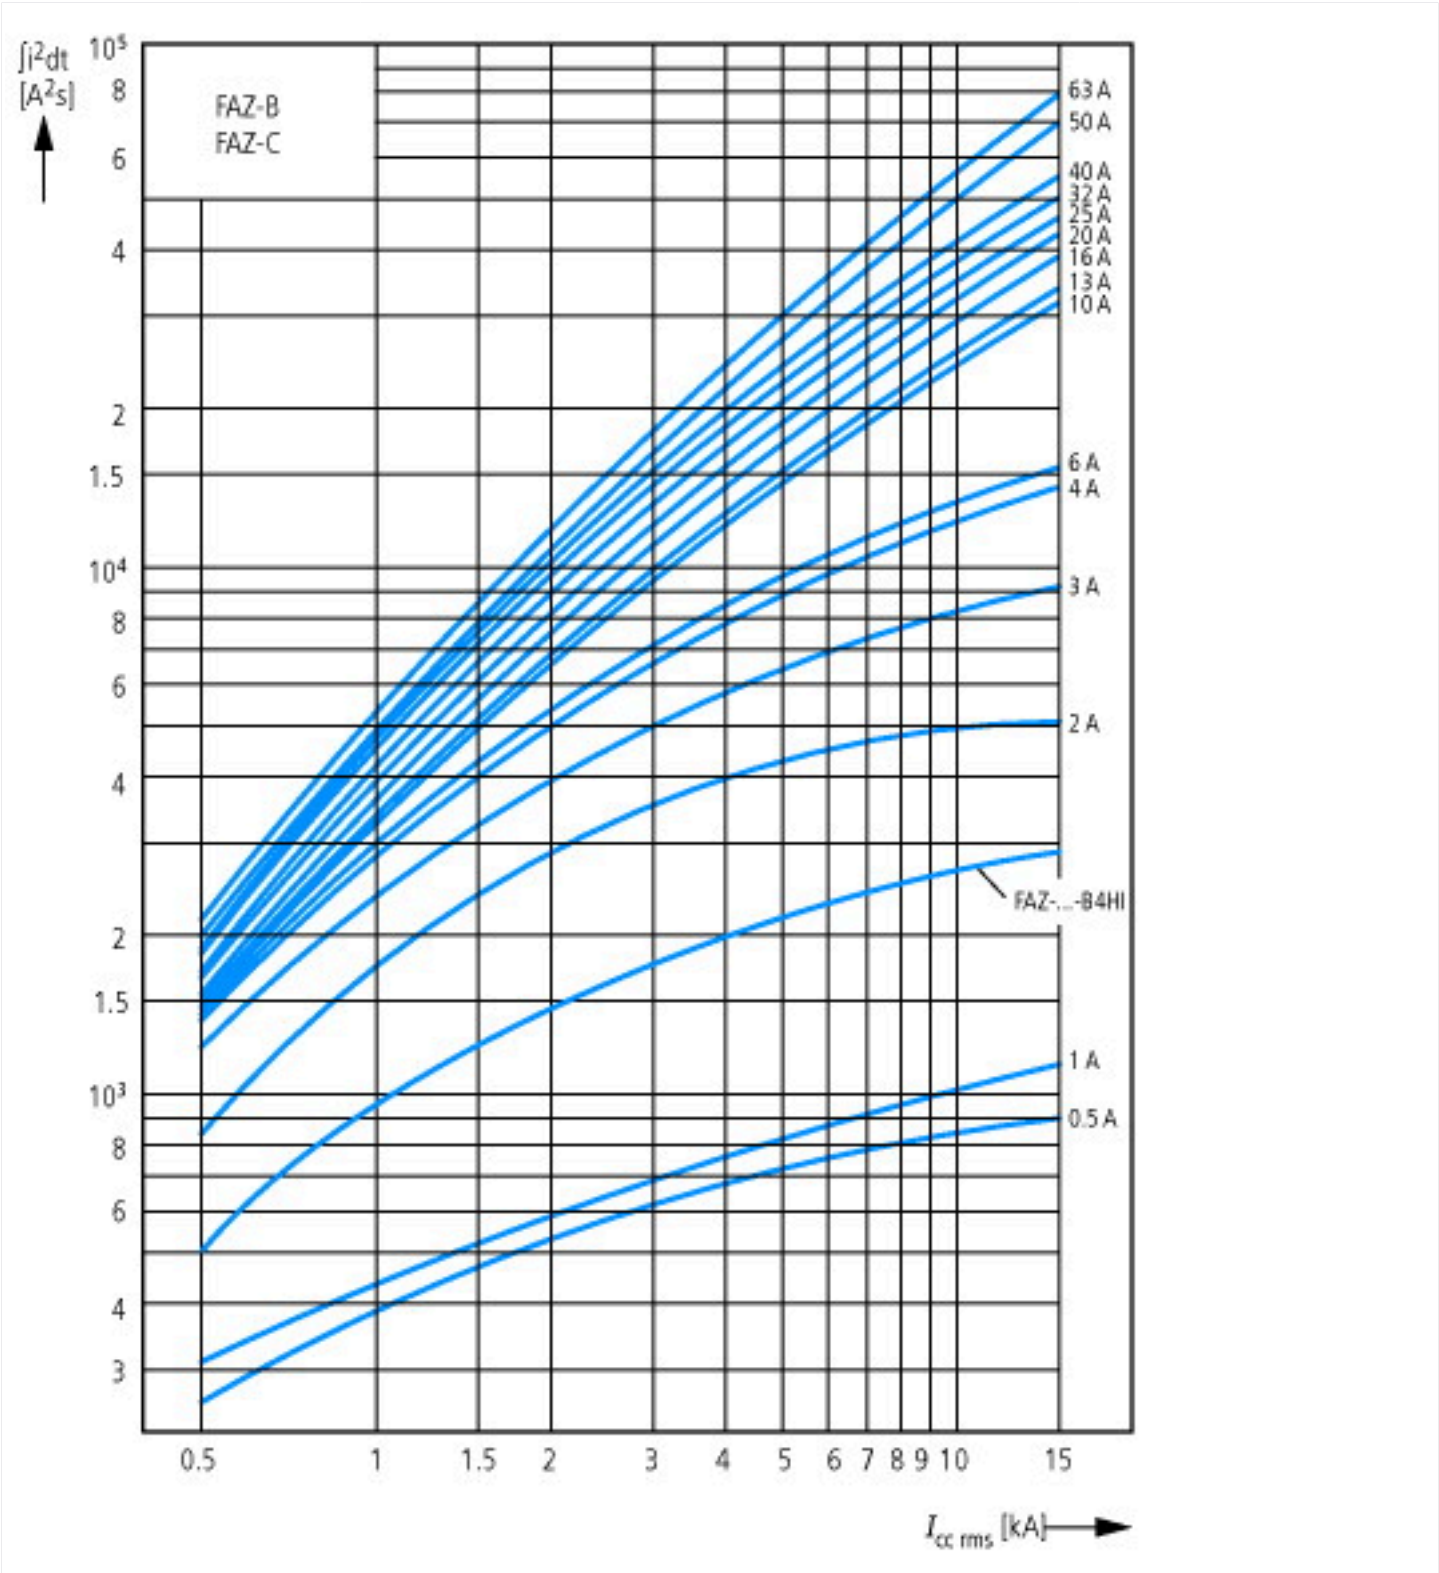

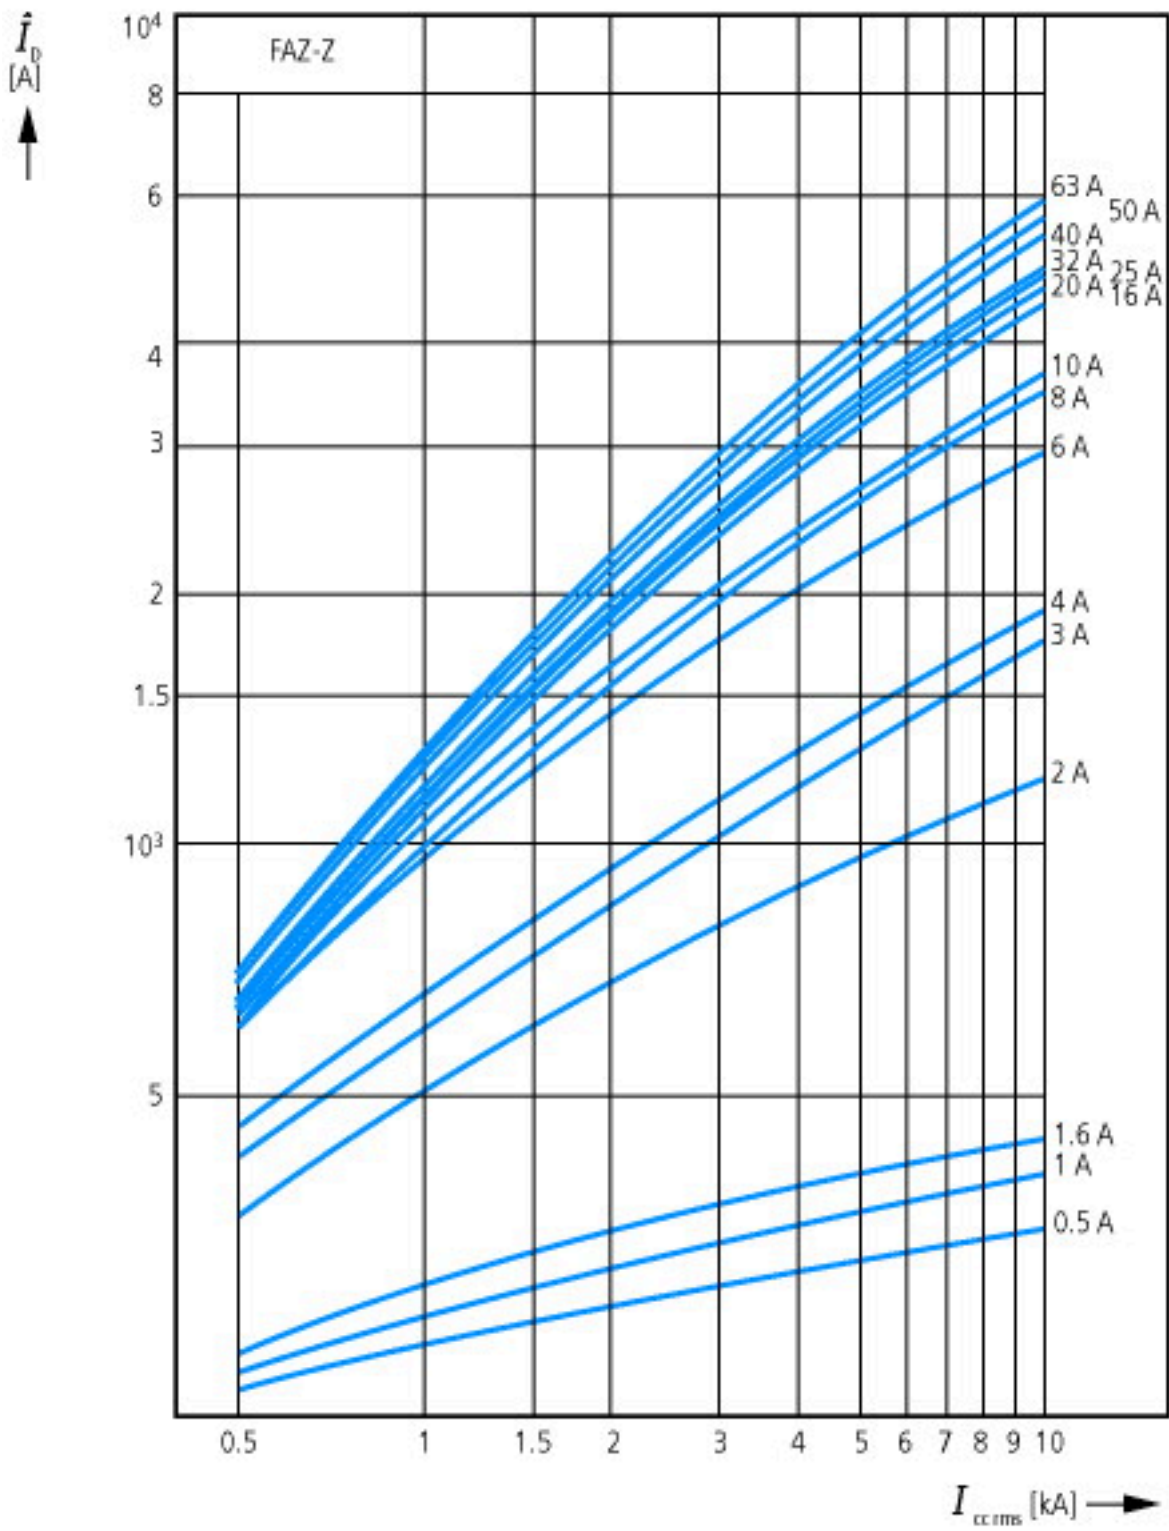


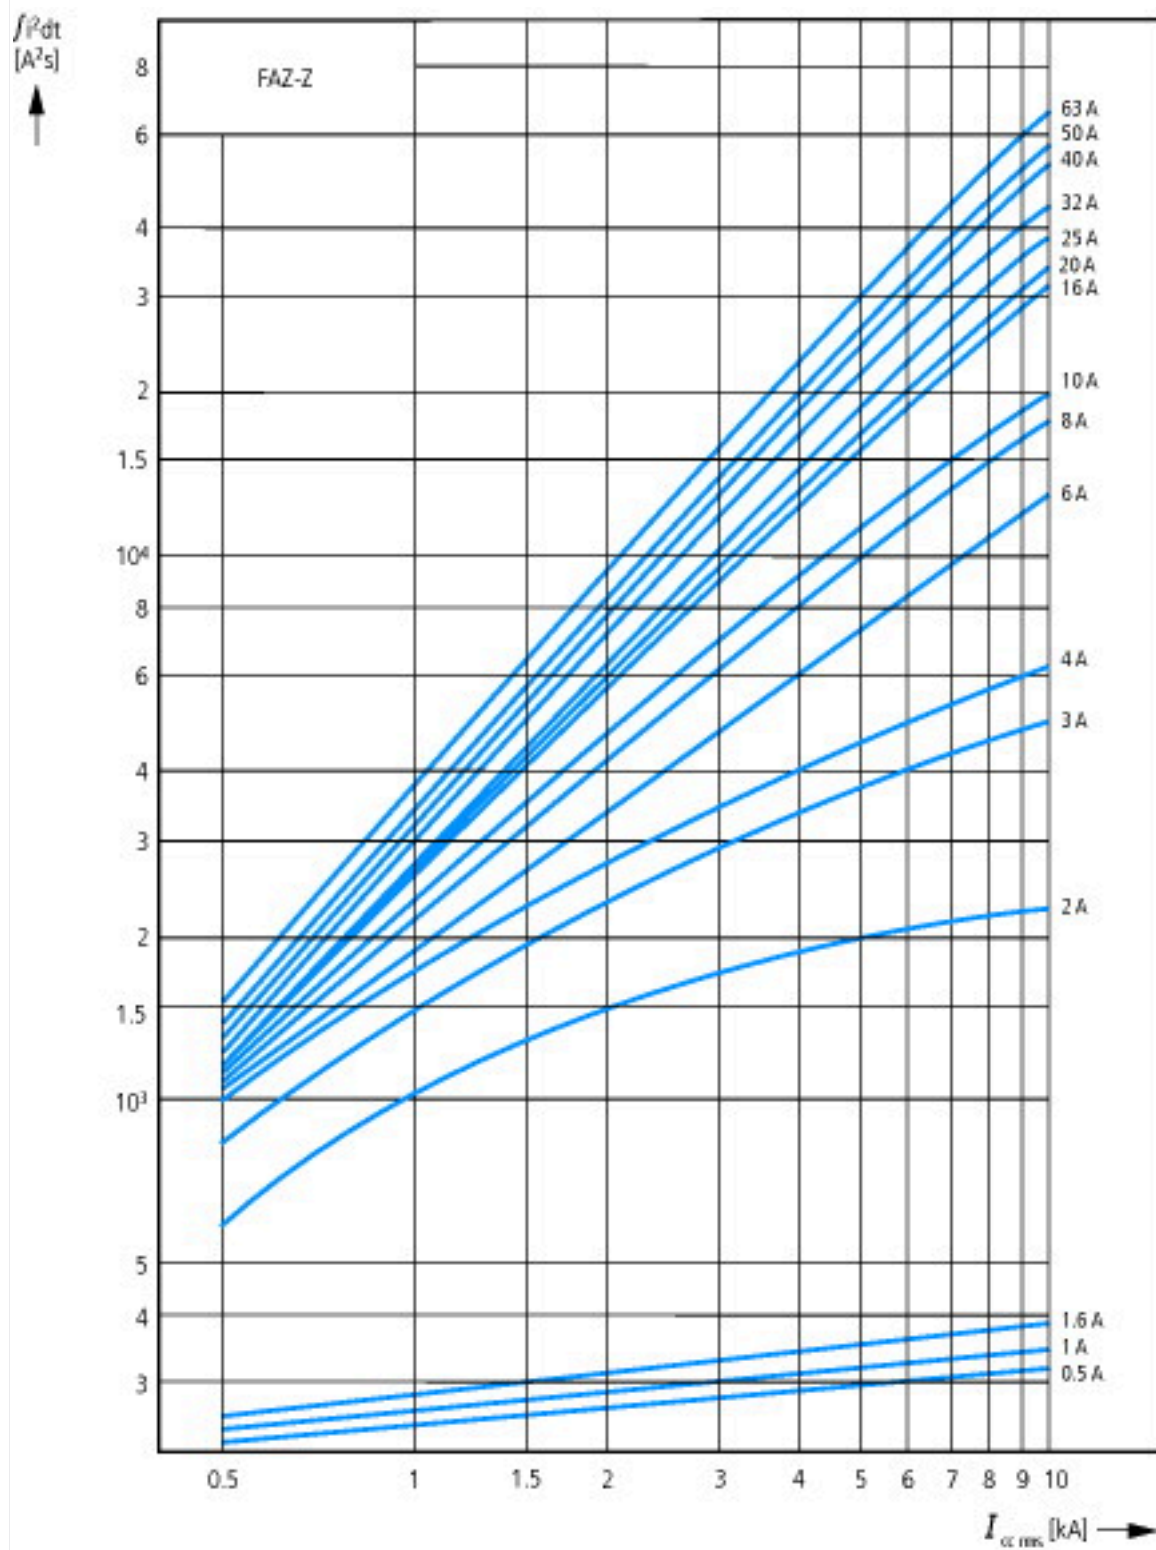

Let-through current  $i_p$   
According to IEC/EN 60898

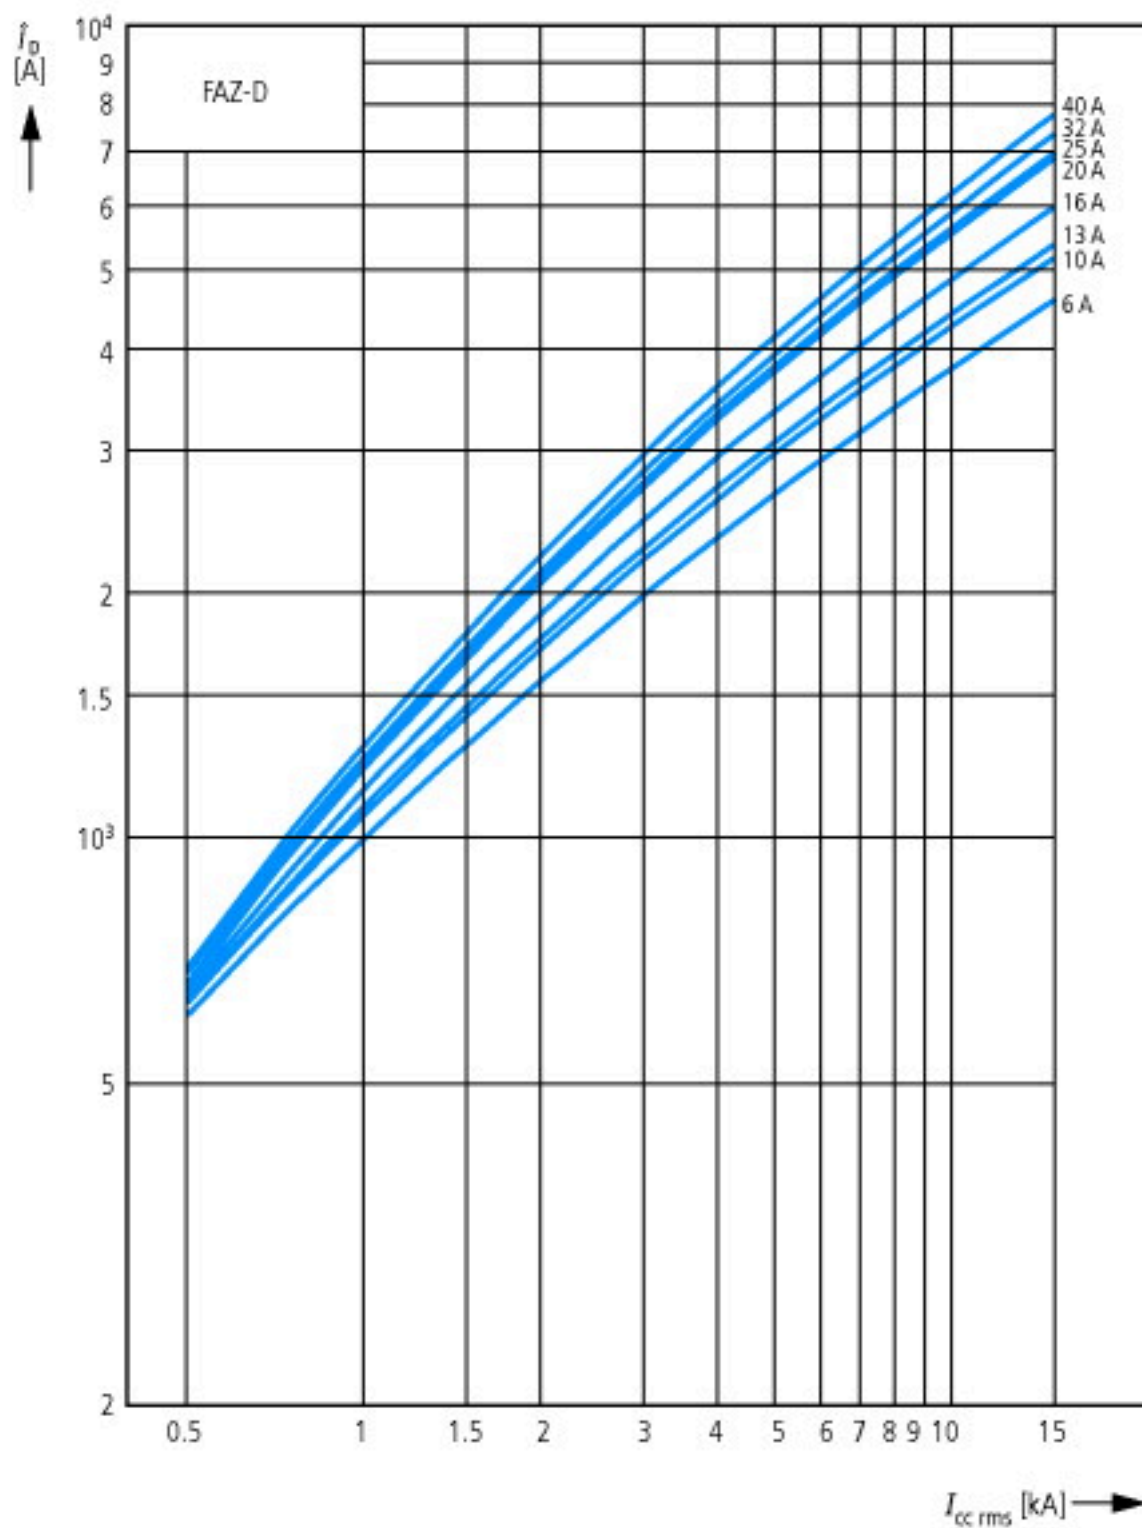



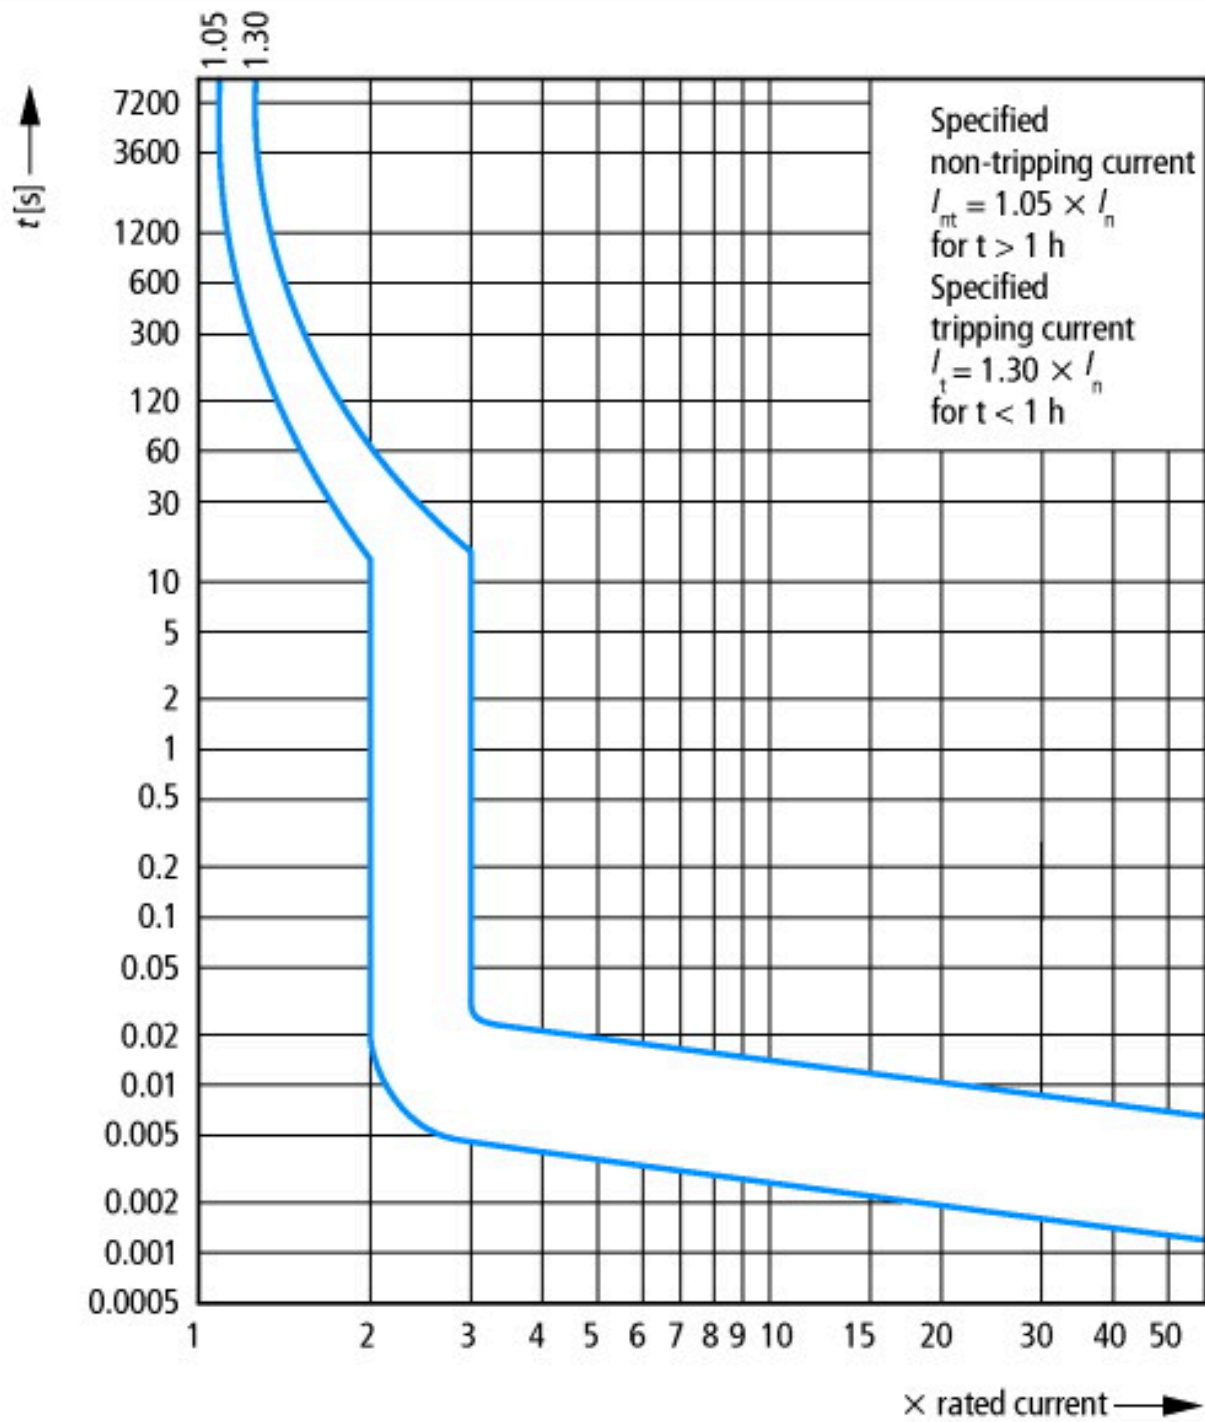

Tripping characteristic at 30 °C:  
 Z according to IEC/EN 60947

## Dimensions

