



## Miniature circuit breaker (MCB), 6A, 3p, K-Char, AC

**Part no.** FAZ-K6/3  
**Catalog No.** 278907  
**Eaton Catalog No.** FAZ-K6/3  
**EL-Nummer** 0001695341  
**(Norway)**

Similar to illustration

## Technical data

### Electrical

|                                                 |            |         |                                |
|-------------------------------------------------|------------|---------|--------------------------------|
| Standards                                       |            |         | IEC/EN 60947-2<br>IEC/EN 60898 |
| Rated operational voltage                       | $U_e$      | V       |                                |
|                                                 | $U_e$      | V AC    | 240/415                        |
|                                                 |            | V DC    | 60 (per pole)                  |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$   | kA      | 10                             |
| Operational switching capacity                  |            | kA      | 7.5                            |
| Characteristic                                  |            |         | B, C, D, K, S, Z               |
| Max. back-up fuse                               |            | A gL/gG | 125                            |
| Selectivity Class                               |            |         | 3                              |
| lifespan                                        |            |         |                                |
| Lifespan                                        | Operations |         | > 10000                        |
| Direction of incoming supply                    |            |         | as required                    |

### Mechanical

|                              |  |                 |                                         |
|------------------------------|--|-----------------|-----------------------------------------|
| Standard front dimension     |  | mm              | 45                                      |
| Enclosure height             |  | mm              | 80                                      |
| Mounting width per pole      |  | mm              | 17.5                                    |
| Mounting                     |  |                 | IEC/EN 60715 top-hat rail               |
| Degree of Protection         |  |                 | IP20, IP40 (when fitted)                |
| Terminals top and bottom     |  |                 | Twin-purpose terminals                  |
| Terminal protection          |  |                 | Finger and back-of-hand proof to BGV A2 |
| Terminal capacities          |  | mm <sup>2</sup> |                                         |
|                              |  | mm <sup>2</sup> | 1 x 25                                  |
|                              |  | mm <sup>2</sup> | 2 x 10                                  |
|                              |  |                 |                                         |
| Thickness of busbar material |  | mm              | 0.8 ... 2                               |
| Mounting position            |  |                 | As required                             |

## Design verification as per IEC/EN 61439

|                                                          |            |    |                                                                             |
|----------------------------------------------------------|------------|----|-----------------------------------------------------------------------------|
| Technical data for design verification                   |            |    |                                                                             |
| Rated operational current for specified heat dissipation | $I_n$      | A  | 6                                                                           |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W  | 0                                                                           |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W  | 6.9                                                                         |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W  | 0                                                                           |
| Heat dissipation capacity                                | $P_{diss}$ | W  | 0                                                                           |
| Operating ambient temperature min.                       |            | °C | -40                                                                         |
| Operating ambient temperature max.                       |            | °C | 75                                                                          |
|                                                          |            |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |

## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)

Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ec1@ss10.0.1-27-14-19-01 [AAB905014])

Release characteristic


K

|                                                                |                 |          |
|----------------------------------------------------------------|-----------------|----------|
| Number of poles (total)                                        |                 | 3        |
| Number of protected poles                                      |                 | 3        |
| Rated current                                                  | A               | 6        |
| Rated voltage                                                  | V               | 400      |
| Rated insulation voltage Ui                                    | V               | 440      |
| Rated impulse withstand voltage Uimp                           | kV              | 4        |
| Rated short-circuit breaking capacity Icn EN 60898 at 230 V    | kA              | 0        |
| Rated short-circuit breaking capacity Icn EN 60898 at 400 V    | kA              | 0        |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V | kA              | 10       |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V | kA              | 10       |
| Voltage type                                                   |                 | AC       |
| Frequency                                                      | Hz              | 50 - 60  |
| Current limiting class                                         |                 | 3        |
| Suitable for flush-mounted installation                        |                 | No       |
| Concurrently switching N-neutral                               |                 | No       |
| Over voltage category                                          |                 | 3        |
| Pollution degree                                               |                 | 2        |
| Additional equipment possible                                  |                 | Yes      |
| Width in number of modular spacings                            |                 | 3        |
| Built-in depth                                                 | mm              | 70.5     |
| Degree of protection (IP)                                      |                 | IP20     |
| Ambient temperature during operating                           | °C              | -25 - 75 |
| Connectable conductor cross section multi-wired                | mm <sup>2</sup> | 1 - 25   |
| Connectable conductor cross section solid-core                 | mm <sup>2</sup> | 1 - 25   |


## Approvals


|                                  |  |                                                                      |
|----------------------------------|--|----------------------------------------------------------------------|
| Product Standards                |  | IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking |
| UL File No.                      |  | E177451                                                              |
| UL Category Control No.          |  | QVNU2, QVNU8                                                         |
| CSA File No.                     |  | 204453                                                               |
| CSA Class No.                    |  | 3215-30                                                              |
| North America Certification      |  | UL recognized, CSA certified                                         |
| Conditions of Acceptability      |  | Supplementary Protector only                                         |
| Suitable for                     |  | Branch Circuits; not as BCPD                                         |
| Current Limiting Circuit-Breaker |  | No                                                                   |
| Max. Voltage Rating              |  | 480Y/277 VAC                                                         |
| Degree of Protection             |  | IEC: IP20; UL/CSA Type: -                                            |


Characteristics

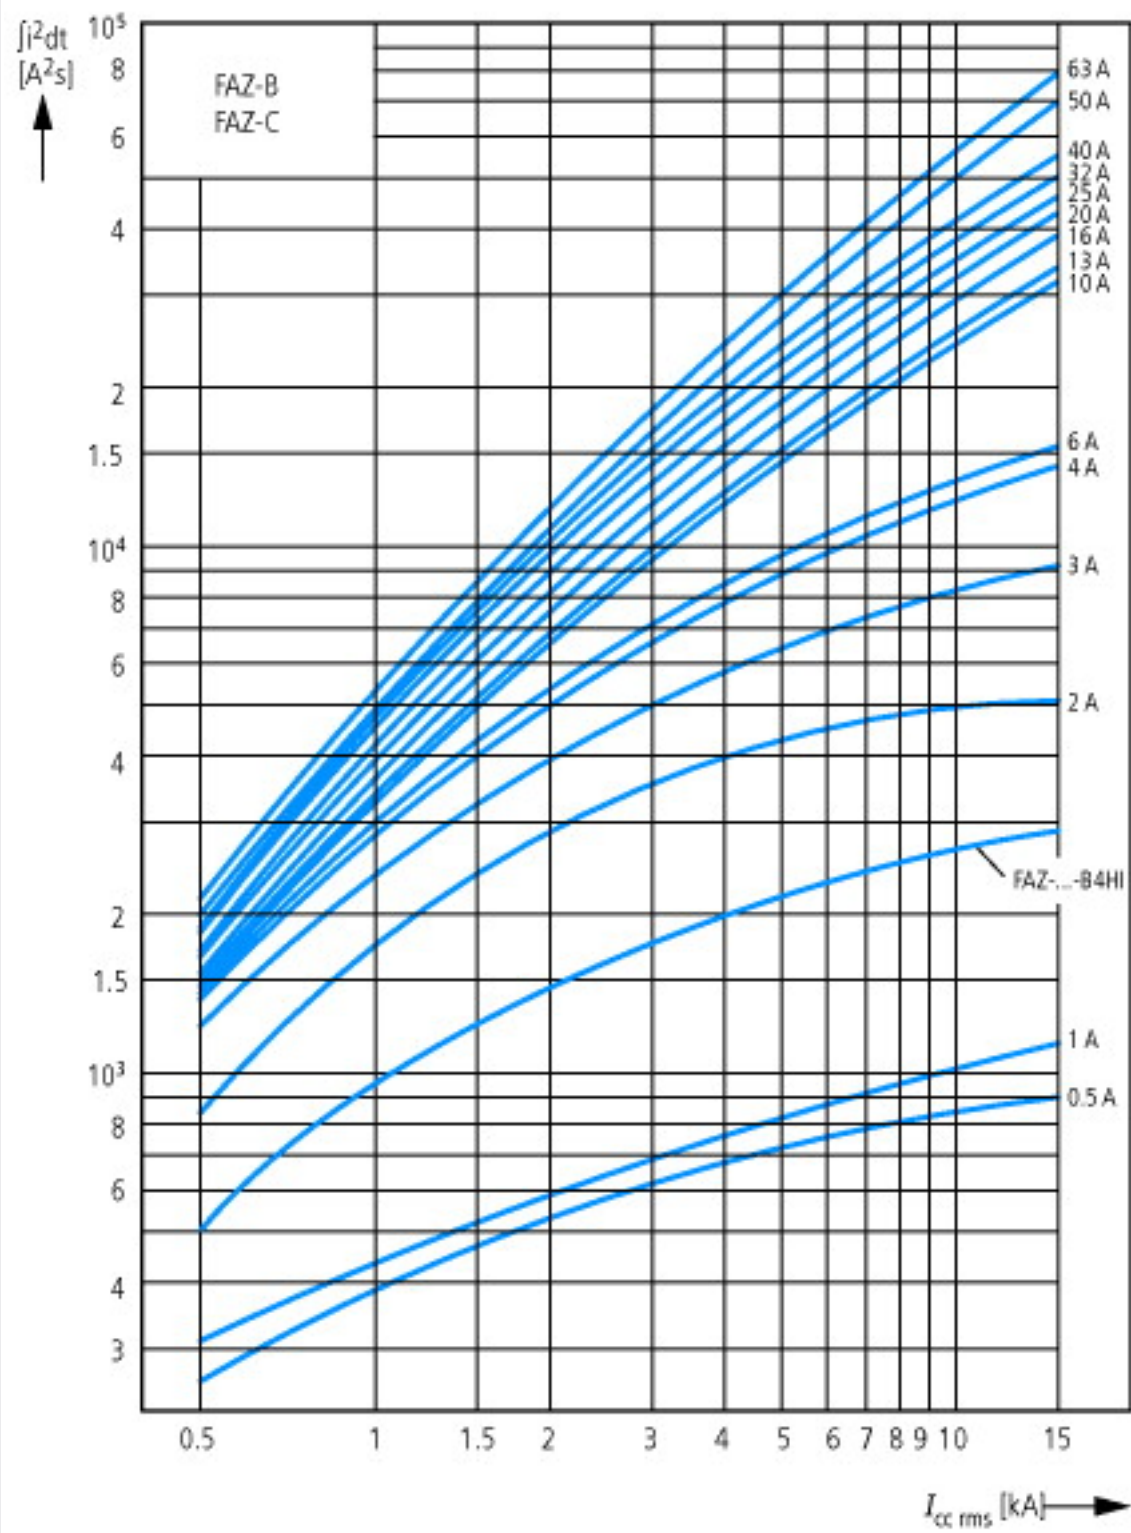


Let-through energy  $i^2t$   
According to IEC/EN 60898

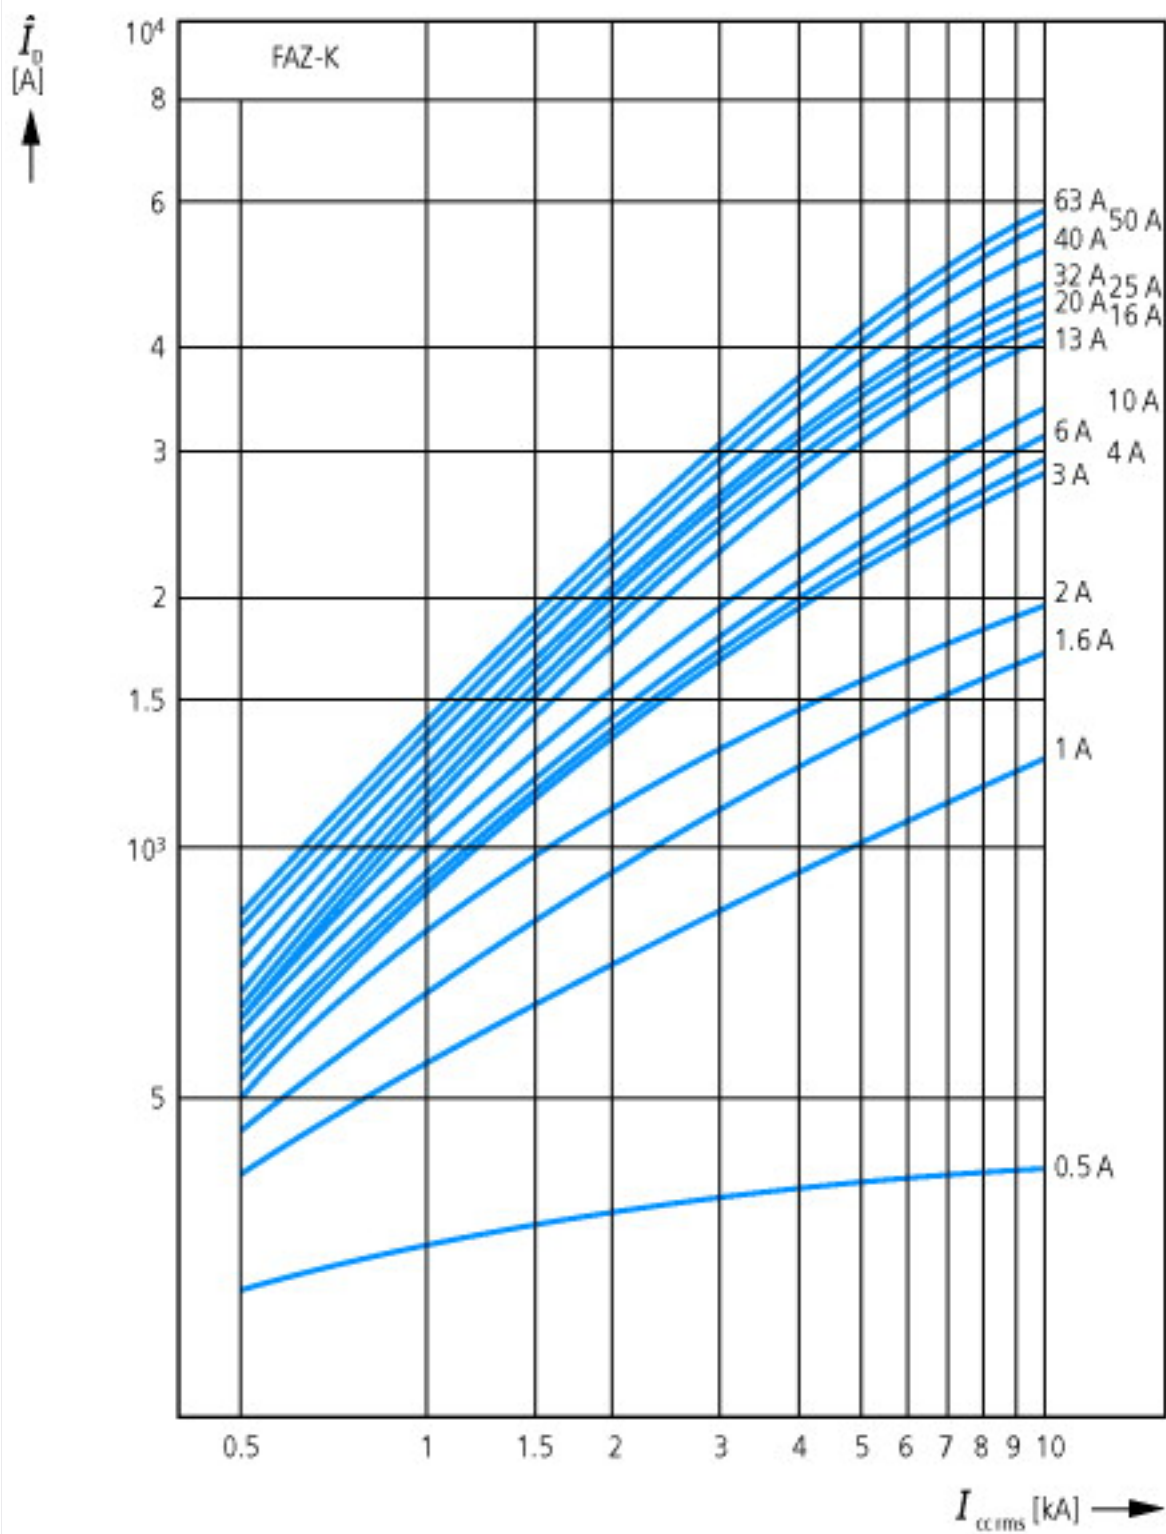

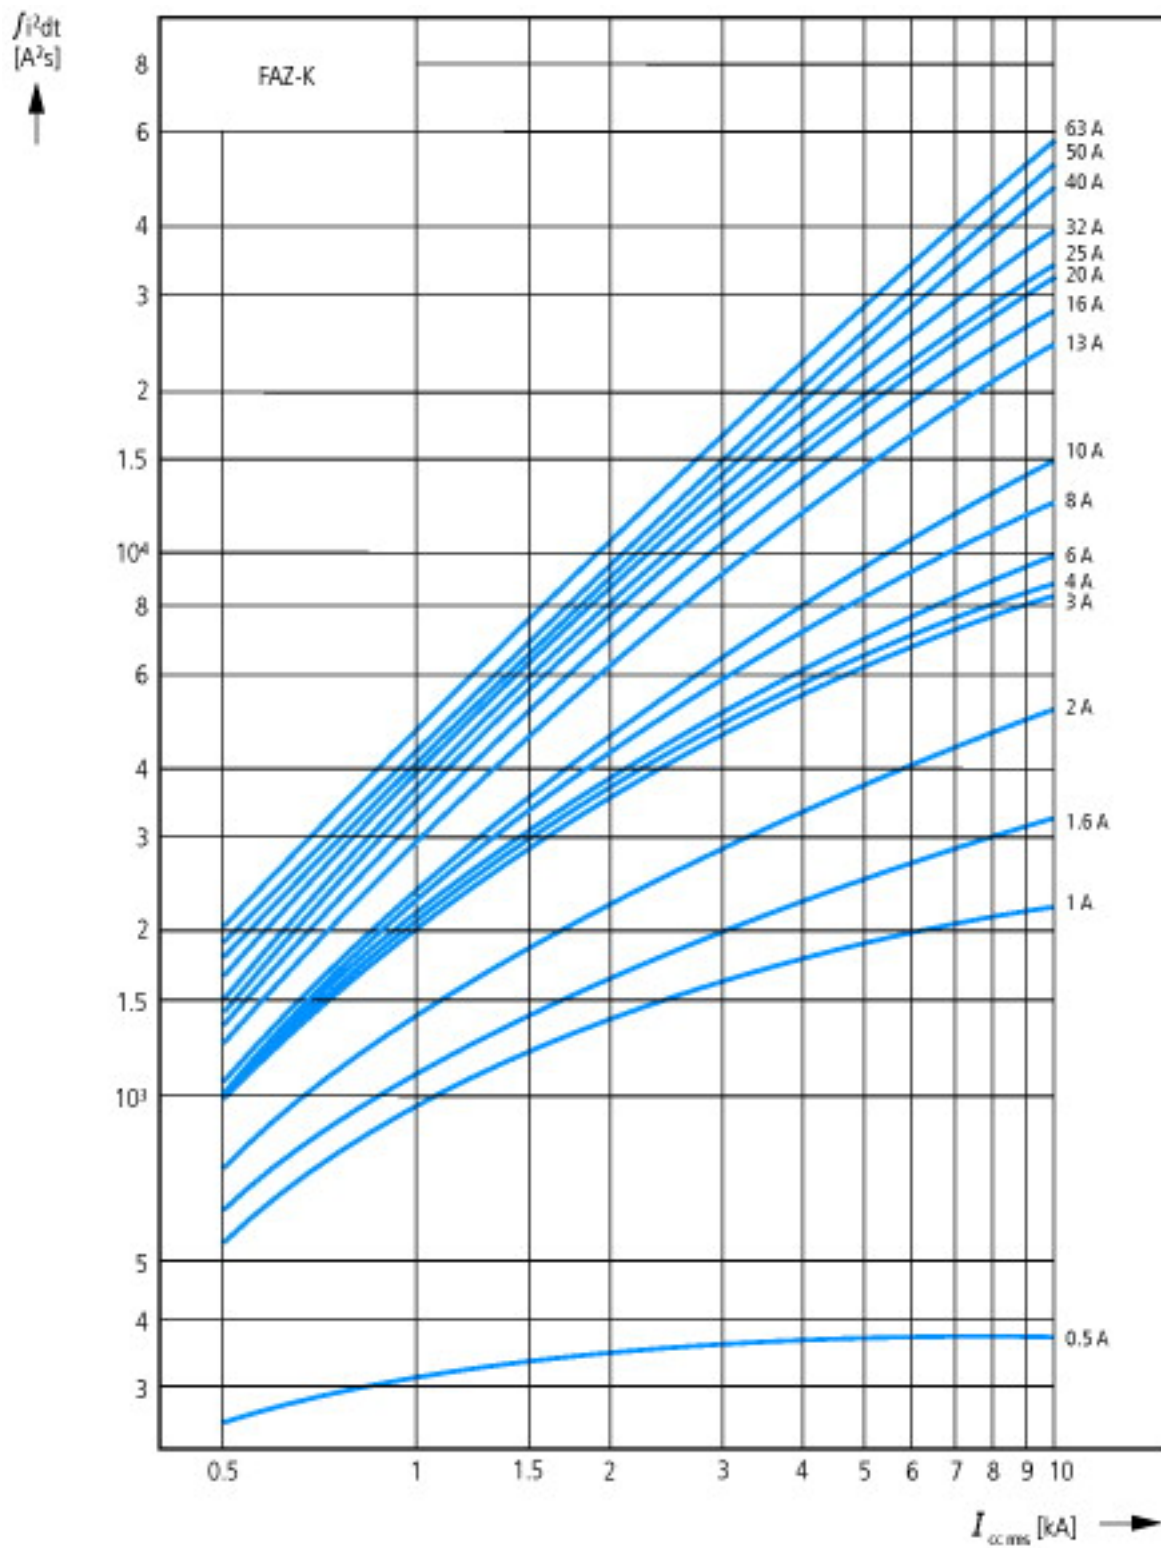

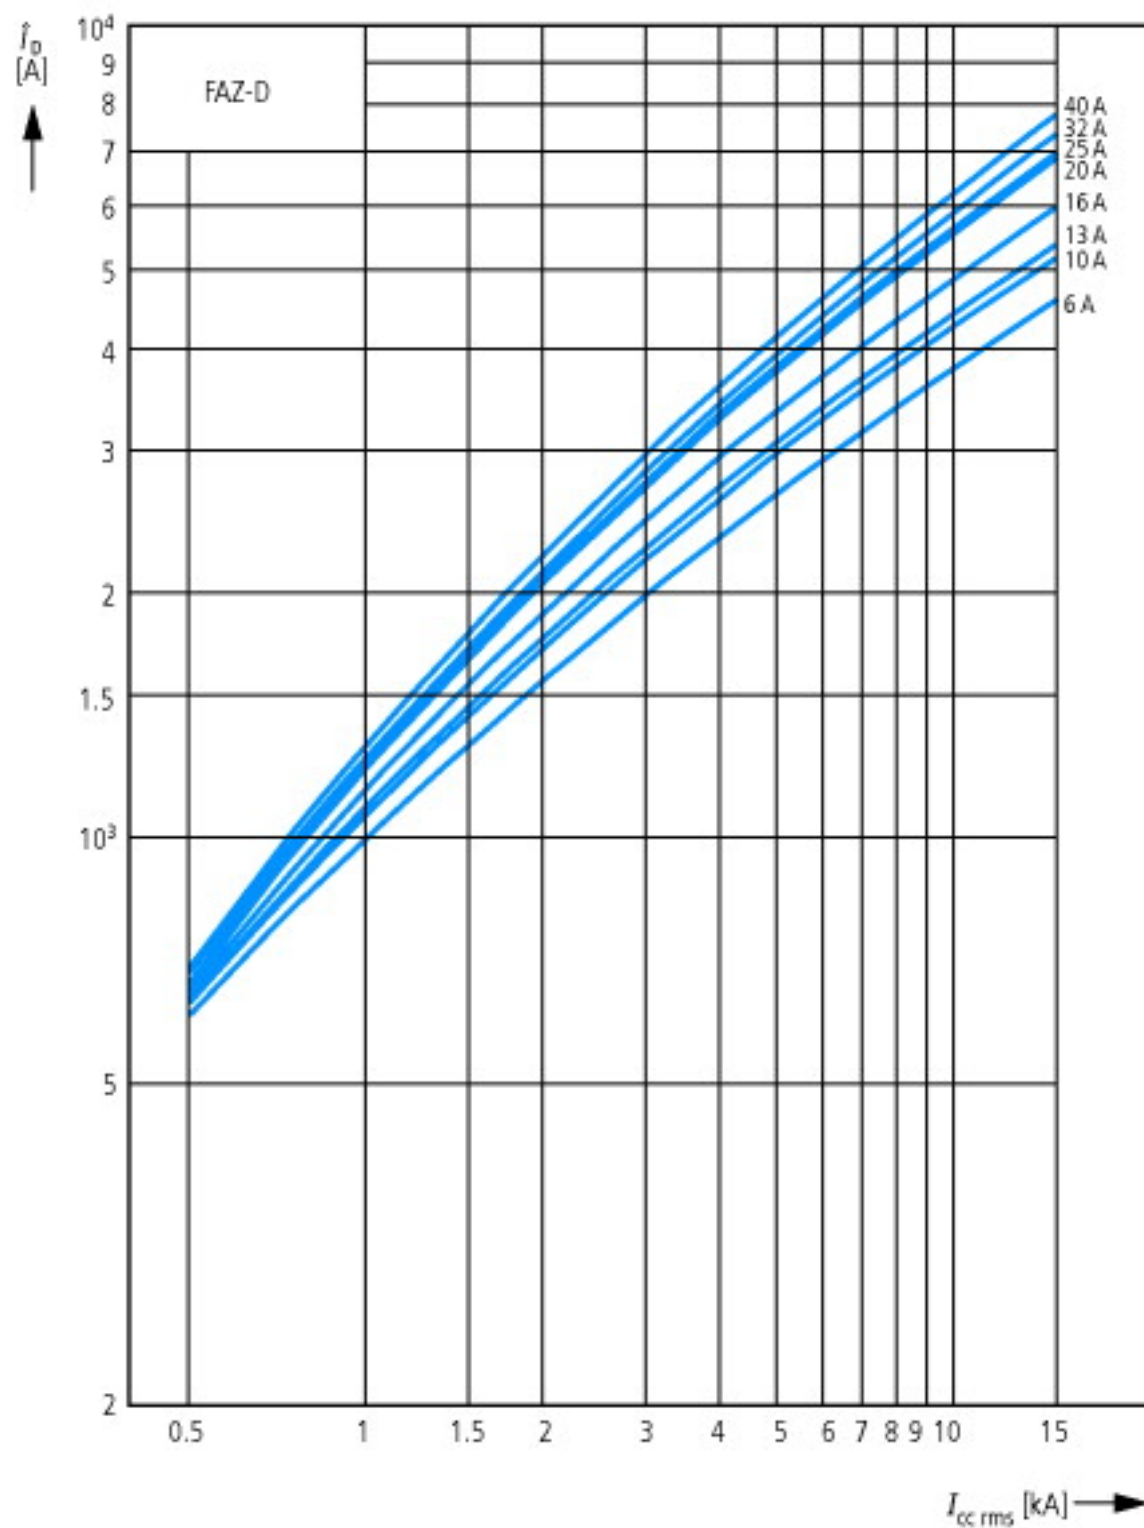

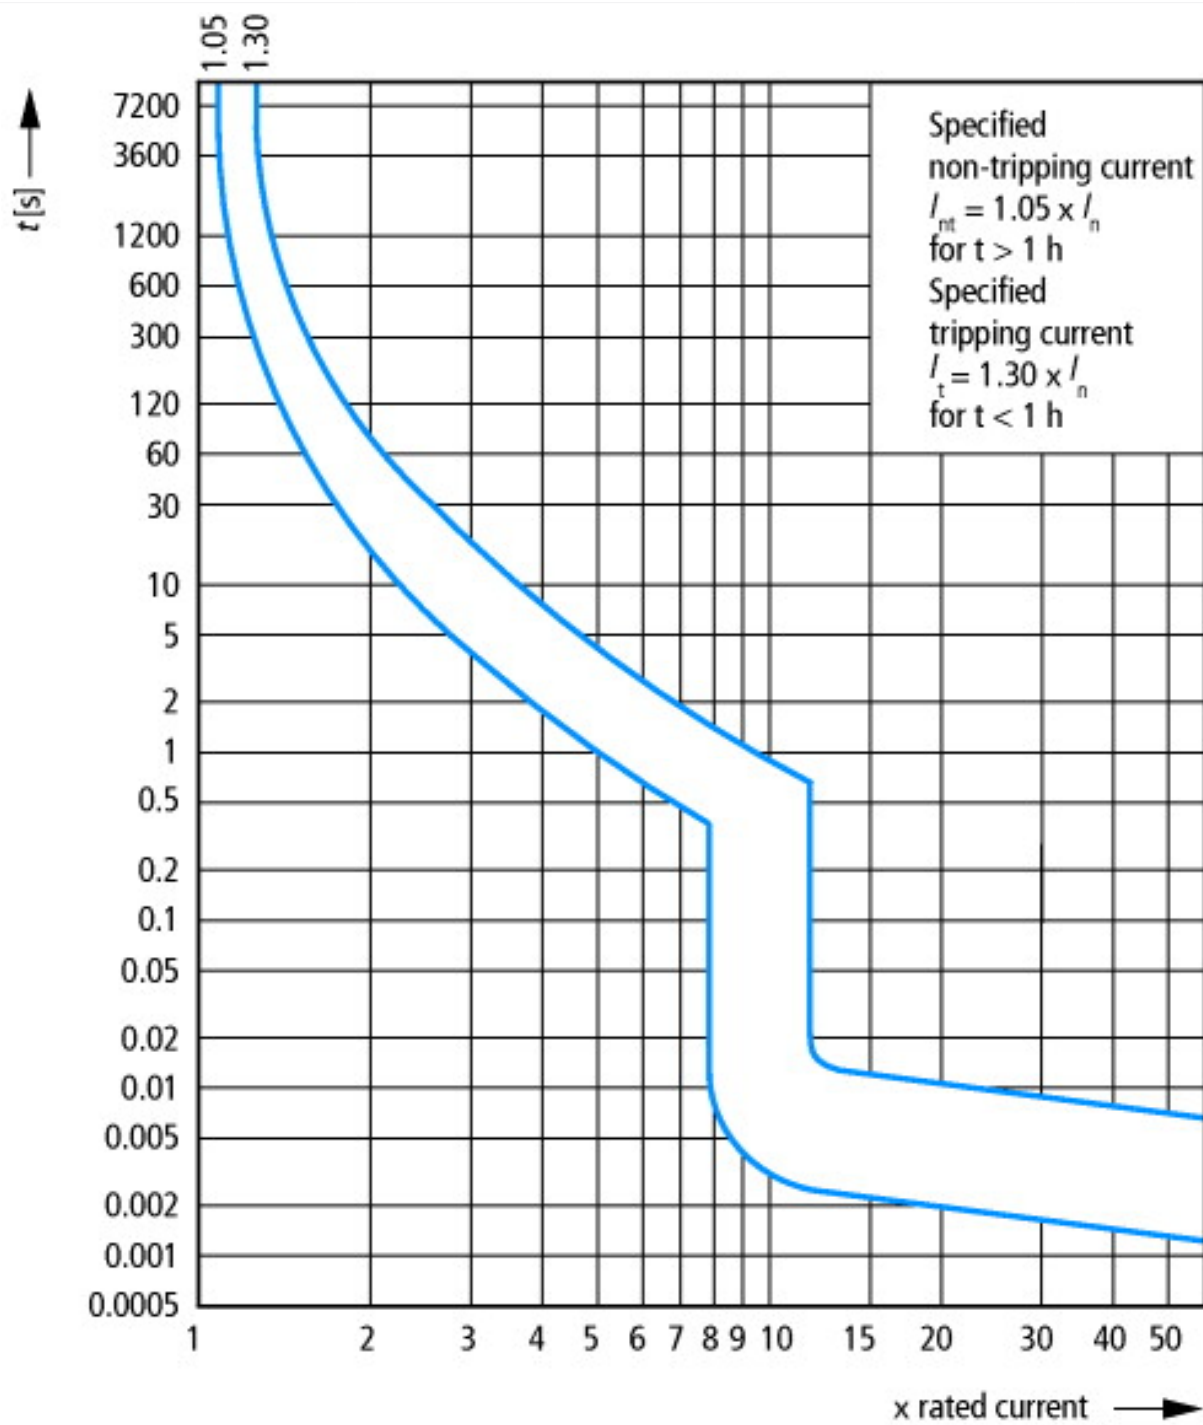

Tripping characteristic at 30 °C:  
 K according to IEC/EN 60947

## Dimensions

