






Switch-disconnector, 3 pole, 400 A, With red rotary handle and yellow locking ring, rear mounting, with 400 mm metal shaft

Part no. DMV-400/3/M4/P-R
Catalog No. 6094967

EL-Nummer 1417204
(Norway)

Delivery program

Product range			Switch-disconnector Main switch maintenance switch												
Part group reference			DMV												
Stop Function			Emergency switching off function												
Information about equipment supplied			With red rotary handle and yellow locking ring												
Notes			auxiliary contact fitted by user.												
Number of poles			With metal shaft for a control panel depth of 400 mm												
			3 pole												
Auxiliary contacts															
		N/O	0												
		N/C	0												
Notes			1 padlock, # 5 mm												
Locking facility			Lockable in the 0 (Off) position												
Degree of Protection			Front IP65												
Design			rear mounting												
															
Contact sequence			 <table border="1"> <tr> <td></td><td>T1</td><td>T2</td><td>T3</td></tr> <tr> <td>1</td><td>X</td><td>X</td><td>X</td></tr> <tr> <td>0</td><td></td><td></td><td></td></tr> </table>		T1	T2	T3	1	X	X	X	0			
	T1	T2	T3												
1	X	X	X												
0															
Switching angle		°	90												
Function															
Motor rating AC-23A, 50 - 60 Hz															
400 V	P	kW	180												
Rated uninterrupted current	I _u	A	400												
Note on rated uninterrupted current I _u			Rated uninterrupted current I _u is specified for max. cross-section.												
Connection technique			11 mm connection bore												

Technical data

General

Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204 Switch-disconnector according to IEC/EN 60947-3
Certifications			CE, RoHs, KEMA, EAC, Lloyds
Ambient temperature			
Operation	θ	°C	-25 - +55
Storage	θ	°C	-30 - +80
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U _{imp}	kV	8
Rated insulation voltage	U _i	V	1000
Mounting position			As required

Contacts

Mechanical variables			
Number of poles			3 pole
Auxiliary contacts			
		N/O	0
		N/C	0
Electrical characteristics			
Rated operational voltage	U _e	V AC	690
Rated uninterrupted current	I _u	A	400
Note on rated uninterrupted current I _u			Rated uninterrupted current I _u is specified for max. cross-section.
Short-circuit rating			
fuse			500/250
Rated conditional short-circuit current	I _q	kA	I _n = 500: 50 I _n = 250: 100
Breaking current		kA	I _n = 500: 40 I _n = 250: 33
max. let-through energy		kA ² s	I _n = 500: 1700 I _n = 250: 380
Rated short-time withstand current (1 s current)	I _{cw}	A _{rms}	12000
Note on rated short-time withstand current I _{cw}			Current for a time of 0.3 seconds
Heat dissipation per pole, current-dependent	P _{vid}	W	9

Switching capacity

Rated breaking capacity cos φ to IEC 60947-3		A	
400/415 V		A	2664
500 V		A	2032
690 V		A	1120
Safe isolation to EN 61140			
Current heat loss per contact at I _e		W	9
Lifespan, mechanical	Operations		10000
AC			
AC-21A			
Rated operational current switch			
400 V 415 V	I _e	A	400
500 V	I _e	A	400
690 V	I _e	A	400
AC-22A			
Rated operational current switch			
400 V 415 V	I _e	A	400
500 V	I _e	A	400
690 V	I _e	A	315
AC-23A			
Rated operational current switch			
400 V 415 V	I _e	A	333
500 V	I _e	A	254

690 V	I _e	A	140
Motor rating AC-23A, 50 - 60 Hz	P	kW	
400 V 415 V	P	kW	180
500 V	P	kW	180
690 V	P	kW	132

Terminal capacities

Flat conductor connection with busbars		mm ²	240
Stripping length		mm	21
Terminal screw			M10 x 20
Tightening torque for terminal screw		Nm	28

Technical safety parameters:

Notes			B10 _d values as per EN ISO 13849-1, table C1
-------	--	--	---

Design verification as per IEC/EN 61439

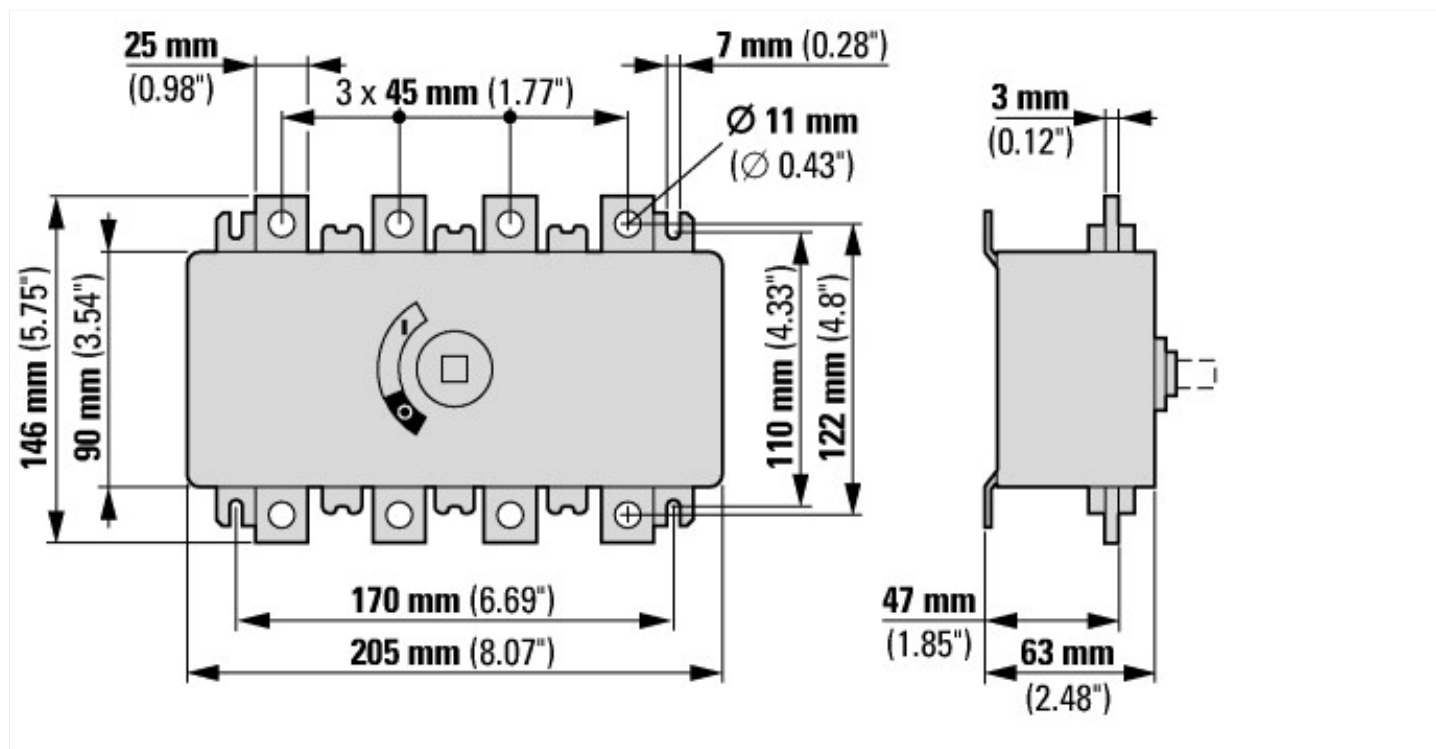
Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	400
Heat dissipation per pole, current-dependent	P _{vid}	W	9
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Switch disconnecter (EC000216)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnecter (ec!ss10.0.1-27-37-14-03 [AKF060013])			
Version as main switch			Yes

Version as maintenance-/service switch		Yes
Version as safety switch		Yes
Version as emergency stop installation		Yes
Version as reversing switch		No
Number of switches		1
Max. rated operation voltage Ue AC	V	690
Rated operating voltage	V	690 - 690
Rated permanent current Iu	A	400
Rated permanent current at AC-23, 400 V	A	333
Rated permanent current at AC-21, 400 V	A	400
Rated operation power at AC-3, 400 V	kW	0
Rated short-time withstand current Icw	kA	12
Rated operation power at AC-23, 400 V	kW	400
Switching power at 400 V	kW	400
Conditioned rated short-circuit current Iq	kA	50
Number of poles		3
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Motor drive optional		No
Motor drive integrated		No
Voltage release optional		No
Device construction		Built-in device fixed built-in technique
Suitable for ground mounting		Yes
Suitable for front mounting 4-hole		No
Suitable for front mounting centre		No
Suitable for distribution board installation		No
Suitable for intermediate mounting		Yes
Colour control element		Red
Type of control element		Toggle
Interlockable		Yes
Type of electrical connection of main circuit		Screw connection
Degree of protection (IP), front side		IP20
Degree of protection (NEMA)		Other

Dimensions



Assets (links)

Declaration of CE Conformity

00003044

Instruction Leaflets

IL008008ZU2018_05