

MCR protection for 2-pin for power supply, 230 V





Surge protection, fine power protection, type 3, to EN 61643-11 (D to VDE 0675 Part 6-11)

- Suitable for DC and AC voltage systems
- With visual function display
- With installation-friendly, screwless connection terminals
- In a space-saving 17.5 mm grid
- Y connection

Application: Universal use on 35 mm hat profile rails in standard distributor housings.

Type	Highest continuous voltage V	U max DC V	U max AC V	Pack. pcs	Weight kg/100 pcs.	Item No.
VF230-AC/DC	255	350	255	1	8,000	5097 65 0

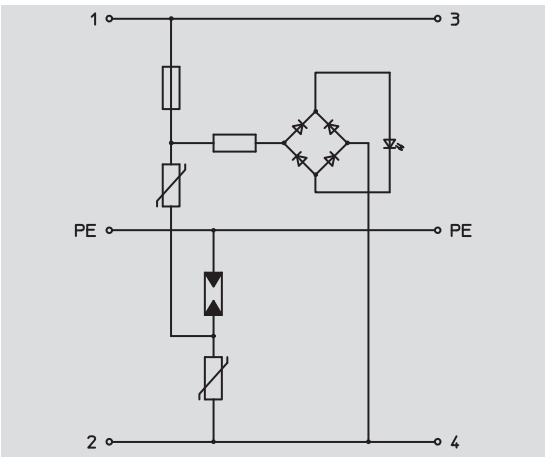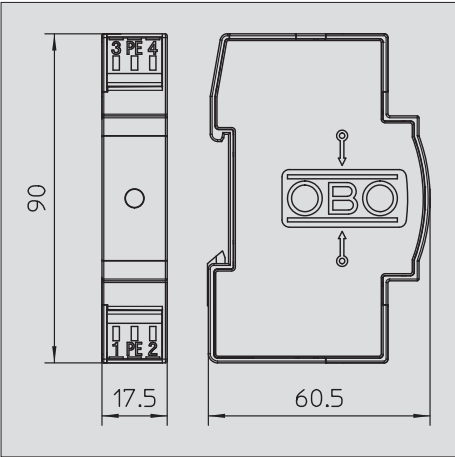

U max AC	U _c AC	V	255,00
U max DC	U _c DC	V	350,00
SPD to EN 61643-11			Type 3
SPD to IEC 61643-11			class III
Lightning protection zone LPZ			2→3
Nominal discharge current (8/20)	I _n	kA	2,5
Rated current	I _L	A	20,00
Voltage protection level line-line		V	<1000
Voltage protection level line-earth		V	<1400
Response time	t _A	ns	<25
Temperature range	θ	°C	-40+80
Protection rating			IP 20
Division unit TE (17.5 mm)			1
Connection cross-section, rigid		mm ²	0,14-2,50
Connection cross-section, multi-wire		mm ²	0,14-2,50
Connection cross-section, flexible		mm ²	0,14-2,50

Item No. 5097 65 0