


DIN cross-connector for flat conductor

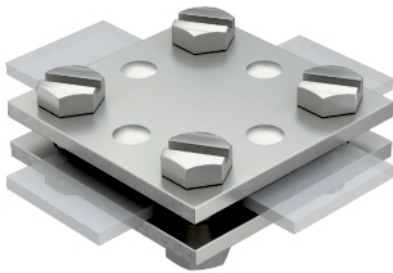

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Fit: Max. FL 30 x FL 30
- Without adapter plate
- Mounted with 4 hexagonal bolts M8 x 25 and 4 hexagonal nuts M8

Type	Fit mm	Dimen- sion A mm	Dimen- sion B mm	Pack. pcs	Weight kg/100 pcs.	Item No.
256 A-DIN 30 VA	max. FL30	60	60	10	27,800	5314720
256 A-DIN 30 V4A	max. FL30	60	60	10	26,400	5314659

V2A Stainless steel, grade 304 **V4A** Stainless steel, grade 316 Ti

Dimensions

