

Technical data sheet

Equipotential bonding rail for outside installation




Connection options:

- 7 single or multi-core conductors to 25 mm² or fine-core conductors to 16 mm²
- 1 round conductor Rd 8-10
- 1 flat strip to FL30 or round conductor Rd 8-10
- Base plate and covering hood from polystyrene
- Colour: black, UV-resistant
- Screws and over-piece from VA
- Capable of carrying lightning current 100 kA (10/350)

Type	Colour	Pack Units	Weight kg/100 pc.	Art.-No.
1809 A	Black	1	23.000	5015111

VA Stainless steel, 1.4301

/pc.

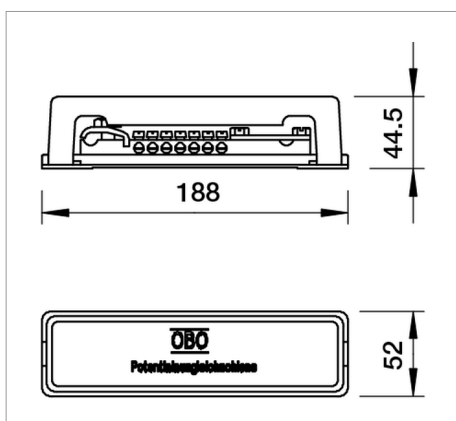

Legend



Lightning current-tested, Class H (100 kA)