

Simply Silent™ DX100 & DX100B

4"/100mm axial extract fans




The Simply Silent™ DX100 intermittent extract fan range is designed for those looking for something conventional, with a modern twist. Just like the entire Simply Silent™ family, these fans control humidity, odours and mould growth effectively in bathrooms, shower rooms, cloakrooms, toilets and kitchens. But the Simply Silent™ DX range features a more conventional grille-style fascia, finished in cool white and available in either round or square. The DX100 range has two speeds, selectable at install, and features a wall-fitting kit.

Wall Kit Includes*



**With kit* models only.


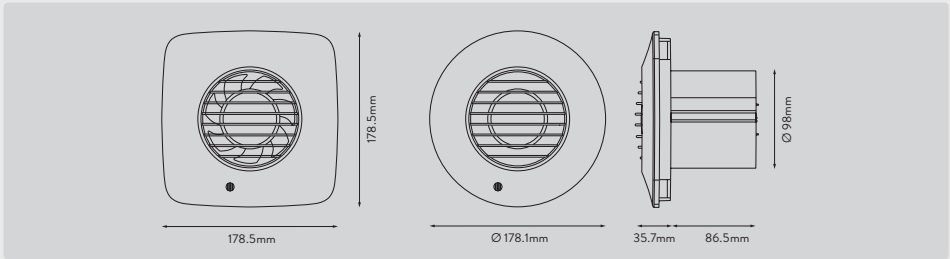


Models		Design	Standard	Timer (adjustable from 30s – 30mins)	Pullcord	Humidistat (50-90% RH)	PIR	Wall Fitting Kit Supplied
With Kit	DX100S	93025AW	■	✓				✓
	DX100TS	93026AW	■	✓				✓
	DX100PS	93027AW	■		✓			✓
	DX100HTS	93028AW	■	✓		✓		✓
	DX100HPTS	93029AW	■	✓	✓	✓		✓
	DX100PIRS	93030AW	■				✓	✓
	DX100R	93005AW	●	✓				✓
	DX100TR	93006AW	●	✓				✓
	DX100PR	93007AW	●		✓			✓
	DX100HTR	93008AW	●	✓		✓		✓
Without Kit	DX100HPTR	93009AW	●	✓	✓	✓		✓
	DX100PIRR	93010AW	●				✓	✓
	DX100BS	93017AW	■	✓				
	DX100BTS	93018AW	■	✓				
	DX100BPS	93002AW	■		✓			
	DX100BHTS	93019AW	■	✓		✓		
	DX100BHPTS	93020AW	■	✓	✓	✓		
	DX100BR	92997AW	●	✓				
	DX100BTR	92998AW	●	✓				
	DX100BPR	93001AW	●		✓			
	DX100BHTR	92999AW	●	✓		✓		
	DX100BHPTR	93000AW	●	✓	✓	✓		

Product Selector	DX100	DX100B
Speeds	2	2
Extract Performance (l/s)	15/21	15/21
Extract Performance (m³/h)	53/74	53/74
Electrical Power Rating (W)	6/6.7	6/6.7
Specific Fan Power (W/l/s)	0.41/0.33	0.41/0.33
Sound Pressure Level (dBA@3m)	22/34	22/34
IP Rating	IPX4	IPX4
Motor Type	AC	AC

Low Speed	
Static Pressure (Pa)	Flow rate in m³/h
0	52.31
1.5	49.51
3.2	46.69
4.8	43.69
7.2	40.46
8.9	37.15
10.4	33.51
11.7	28.92
12.4	24.05
13.4	17.06
17.8	0.00

High Speed	
Static Pressure (Pa)	Flow rate in m³/h
0	73.77
4.6	69.33
8.2	65.14
11.6	60.88
14.6	55.81
16.4	50.08
16.8	44.24
16.7	38.43
16.8	31.79
17.8	22.38
30	0.00

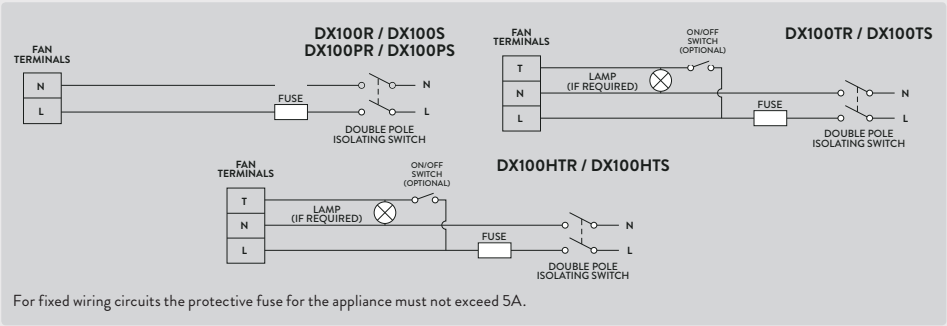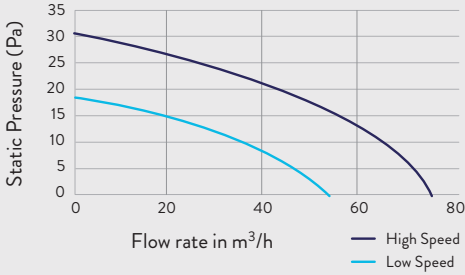

ANCILLARIES
We recommend the Inside Fit External Wall Kit to allow fuss-free fitting from the inside.



Fold the outer grille.



Push through the wall tube.



Open up the outer grille.



Pull back on the string to secure to the outside wall.