

LANmark-OF Tight Buffer Universal Dca

LANmark-OF Tight Buffer Universal 24x Singlemode 9/125 OS2 LSZH Gul

Kontakt

Nexans Cabling Solutions
firmapost@nexans.com

Nexans ref.: N164.TBUN24Y

LANmark-OF TBU 24x Singlemode 9/125 OS2 LSZH Gul

BESKRIVELSE

Description and Application

The LANmark-OF Tight Buffer Universal cable is a fibre cable that can be used indoor and outdoor in a duct.

It complies with the indoor fire requirements and can be installed indoor both vertically and horizontally.

The LANmark-OF Tight Buffer Universal can also be used for outdoor installation in a duct: the water tight glass yarns make the cables fully waterproof and rodent retardant.

The LANmark-OF Tight Buffer Universal cable has 900 um buffered fibres. This second coating till 900 um provides additional protection of the fibres and facilitates the handling when terminating the fibres in a patch panel. The easy strip tight buffer design allows stripping the fibre over 10 cm in one action.


The LANmark-OF Tight Buffer Universal is most suitable for direct termination by either anaerobic or hot melt connectors. The tight buffered fibres can also be terminated with splicing of pigtails.

Tight buffer cables are available in Aqua for OM3 and OM4 and Yellow for singlemode. High exposure to UV radiation and sunlight could lead to fading of the Aqua and Yellow jacket, but the mechanical integrity of the cable jacket will be maintained.

Construction

Legend accompanying the cross section drawing:

1. LSZH outer sheath with UV resistant additive
2. Watertight glass yarns
3. Optical fibres (900 um)
4. Central strength element

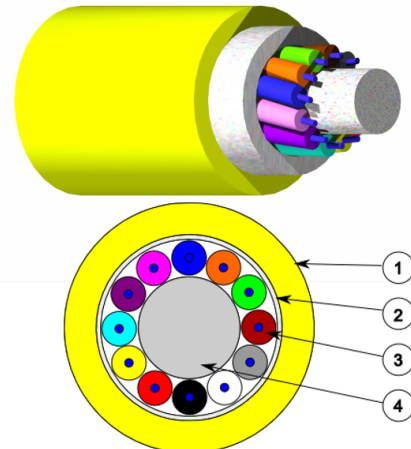

LANmark-OF

YTELSESERKLÆRING

Brannklasse: Dca-s1,d0,a1
i henhold til EN50575:2014
+A1:2016

STANDARER

Internasjonal ISO/IEC 11801



Brannklasse
Dca-s1,d0,a1



Motstandsevne støt
10 impacts of 3
N.m



Flammehemmende
IEC 60332-1



Brannbegrensende
IEC 60332-3



Korrosive gasser
IEC 60754-1, IEC
60754-2



Static bending rad.
80 mm



Min. dynamic
operating bending
rad.
120,0 mm



Ambient installation
T°C range
0 .. 40 °C

Alle tegninger, design, spesifikasjoner, planer og informasjon om vekt, størrelse og dimensjoner i Nexans' tekniske eller kommersielle dokumentasjon er omtrentlig og er ikke bindende fra Nexans' side.

Generert 12.11.20 www.nexans.no Side 1 / 2

Nexans

LANmark-OF Tight Buffer Universal Dca

LANmark-OF Tight Buffer Universal 24x Singlemode 9/125 OS2 LSZH
Gul

Kontakt

Nexans Cabling Solutions
firmapost@nexans.com

Characteristics

- Designed for direct termination and splicing
- Dielectric design
- Indoor cable for horizontal and vertical installations
- Fire performance compliant with IEC 60332-1, IEC 60332-3, NFC 32070 C2, and NFC 32070 C1
- Outdoor cable for installation in a duct
- Fully waterproof
- Rodent retardant
- UV resistant
- Available in SM, OM3 and OM4
- Available in 2-24 fibres

EGENSKAPER

Konstruksjonsegenskaper

Fibertype SM (G657.A1)

Dimensjonsegenskaper

Antall optiske fibre 24

Nominell ytre diameter 7,8 mm

Vekt (ca.) 71 kg/km

Mekaniske egenskaper

Maximum pulling force (IEC 60794-1-2-E1) 1500 N

Maximum operating pulling force 450 N

Motstand mot sammenpressing (IEC 794-1) 100 N/cm

Motstandsevne støt 10 impacts of 3 N.m

Bruksegenskaper

Flammehemmende IEC 60332-1

Brannbegrensende IEC 60332-3

Korrosive gasser IEC 60754-1, IEC 60754-2

Min. statisk bøyeradius 80 mm

Min dynamisk bøyeradius 120,0 mm

Temperaturområde under installasjon 0 .. 40 °C

Driftstemperatur område -40 .. 70 °C

Lagringstemperatur område -40 .. 70 °C

Irriterende avgasser IEC 61034



Brannklasse
Dca-s1,d0,a1



Motstandsevne støt
10 impacts of 3
N.m



Flammehemmende
IEC 60332-1



Brannbegrensende
IEC 60332-3



Korrosive gasser
IEC 60754-1, IEC
60754-2



Static bending rad.
80 mm



Min. dynamic
operating bending
rad.
120,0 mm



Ambient installation
T°C range
0 .. 40 °C

Alle tegninger, design, spesifikasjoner, planer og informasjon om vekt, størrelse og dimensjoner i Nexans' tekniske eller kommersielle dokumentasjon er omtrentlig og er ikke bindende fra Nexans' side.

Generert 12.11.20 www.nexans.no Side 2 / 2

 Nexans