



BOLTED MECHANICAL LUGS (BLMC)

FOR LOW AND MEDIUM VOLTAGE CABLE ACCESSORIES UP TO 42 KV

KEY FEATURES

- Wide application range
- Compact Design
- Can be used with almost every type of conductor and material
- Torque-controlled shearhead bolts guarantee a good electrical contact
- Easy installation with standard socket spanner
- Pre-engineered design for perfect fit in medium voltage cable accessories up to 42 kV
- Tested according to IEC 61238-1 class A

TE Connectivity's (TE) bolted mechanical lugs with concentric palm are designed for use in low and medium voltage terminations.

All products consist of a tin-plated body, shearhead bolts and inserts for small conductor sizes.

Made of special aluminum alloy, these contact bolts are double shearhead bolts with outer hexagon heads.

The bolts are treated with a highly lubricating agent.

Contact bolts are irremovable once their heads have been sheared off.

The Lug body is made of a high-tensile, tin-plated aluminum alloy.

The internal surface of the conductor holes are grooved.


Lugs are suitable for outdoor and indoor applications and are available with 16mm palm hole sizes.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

Bolted Mechanical Lugs with Concentric Palm (BLMC)



The bolted fitting featured herein was developed specifically for use in medium voltage terminations up to 42 kV. They may also be used in the 1 kV range. Before using mechanical lugs in cable accessories, confirm that they are suitable for the given application and if necessary consult the manufacturer.

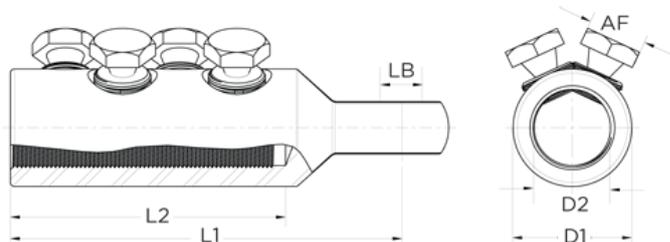

PRODUCT SELECTION INFORMATION

TE Part Number	TE Part Description	Cross Section Range (mm ²)	Nbr of Shearheaded Bolts	Bolt Head Size (mm)	Palm Hole Diameter (mm)	Length (mm)	Length (mm)	Inner Diameter (mm)	Outer Diameter (mm)
				AF	LB	L1	L2	D2	D1
2107040-1	BLMC-500/630-16-1250A	500 - 630	3	27	16.3	155	100	33	50
2107038-1	BLMC-185/400-16-1250A	185 - 400	3	22	16.3	155	100	25,5	50
2107030-1	BLMC-800-16-1250A	800	4	27	16.3	185	130	36	56
2107010-1	BLMC-240/400-16-800A	240 - 400	3	22	16.3	112,5	75	25,5	38
1923652-1	BLMC-25/95-16-800A	25 - 95	1	13	16.3	77,5	30	12,8	29
1923597-1	BLMC-95/240-16-800A	95 - 240	2	19	16.3	107,5	60	19,5	34,5
1923340-1	BLMC-185/300-16-800A	185 - 300	2	22	16.3	112,5	65	24	38

te.com/energy

©2015 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-2465-DDS-8/15-BLMC-Energy-Raychem Bolted Mechanical Lugs (BLMC)

TE, Raychem, TE Connectivity and TE Connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

FOR MORE INFORMATION: TE Technical Support Centers

USA: +1 800 327 6996
 France: +33 380 583 200
 UK: +44 0870 870 7500
 Germany: +49 896 089 903
 Spain: +34 916 630 400
 Benelux: +32 16 351 731
 Canada: +1 (905) 475-6222
 Mexico: +52 (0) 55-1106-0800
 Latin/S. America: +54 (0) 11-4733-2200
 China: +86 (0) 400-820-6015