


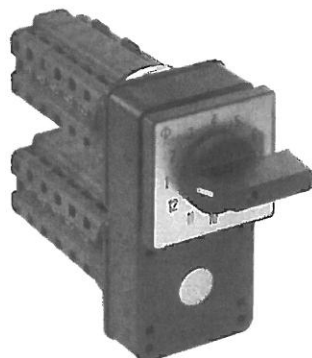

Dimensions p. 30

For 2 switch columns

Two or three switch columns can be operated simultaneously.


Special programs are available to reinforce the device for heavyduty applications.

For 3 switch columns

For 4 switch columns





M300/B

M300/C  
M300/D



## Interlock between Switches and Tandem Drive

V600/B, V600/C, M300/B, M300/C

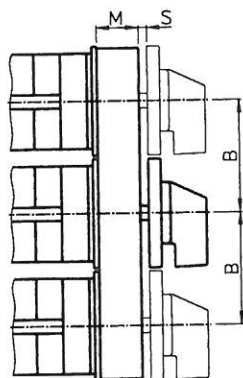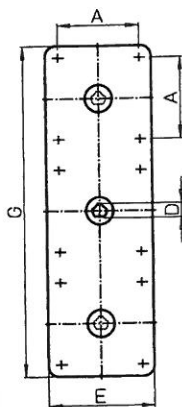

| Size | A          | B           | D           | E           | F            | G            | M          | S                  |
|------|------------|-------------|-------------|-------------|--------------|--------------|------------|--------------------|
| S1   | 48<br>1.89 | 66<br>2.60  | 8,5<br>.34  | 62<br>2.44  | 128<br>5.04  | 194<br>7.64  | 25<br>.98  | 1,4-4,5<br>.06-.18 |
| S2   | 68<br>2.68 | 93<br>3.66  | 11,2<br>.44 | 92<br>3.62  | 183<br>7.20  | 276<br>10.87 | 30<br>1.18 | 1,5-7,0<br>.06-.28 |
| S3   | 88<br>3.46 | 144<br>5.67 | 14<br>.55   | 130<br>5.13 | 274<br>10.79 | 418<br>16.48 | 24<br>.94  | 1,5-8,3<br>.06-.33 |