
	TECHNICAL DATA SHEET		code	8760NH
			version	5
			date	2005-12-20
	8760NH		page	1/2

APPLICATION

Instrumentation and computer cable for data transmission applications.

CONSTRUCTION

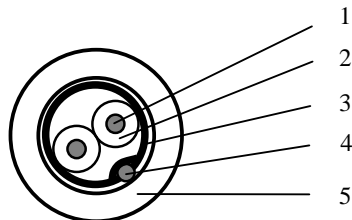

1. Conductor	AWG18 (16xAWG30) tinned Cu
2. Insulation	
Material	Polyethylene
Diameter over insulation	2.08 ± 0.05 mm
Colour of insulation	Black and clear
3. Foil (Beldfoil®)	
Material	Aluminium / Polyester
Thickness	9 / 12 μ m
4. Drainwire	AWG20 (7xAWG28) tinned Cu
5. Sheath	
Material	FRNC (UV stabilised)
Colour	Chrome (like RAL 7037)
Thickness of sheath	0.89 ± 0.05 mm
Diameter over sheath	6.00 ± 0.20 mm


REQUIREMENTS AND TEST METHODS

Electrical:

Nominal resistance conductor @ 20 °C	21.3 Ω /km
Nominal capacitance conductor to conductor	98 pF/m
Nominal capacitance conductor to shield + other cond.	144.4 pF/m
Nominal impedance	60 Ω
Nominal loop inductance	0.591 μ H/m
Nominal velocity of propagation	66 %
Testvoltage conductor-conductor	2500 VDC, 3 seconds
Testvoltage conductor-screen	2500 VDC, 3 seconds
Voltage rating	300 V RMS
Maximum continues current per conductor @ 25 °C	5.3 A

Mechanical and physical:

Flame resistance	IEC 60332-3C
Oil resistance	ASTMD741
Radiation resistance	IEC544 (CERN)
Application specification	BS 7655 section 6.1 table 1, LTS 3
Halogen content according to IEC754-1	zero

	TECHNICAL DATA SHEET		code	8760NH
			version	5
			date	2005-12-20
	8760NH		page	2/2

Corrosivity of fire gasses according to IEC754-2

Conductivity	$\leq 100 \mu\text{S/cm}$
pH value	≥ 3.5
Temperature range installing	-15 to +80 °C
Temperature range operating (moving installation)	-15 to +80 °C
Temperature range operating (fixed installation)	-45 to +80 °C
Temperature range storage	-45 to +80 °C
Minimum bending radius	10 x cable diameter
Maximum pulling tension	281 N

MARKING


Colour code 2911: chrome sheath with text 'BELDEN V 8760NH 1PR 18AWG SHIELDED LSNH IEC 332-3C XXMM'

PACKAGING

On non-returnable reels with a length of 305 m (-0, +10%) or on non-returnable reels with a length of 500 m (-0, +10%) or unreel package with a length of 1000 m (-0, +10%).

Each reel is labelled with the following data:

Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.

	TECHNICAL DATA SHEET		code	8760NH
			version	5
			date	2005-12-20
	8760NH		page	3/2



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.