


<b>TECHNICAL DTATSHEET</b>	code	<b>72001NH</b>
	version	<b>2</b>
	Date	<b>2011-04-26</b>
<b>2 PR CAT5E SF/UTP 24AWG FRNC</b>	page	<b>1/3</b>

**STANDARDS**

- ISO/IEC 11801 2nd edition (September 2002) and ISO/IEC 24702
- EN 50173 – 1 (November 2002).
- TIA/EIA-568-B.2 (May 2001).

**CABLE CONSTRUCTION**

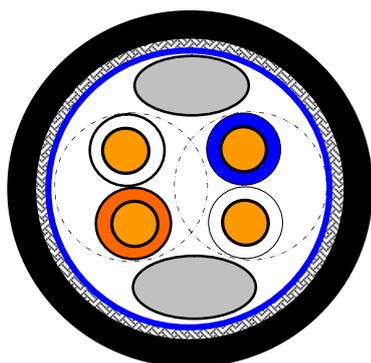

<b>Conductor</b>			
Material		Solid bare copper ETP	
Diameter		AWG 24	
<b>Insulation</b>			
Material		Polypropylene	
Diameter over insulated conductor		1.1 ± 0.05	mm
<b>Pair</b>			
Pair		2 twisted insulated conductors, non bonded	
Number of pairs		2, all twisted together	
Colour code pair 1		White / Blue & Blue	
Colour code pair 2		White / Orange & Orange	
<b>Insulating foil</b>			
Material		Polyester	
<b>Shielding foil</b>			
Material		Laminated Aluminium / Polyester 40/12	
Position aluminium		Outside	
<b>Braid</b>			
Material		Solid tinned copper 0.1	
Coverage		minimum. 80	%
<b>Sheath:</b>			
Material		FRNC	
Diameter		6.0 +/- 0.3 mm	
wallthickness		0.8 mm	
Colour		Black	

<b>TECHNICAL DTATSHEET</b>	code	<b>72001NH</b>
	version	<b>2</b>
	Date	<b>2011-04-26</b>
<b>2 PR CAT5E SF/UTP 24AWG FRNC</b>	page	<b>2/3</b>

## ELECTRICAL CHARACTERISTICS

### Low frequency and D.C.

D.C. resistance conductor	< 93.8	Ω/km
D.C. loop resistance	< 19.0	Ω/100m
Resistance unbalance	< 2	%
D.C. insulation resistance	> 5000	MΩ.km
Dielectric strength cond. – cond. (2 sec.)	2.5	kV D.C.
Mutual capacitance	< 56	nF/km
Capacitance unbalance	< 1600	pF/km

### High frequency

Velocity of propagation		
@ 4 – 100 MHz	≥ 0.6	c
Skew		
@ 1 – 100 MHz	≤ 40	ns/100m
Propagation delay		
@ 1 – 100 MHz	≤ 534 + 36/Vf	ns/100m
Longitudinal attenuation		
@ 4 – 100 MHz	≤ 1.9108*Vf+0.0222*f+0.2/Vf	dB
Transverse conversion loss (TCL)		
@ 1 – 100 MHz	≥ 40-10log(f)	dB
Equal level transverse conversion loss (ELTCL)		
@ 1 – 30 MHz	> 35 – 20 log (f)	dB
Near end cross talk (NEXT)		
@ 1 – 100 MHz	≥ 65.3-15xlog(f)	dB
Equal level far end cross talk (ELFEXT)		
@ 1 – 100 MHz	≥ 64.0-20xlog(f)	dB
Attenuation cross talk ratio (ACR)		
@ 4 – 100 MHz	≥ 65.3-15xlog(f)-(1.9108*Vf+0.0222*f+0.2/Vf)	dB
Input impedance open/short (Zo/s)		
@ 4-100 MHz	100 ± 15	Ω
Mean characteristic impedance (Zcm)		
@ 100 MHz	100 ± 5	Ω
Return Loss (RL)		
@ 4 ≤ f ≤ 10 MHz	≥ 20 + 5 log (f)	dB
@ 10 ≤ f ≤ 20 MHz	≥ 25	dB
@ 20 ≤ f ≤ 100 MHz	≥ 25 – 7 log (f/20)	dB
Coupling attenuation		
@ 30 – 100 MHz	> 60	dB

<b>TECHNICAL DTATSHEET</b>	code	<b>72001NH</b>
	version	<b>2</b>
	Date	<b>2011-04-26</b>
<b>2 PR CAT5E SF/UTP 24AWG FRNC</b>	page	<b>3/3</b>

**MECHANICAL CHARACTERISTICS**

Elongation at break conductor	≥ 10 %
Elongation at break insulation	≥ 100 %
Elongation at break sheath	≥ 100 %
Tensile strength sheath	≥9 Mpa

**ENVIRONMENTAL AND OVERALL CHARACTERISTICS**

Maximum operating voltage	450 V D.C. and 300 V A.C.
Maximum continuous current per conductor (@25°C)	1.4 A rms
Maximum pulling tension	80 N
Minimum setting/ bending radius	30 / 60 mm
Temperature range during installation	-5 / +50 °C
Temperature range during operation	-40 / +80 °C
Halogenfree	IEC 60754-1
Oil resistance	IEC 60811-2-1
Flame propagation	IEC 60332-1



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.