



TERMINAL BLOCK HOUSING

RK 4/25 SL-25x4²

RK 4/25 SL-25x4²

Terminal block housing

CUSTOMIZABLE

254 x 180 x 90 mm
Article number: 61002501

Terminal block housing, Polystyrene, grey, similar to RAL 7035, incl. 8 attachment bushes M20, seal range 8 - 13.5 mm, IP54, 2 attachment bushes M25, seal range 9 - 18.5 mm, 1 adapter M32, seal range 13 - 23 mm


with 25 screwless terminals 4 mm², (type Weidmüller ZDU 4)

IP66
IP54

IK07



4²

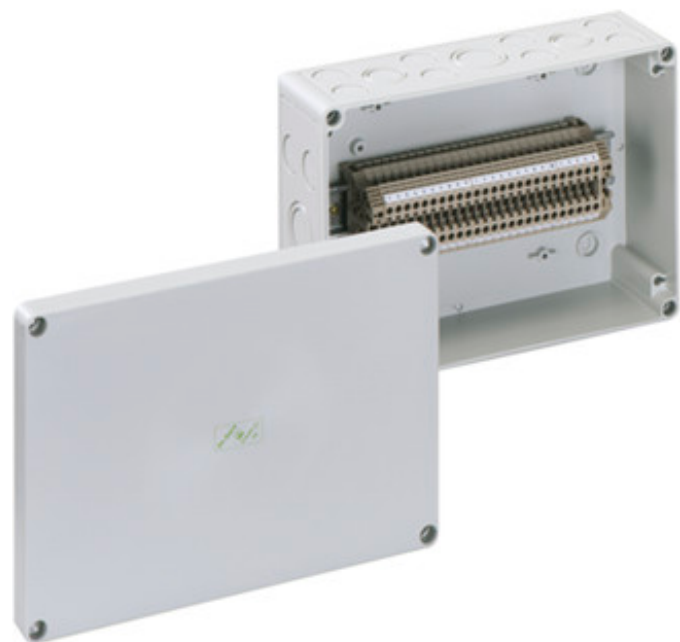

Technical data

Measures

Width:	254 mm
Length:	180 mm
Height:	90 mm

Material

Base:	Polystyrene, grey, similar to RAL 7035
Cover:	Polystyrene, grey, similar to RAL 7035
Sealing:	Polyurethane
Cover screw:	Polyamide 6, fiber-glass reinforced

Other attributes

Ingress protection:	IP66/IP54 - acc. EN60529 / DIN VDE 0470-1
---------------------	---

Accessory

TK ABL

ASS-gro

VSG

HBA

KS M20

KS M25

KS M32

KS M40



TERMINAL BLOCK HOUSING

RK 4/25 SL-25x4²

Impact resistance:	IK07 acc. DIN EN 5012 / VDE 0470 Part 100
--------------------	---

Protection class:	II - isolate protection acc. VDE 0106
-------------------	---

Heavy metals-free:	Yes
--------------------	-----

PVC-free:	Yes
-----------	-----

Silicone-free:	Yes
----------------	-----

Combustion behaviour to UL:	HB acc. UL94
-----------------------------	--------------

Combustion behaviour to VDE:	650°C acc. VDE 0471/ EN 60695
------------------------------	----------------------------------

Fitted for outdoor application:	No
---------------------------------	----

Knockouts:	Yes
------------	-----

sealable:	Yes
-----------	-----

Weatherproof:	No
---------------	----

Equioment:	Screwless terminals
------------	------------------------

Number terminals:	25 Quantity
-------------------	-------------

Rated cross section:	4 mm ²
----------------------	-------------------

Environmental attributes

Ambient temperature (min.):	-25 °C
-----------------------------	--------

Ambient temperature (max.):	40 °C
-----------------------------	-------

Ambient temperature (24 h):	35 °C
-----------------------------	-------

Max. rel. humidity at 25° C (short Therm):	95%
---	-----

Max. rel. humidity at 40° C:	50%
------------------------------	-----