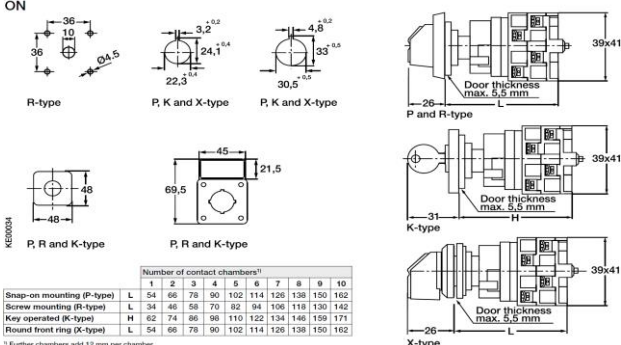


FDV Dokumentasjon

ON 	ONP12EPB																																																																											
	Varetekst Reversérvender ONP12EPB	El.Nr. 1478753	ABB Art.Nr. 1SCA022849R0260	EAN/GTIN 4034656510312																																																																								
Forvaltning																																																																												
Drift	Renhold	Ikke krav til renhold																																																																										
	Energiforbruk																																																																											
	Henvisninger	Katalog ID : 1SCC302003C0201																																																																										
Vedlikehold	Rutiner	Ingen krav til periodisk vedlikehold																																																																										
	Levetid																																																																											
	Annet																																																																											
Generelt	Dimensjoner: HxBxD = 185x215x305 millimetre In=25A termisk ON  <table border="1" data-bbox="459 1937 810 2004"> <thead> <tr> <th></th> <th></th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> </tr> </thead> <tbody> <tr> <td>Number of contact chambers¹⁾</td> <td></td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> <td>10</td> </tr> <tr> <td>Snap-on mounting (P-type)</td> <td>L</td> <td>54</td> <td>66</td> <td>78</td> <td>90</td> <td>102</td> <td>114</td> <td>126</td> <td>138</td> <td>150</td> <td>162</td> </tr> <tr> <td>Screw mounting (R-type)</td> <td>L</td> <td>34</td> <td>46</td> <td>58</td> <td>70</td> <td>82</td> <td>94</td> <td>106</td> <td>118</td> <td>130</td> <td>142</td> </tr> <tr> <td>Key operated (K-type)</td> <td>H</td> <td>62</td> <td>74</td> <td>86</td> <td>98</td> <td>110</td> <td>122</td> <td>134</td> <td>146</td> <td>158</td> <td>171</td> </tr> <tr> <td>Rounded front ring (X-type)</td> <td>L</td> <td>54</td> <td>66</td> <td>78</td> <td>90</td> <td>102</td> <td>114</td> <td>126</td> <td>138</td> <td>150</td> <td>162</td> </tr> </tbody> </table> ¹⁾ Further chambers add 12 mm per chamber						1	2	3	4	5	6	7	8	9	10	Number of contact chambers ¹⁾		1	2	3	4	5	6	7	8	9	10	Snap-on mounting (P-type)	L	54	66	78	90	102	114	126	138	150	162	Screw mounting (R-type)	L	34	46	58	70	82	94	106	118	130	142	Key operated (K-type)	H	62	74	86	98	110	122	134	146	158	171	Rounded front ring (X-type)	L	54	66	78	90	102	114	126	138	150	162
		1	2	3	4	5	6	7	8	9	10																																																																	
Number of contact chambers ¹⁾		1	2	3	4	5	6	7	8	9	10																																																																	
Snap-on mounting (P-type)	L	54	66	78	90	102	114	126	138	150	162																																																																	
Screw mounting (R-type)	L	34	46	58	70	82	94	106	118	130	142																																																																	
Key operated (K-type)	H	62	74	86	98	110	122	134	146	158	171																																																																	
Rounded front ring (X-type)	L	54	66	78	90	102	114	126	138	150	162																																																																	
Produsent	Navn	Adresse	Tlf	E-Post																																																																								
	ABB AS Low Voltage Products	Postboks 94 1375 Billingstad	24 16 54 00	automasjonsprodukter@no.abb.com																																																																								