



CABLE JUNCTION BOX

WKE 304 RK



WKE 304 RK


Cable junction box

CUSTOMIZABLE

160 x 160 x 110 mm
Article number: 86230401

Cable junction and connection box with IP66 certified acc. EN 60670, with intrinsic fire resistance E30 acc. DIN 4102 Part 12, with isolation integrity FE180 acc. IEC 60331-11 as well as functional life F400 acc. EN 12101, housing and terminal blocks made from halogen-free special duroplastic

Junction box with fused E30 branch, 5-pole in transition area, termination capability for each pole 2 x 2.5 - 10 mm², 3-pole in fused E30 branch, termination capability per pole 1 x 1.5 - 10 mm², fuse (20 x 5 mm) max. 6.3A, Accessories supplied: Wall plug set Ø 6 mm, 2 cable glands M40, seal range 17 - 27 mm, 1 cable gland M25, seal range 6 - 15 mm

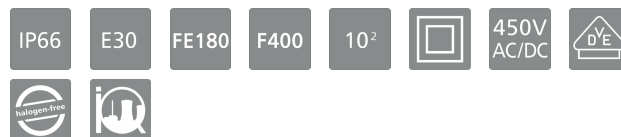

Technical data

Measures

Width:	160 mm
Length:	160 mm
Height:	110 mm

Material

Base:	Duroplastic
Cover:	Duroplastic
Sealing:	Polyurethane
Cover screw:	stainless steel V2A

Other attributes

Color:	orange
--------	--------

Accessory

WKE 200 ABL

KVS

WKE 200 ABL

KVS



CABLE JUNCTION BOX

WKE 304 RK

Entries:	3
Rated cross section:	10 mm ²
Tackable:	No
Rated insulation voltage AC:	450 V
Explosion safety:	none
Fire protection:	E 30
sealable:	No
Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Ingress protection:	IP66 - acc. EN 60529 / DIN VDE 0470-1
Weatherproof:	Yes
Equiptment:	Terminal

Environmental attributes

Ambient temperature (min.):	-25 °C
Ambient temperature (max.):	40 °C
Ambient temperature (24 h):	35 °C
Max. rel. humidity at 25° C (short Therm):	95%
Max. rel. humidity at 40° C:	50%