



SMALL SCALE DISTRIBUTOR

WKE AK 14



WKE AK 14


Small scale distributor

CUSTOMIZABLE

400 x 540 x 230 mm
Article number: 86541401

WKE AK small-scale distributors, VDE certificated compliant with EN 61 439 Part 2, VDE tested and certified under specific operating conditions to be compliant with EN 61 439 2 paragraph 7.2, tested compliant with EN 13501 Part 2 by MPA Dresden, F90 for internal flame impingement according to DIN 4102 based on I90, F90 for external flame impingement according to DIN 4102 based on E90, configurable with type-tested components

stop left, 1 row, 14 modules, $U_i=400V$, screwless PE/N terminal rails each with 3 screwable clamping points, 2.5 - 16 mm², 14 screwless clamping points, 1.5 - 4 mm², elastic entries on top, with cable covering, masking and labelling strips, additional double-membrane seals and other accessories

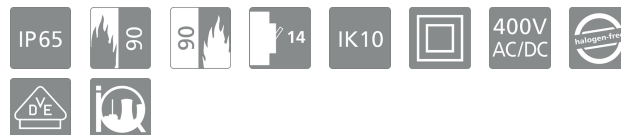

Technical data

Measures

Width:	400 mm
Length:	540 mm
Height:	230 mm

Material

Base:	fire protection boards
Cover:	fire protection boards

Other attributes



SMALL SCALE DISTRIBUTOR

WKE AK 14

Fire protection:	E30 E60 E90 acc. MLAR
------------------	--------------------------

Fire load insulation:	F30 F60 F90 nach MLAR
-----------------------	--------------------------

VDE mark of conformity:	EN 61 439-1
-------------------------	-------------

Protection class:	II - isolate protection acc. VDE 0106
-------------------	---

Ingress protection:	IP65 - acc. EN 60529 / DIN VDE 0470-1
---------------------	---

Rated voltage:	400 V
----------------	-------

Impact resistance:	IK10
--------------------	------

Combustion behaviour to UL:	V-0 acc. UL 94
-----------------------------	----------------

Mounting:	Internal fastening
-----------	--------------------

Environmental attributes

Ambient temperature (24 h):	35 °C
-----------------------------	-------

Ambient temperature (min.):	-25 °C
-----------------------------	--------

Ambient temperature (max.):	40 °C
-----------------------------	-------

Max. rel. humidity at 25° C (short Therm):	95%
---	-----

Max. rel. humidity at 40° C:	50%
------------------------------	-----