



SMALL SCALE DISTRIBUTOR

WKE AK 70



WKE AK 70


Small scale distributor

CUSTOMIZABLE

400 x 1140 x 230 mm
Article number: 86547001

WKE AK small-scale distributors, VDE certificated compliant with EN 61 439 Part 2, VDE tested and certified under specific operating conditions to be compliant with EN 61 439 2 paragraph 7.2, tested compliant with EN 13501 Part 2 by MPA Dresden, F90 for internal flame impingement according to DIN 4102 based on I90, F90 for external flame impingement according to DIN 4102 based on E90, configurable with type-tested components

70 modules, stop left, 5 row, $U_i=400V$, 150 mm rail spacing, screwless PE/N terminal rails each with 6 screwable clamping points, 2.5 - 16 mm², 21 screwless clamping points 1.5 mm² - 4 mm², elastic entries on top, additional double-membrane seals and other accessories

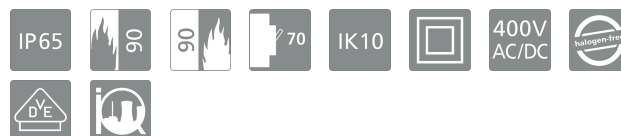

Technical data

Measures

Width:	400 mm
Length:	1140 mm
Height:	230 mm

Material

Base:	fire protection boards
Cover:	fire protection boards

Other attributes

Fire protection:	E30 E60 E90 acc.
------------------	------------------



SMALL SCALE DISTRIBUTOR

WKE AK 70

MLAR

Fire load insulation:	F30 F60 F90 nach MLAR
-----------------------	--------------------------

VDE mark of conformity:	EN 61 439-1
-------------------------	-------------

Protection class:	I - insulated acc. VDE 0106
-------------------	--------------------------------

Ingress protection:	IP65 - acc. EN 60529 / DIN VDE 0470-1
---------------------	---

Rated voltage:	400 V
----------------	-------

Impact resistance:	IK10
--------------------	------

Combustion behaviour to UL:	V-0 acc. UL 94
-----------------------------	----------------

Mounting:	Internal fastening
-----------	--------------------

Environmental attributes

Ambient temperature (24 h):	35 °C
-----------------------------	-------

Ambient temperature (min.):	-25 °C
-----------------------------	--------

Ambient temperature (max.):	40 °C
-----------------------------	-------

Max. rel. humidity at 25° C (short Therm):	95%
---	-----

Max. rel. humidity at 40° C:	50%
------------------------------	-----