

theRonda S360 Slave UP GR

Article number: 2080531

Description




- Passive infrared presence detector for ceiling mounting
- Round detection area 360°, up to Ø 9 m (64 m²)
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, service remote control theSenda P, management remote control SendoPro (optional)

Technical data


Operating voltage	110 – 230 V AC
Frequency	50 – 60 Hz
Installation height	2 – 4 m
Minimum height	> 1,7 m
Installation type	Ceiling installation
Colour	Grey
Switching output	Light
Power consumption	~0,1 W
Light measurement	Mixed light measurement
Type of connection	Screw terminals
Max. cable cross section	max. 2 x 2,5 mm ²
Size of concealed housing	Ø 55 mm (NIS, PMI)
Detection range	50 m ² (Ø 8 m 360°)
Ambient temperature	-15 °C ... +50 °C
Type of protection	IP 54 (when fitted)

Connection example

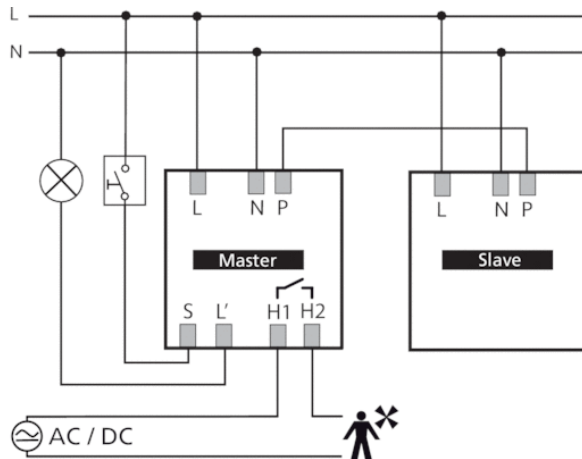


Detection range

Mounting height (A)	Sitting (S)	Walking (T)
2 m	5 m ² 2,5 m	38 m ² 7 m
2,5 m	7 m ² 3 m	38 m ² 7 m
3 m	13 m ² 4 m	50 m ² 8 m
3,5 m	–	50 m ² 8 m
4 m	–	64 m ² 9 m

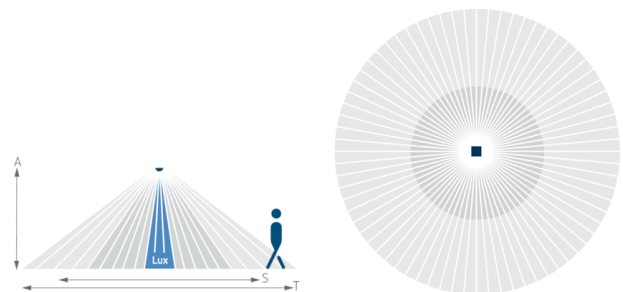

Scale drawings

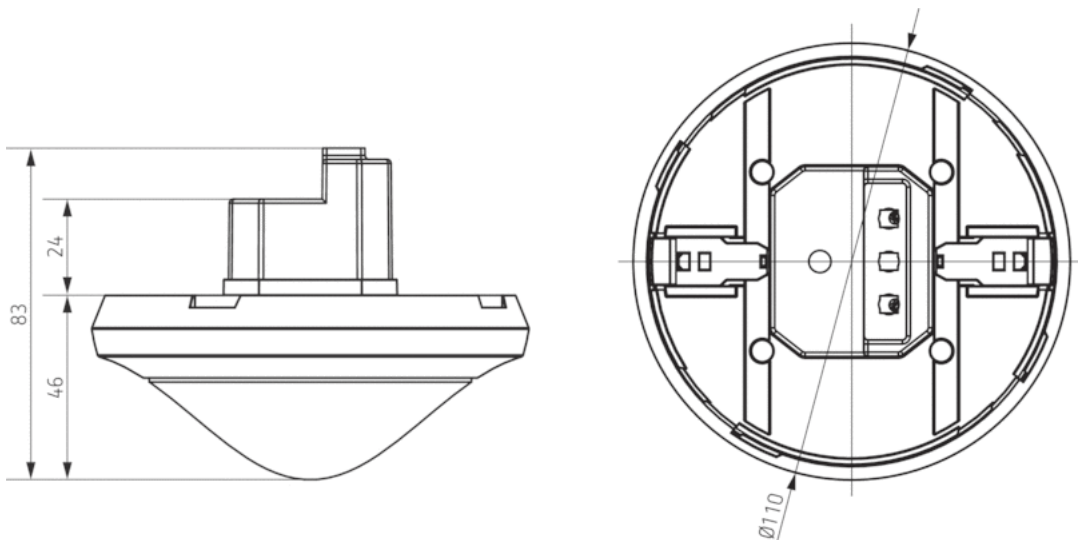

Accessories

Surface frame 110A GR

- Article number: 9070913
Details ▶ www.theben.de



SendoPro 868-A

- Article number: 9070675
Details ▶ www.theben.de



theSenda P

- Article number: 9070910
Details ▶ www.theben.de



Article number: 2080531

theSenda S

- Article number: 9070911
[Details](#) ▶ www.theben.de



Product selection

Installation type	Channel	Operating voltage	Colour	Type	Article number
Ceiling installation	Light	110 – 230 V AC	White	theRonda S360 Slave UP WH	2080530
Ceiling installation	Light	110 – 230 V AC	Grey	theRonda S360 Slave UP GR	2080531