

LUNA 121 top2 RC EL 24V

Article number: 1214200

Description




- Digital twilight switch/lighting control
- (Available february 2011)
- Holiday and public holiday program with yearly function for fived and public holidays dependent on Easter
- Different summer/winter time rules can be selected or freely defined
- Switching brightness digitally adjustable
- Adjustable On and Off switching delay
 - to avoid switching errors caused by lightning, car headlights etc. Preset 1 minute
- Switching brightness and switching delay can be set separately for switching On and Off
- Onscreen display of channel and switching status as well as current lux value
- DuoFix spring terminals
 - for 2 conductors per connection terminal
- Zero-cross switching for relay-saving switching and high lamp loads
- Up to 4 sensors can be attached
- Up to 10 devices can be connected to a digital sensor
- Interface for OBELISK top2 memory card (PC programming)
 - 2. insertable switching program
 - Copying programs
 - Storing programs
- External light sensor included in delivery
- Extended brightness range
- Permanent switching ON/OFF
- Test function
 - (Permanent ON) to check the installation independently of set brightness value
- Switching preselection
- Display lighting
 - (can be switched off)
- PIN coding
- External control input
 - for switches or buttons
- Operating hour counter
 - with reminder function

Technical data

Operating voltage	12 – 24 V UC
Frequency	50 – 60 Hz
Number of channels	1
Number of memory locations	84
External inputs	1
Power consumption	3 VA
Program	Weekly program
Additional program	Extra/Holiday program
Time basis	Quartz/DCF77
Setting range brightness	1 – 99000 lx
Preset brightness value	15 lx
Switch-on delay	0 – 59 min
Switch-off delay	0 – 59 min
Type of contact	Changeover contact
Switching output	Potential free, not for SELV
Width	2 modules
Installation type	DIN rail
Type of connection	DuoFix spring terminals
Keyboards	4 touch buttons
Shortest switching times	1 min
Power reserve	10 years, at 20 °C

Switching capacity	16 A (at 250 V AC, $\cos \varphi = 1$), 10 A (at 250 V AC, $\cos \varphi = 0.6$), 10 AX (Fluorescent lamp load)
Switching capacity min.	ca. 10 mA
Incandescent lamp load	2600 W
Halogen lamp load	2600 W
Fluorescent lamp load (conventional) not corrected	2300 VA
Fluorescent lamp load (conventional) series-corrected	2300 VA
Fluorescent lamp load (conventional) lead-lag circuit	2300 VA
Fluorescent lamp load (conventional) parallel-corrected	800 VA, 80 μ F
Energy saving lamps	22 x 7 W, 18 x 11 W, 16 x 15 W, 16 x 20 W, 14 x 23 W
Fluorescent lamp load (EVG)	650 VA
Test approval	VDE
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Ambient temperature	-30 °C ... +55 °C
Type of protection	IP 20
Protection class	II
Max. cable length to sensor	100 m

Connection example

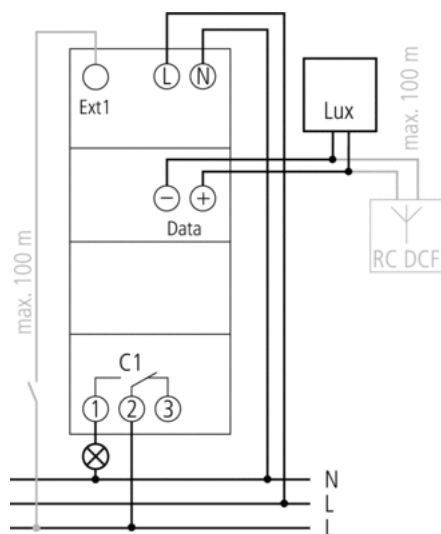

Accessories

Antenna top2 RC-GPS

- Article number: 9070610
[Details ▶ www.theben.de](http://www.theben.de)



Antenna top2 RC-DCF

- Article number: 9070410
[Details ▶ www.theben.de](http://www.theben.de)



Digital surface-mounted light sensor

- Article number: 9070415
[Details ▶ www.theben.de](http://www.theben.de)



Digital flush-mounted light sensor

- Article number: 9070456
[Details ▶ www.theben.de](http://www.theben.de)



Wall mounting kit 35 mm

- Article number: 9070064
[Details ▶ www.theben.de](http://www.theben.de)



Power unit top2 GPS

- Article number: 9070892
[Details ▶ www.theben.de](http://www.theben.de)

PC set OBELISK top2

- Article number: 9070409
[Details ▶ www.theben.de](http://www.theben.de)



Memory card OBELISK top2

- Article number: 9070404
[Details ▶ www.theben.de](http://www.theben.de)



Front panel kit

- Article number: 9070001
[Details ▶ www.theben.de](http://www.theben.de)

