

KV-Empty boxes



KG 9003



- Degree of protection: IP 55 (ESM), IP 65 (see cable entry systems LES)



- for installation equipment on DIN rails or mounting plates
- max. installation depth with built-in mounting plate 95 mm, with built-in DIN rail 89 mm
- with transparent hinged lid
- fastener for tool operation
- sealable
- cable entry via metric knockouts
- included cable entry: 2 ESM 25, sealing range \varnothing 9-17 mm and 1 ESM 32, sealing range \varnothing 9-23 mm
- colour: grey, RAL 7035

protection class	II
Material:	PS polystyrene thermoplastic
width	217 mm
height:	253 mm
depth	115 mm
Weight	0,71 kg

Drawings

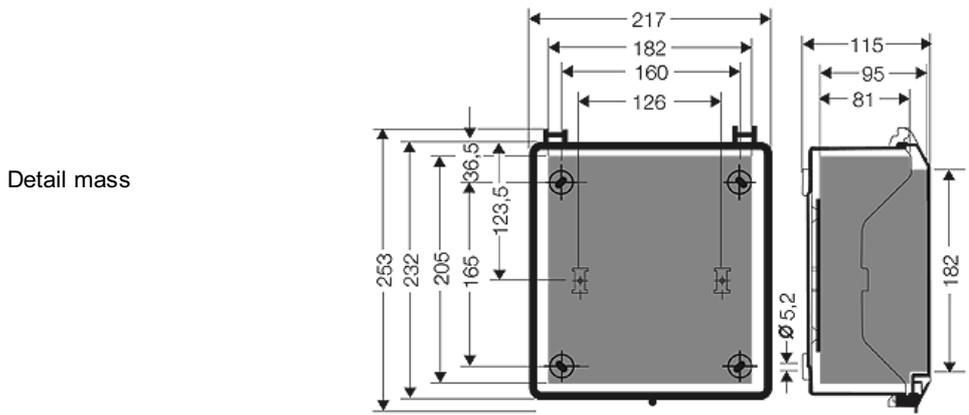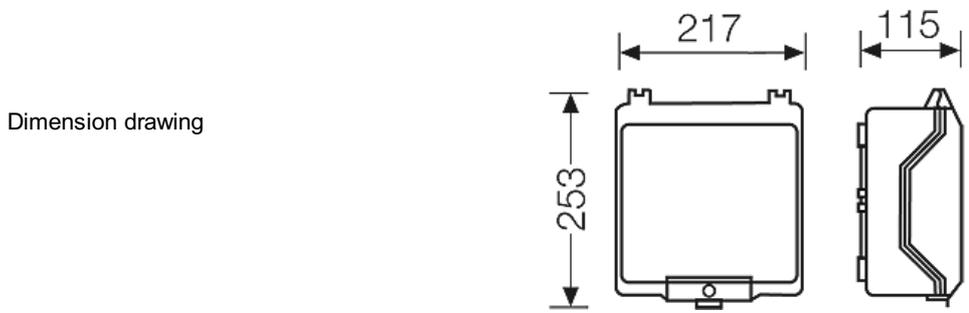

KV-Empty boxes



KG 9003

- Degree of protection: IP 55 (ESM), IP 65 (see cable entry systems LES)





Box walls



6 x M 20
2 x M 25/32
1 x M 32/40



2 x AVS 16/
EVS 16

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences However, pay attention to the climatic effects on the installed equipment , for example, high or low ambient temperatures or formation of condensed water see technical information
Ambient temperature	Maximum value + 60 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60 695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60 695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK08 (5 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60 754-2
Note:	For material properties see technical data.