


## IBSBR Insulated Braided Conductor, High Temperature - IBSBR240-330 SCS (558541MTO)

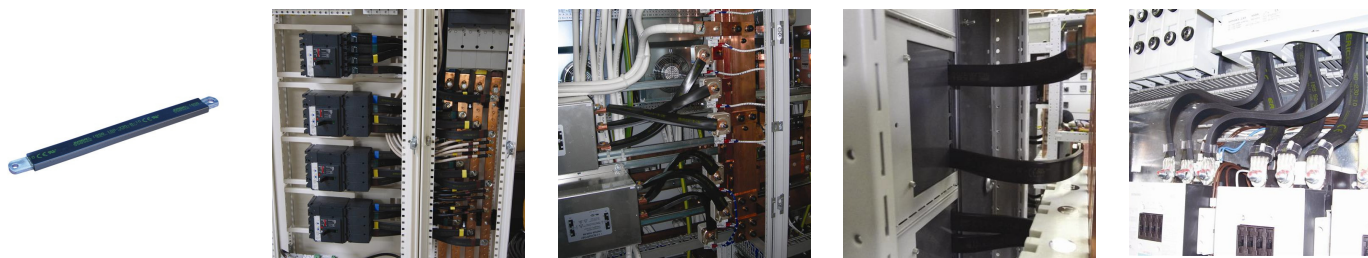


IBSB/IBSBR is the ideal ready-to-install flexible wire replacement solution that is specifically designed for connections to all molded case circuit breakers, including the most compact breakers on the market. It connects to the front access terminals of the breakers without any additional accessories, such as angular connectors, spreaders, ring terminal connectors or extenders. IBSB/ IBSBR is available in cross section of 25 to 240 mm<sup>2</sup> (49.34 to 273.65 kcmil), lengths from 230 to 1,130 mm, and 80 to 350 A tinned and 400 to 630 A bare (red) copper.

Manufactured in an ISO 9001 certified proprietary automated facility, IBSB/IBSBR is formed by weaving high-quality electrolytic copper wire to form a durable low voltage connector with maximum flexibility that allows for more compact power connections to circuit breakers. The IBSB/IBSBR allows users to reduce the total size and weight of the installation, improving both design flexibility and assembly aesthetics.

The IBSB/IBSBR features integral pre-punched palms that are ready to connect out of the box. There are no lugs to purchase or install, making connections simpler and faster and eliminating faulty connections due to vibration or fatigue. The insulation is a high-resistance self-extinguishing PVC.

IBSB/IBSBR is compatible with all major brand molded case circuit breakers. Contact your ERIFLEX representative to determine the correct size for your application.

- Suitable for all main molded case circuit breakers
- Resistant to vibration, improving reliability and performance
- Improves assembly flexibility and aesthetics
- Quick and easy installation
- No additional cutting, stripping, crimping and punching needed
- Integral palm without lugs or terminals reduces material and assembly weight
- Small wire diameter provides maximum flexibility
- RoHS compliant

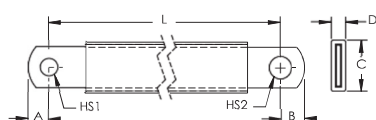

|                                    |                             |
|------------------------------------|-----------------------------|
| Part Number                        | IBSBR240-330 SCS            |
| Article Number                     | 558541MTO                   |
| Typical Application Current Rating | 630 A                       |
| Finish                             | Bare                        |
| Material                           | Copper<br>Polyvinylchloride |
| Dielectric Strength                | 10 kV/mm                    |
| Flammability Rating                | UL® 94V-0                   |
| Max Working Voltage, IEC/UL 758    | 1,000 VAC                   |

|  |                             |                                                                                                                                                                                         |
|--|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Part Number                 | IBSBR240-330 SCS                                                                                                                                                                        |
|  |                             | 1,500 VDC                                                                                                                                                                               |
|  | Max Working Voltage, UL 67  | 600 VAC/DC                                                                                                                                                                              |
|  | Working Temperature         | 290 °C Max                                                                                                                                                                              |
|  | Operating Temperature       | -60 to 250 °C                                                                                                                                                                           |
|  | Wire Diameter               | 0.15 mm                                                                                                                                                                                 |
|  | Complies With               | IEC® 60439.1<br>IEC® 61439.1<br>IEC® 61439.1 Class II                                                                                                                                   |
|  | Cross Section               | 240 mm²                                                                                                                                                                                 |
|  | Conductor Width             | 32 mm                                                                                                                                                                                   |
|  | Conductor Thickness         | 9.2 mm                                                                                                                                                                                  |
|  | Length (L)                  | 330 mm                                                                                                                                                                                  |
|  | A                           | 12 mm                                                                                                                                                                                   |
|  | B                           | 14 mm                                                                                                                                                                                   |
|  | C                           | 39 mm                                                                                                                                                                                   |
|  | D                           | 18.5 mm                                                                                                                                                                                 |
|  | Hole Size 1 (HS1)           | 10.5 mm                                                                                                                                                                                 |
|  | Hole Size 2 (HS2)           | 12.5 mm                                                                                                                                                                                 |
|  | Unit Weight                 | 0.890 kg                                                                                                                                                                                |
|  | Certifications              | ABS 13-HS1070074-PDA<br>Bureau Veritas 41939 BV<br>CE<br>CSA 90005<br>cURus<br>EAC0234251(RussianFederation)<br>IEC 61439-1 ClassIIIBS-IBSB-IBSBR<br>IEC 61439-1 IBS-IBSB-IBSBR<br>RoHS |
|  | Standard Packaging Quantity | 2 pc                                                                                                                                                                                    |
|  | UPC                         |                                                                                                                                                                                         |
|  | EAN-13                      | 7090041500648                                                                                                                                                                           |

| Maximum Ampacity Ratings     |              |              |              |              |              |              |              |                              |                              |
|------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|------------------------------|------------------------------|
| Cross Section<br>(mm²/kcmil) | ΔT 30° C (A) | ΔT 40° C (A) | ΔT 45° C (A) | ΔT 50° C (A) | ΔT 55° C (A) | ΔT 60° C (A) | ΔT 70° C (A) | 2 Bar Current<br>Coefficient | 3 Bar Current<br>Coefficient |
| 25/49.34                     | 116          | 134          | 142          | 150          | 157          | 164          | 177          | 1.6                          | 2                            |
| 50/98.68                     | 213          | 246          | 260          | 274          | 288          | 301          | 325          | 1.6                          | 2                            |
| 70/138.15                    | 226          | 261          | 277          | 291          | 306          | 319          | 345          | 1.6                          | 2                            |
| 100/197.35                   | 298          | 344          | 365          | 385          | 404          | 422          | 456          | 1.6                          | 2                            |
| 120/236.82                   | 363          | 419          | 444          | 468          | 491          | 513          | 554          | 1.6                          | 2                            |
| 185/365.1                    | 416          | 480          | 509          | 537          | 563          | 588          | 635          | 1.6                          | 2                            |
| 240/473.65                   | 556          | 642          | 681          | 718          | 753          | 786          | 849          | 1.6                          | 2                            |

| Circuit Breaker Compatibility            |                 |                  |         |          |           |           |           |
|------------------------------------------|-----------------|------------------|---------|----------|-----------|-----------|-----------|
| Circuit Breaker<br>Current Rating        | 125/160 A       | 250 A            | 300 A   | 350 A    | 400 A     | 500 A     | 630 A     |
| Part Number                              | IBSB25x         | IBSB50x          | IBSB70x | IBSB100x | IBSBR120x | IBSBR185x | IBSBR240x |
| Schneider<br>Electric®<br>Compact® (IEC) | NSA<br>NG 125   | NSX 250          | NSX 400 | NSX 400  | NSX 400   | NSX 630   | NSX 630   |
| Square D®<br>PowerPact® (UL)             | H-Frame         | J-Frame          | L-Frame | L-Frame  | L-Frame   | -         | -         |
| ABB®<br>Tmax® (IEC)                      | T1<br>T2<br>XT1 | T3<br>XT3<br>XT4 | T4      | T4       | T5        | T5        | T5        |

| Circuit Breaker Compatibility  |                                 |                     |               |               |               |           |           |
|--------------------------------|---------------------------------|---------------------|---------------|---------------|---------------|-----------|-----------|
| Circuit Breaker Current Rating | 125/160 A                       | 250 A               | 300 A         | 350 A         | 400 A         | 500 A     | 630 A     |
| Part Number                    | IBSB25x                         | IBSB50x             | IBSB70x       | IBSB100x      | IBSBR120x     | IBSBR185x | IBSBR240x |
|                                | XT2                             |                     |               |               |               |           |           |
| ABB® Tmax® (UL)                | T1<br>T2                        | T4                  | T5            | T5            | T5            | -         | -         |
| GE® Record Plus® (IEC/UL)      | FD 160                          | FE 250              | FG 400        | FG 400        | FG 400        | FG 630    | FG 630    |
| Siemens® Sentron® (IEC/UL)     | VL160X<br>3VL1<br>VL160<br>3VL2 | VL250<br>3VL3       | VL400<br>3VL4 | VL400<br>3VL4 | VL400<br>3VL4 | -         | -         |
| Moeller® xEnergy® (IEC)        | NZM1                            | NZM2                | NZM3          | NZM3          | NZM3          | NZM3      | NZM3      |
| Cutler Hammer® Series G (UL)   | EG Frame                        | JG Frame            | LG Frame      | LG Frame      | LG Frame      | LG Frame  | LG Frame  |
| Legrand® (IEC)                 | DPX 160<br>DPX3 160             | DPX 250<br>DPX3 250 | DPX 630       | DPX 630       | DPX 630       | DPX 630   | DPX 630   |
| Hager® (IEC)                   | h3 160                          | h3 250              | h3 630        | h3 630        | -             | -         | -         |

ΔT = Temperature of conductors – Internal temperature of panel.  
 This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

ABB is a registered trademark of ABB Asea Brown Boveri Ltd. ABS is a registered certification mark of American Bureau of Shipping. CSA, CSA-US and C-CSA-US are registered trademarks of Canadian Standards Association. GE and Record Plus are registered trademark of General Electric Company. Hager is a registered trademark of the Hager Group. IEC is a registered trademark of the International Electrotechnical Commission. Legrand is a registered trademark of Legrand North America, Inc. Moeller, xEnergy, and Cutler Hammer are registered trademarks of Eaton Corporation. Schneider Electric and Compact are registered trademarks of Schneider Electric SA. Siemens and Sentron are registered trademarks of Siemens Aktiengesellschaft. Square D and PowerPact are registered trademarks of SNA Holdings Inc. Tmax is a registered trademark of ABB SACE Spa. UL, UR, cUL, cULus and cURus are registered certification marks of ULLC.

**WARNING**  
 Pentair products shall be installed and used only as indicated in Pentair’s product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair’s instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2016 Pentair All rights reserved  
 Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.  
 All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.