




Neutral Bar for TD Distribution Blocks – NB-125A (563841)



- Attaches to four pole distribution blocks for increased wire capacity
- Direct electrical connection
- Strong mechanical assembly
- Transparent protection cover
- Halogen free
- RoHS compliant

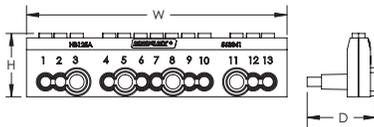

Part Number	NB-125A
Article Number	563841
Max Current Rating, IEC	125 A
Short Term Withstand Current (I _{cw}) 1s	4.5 kA
Peak Short Circuit Current (I _{pk})	30 kA
Line Side Number of Connections	3
Line Side Compact Stranded Wire Size	10 - 25 mm ²
Line Side Stranded Wire Size - Ferrule	6 - 16 mm ²
Load Side Number of Connections	9
Load Side Compact Stranded Wire Size	2,5 - 6 mm ²
Load Side Stranded Wire Size - Ferrule	1,5 - 6 mm ²
Depth (D)	37.4 mm
Height (H)	34.3 mm
Width (W)	142 mm
Unit Weight	0.17 kg
For Use With	TD-100-125AL (563830) TD-100-125ALL (563840)
Flammability Rating	UL® 94V-0
Complies With	IEC® 60947-7-1
Certifications	EAC 0234267 (Russian Federation) RoHS

Part Number	NB-125A
Standard Packaging Quantity	10 pc
UPC	78285662698
EAN-13	8711893045109

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2016 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.