


CODE: **AWO257 v1.6**
NAME: **17/TRZ50/SATEL/SP**

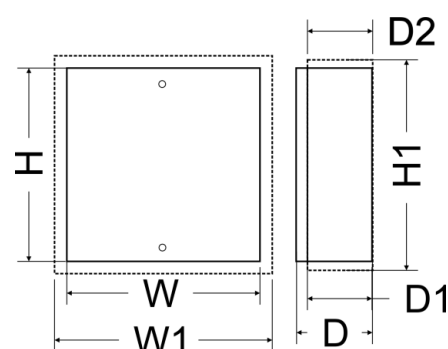

DESTINATION

SATEL

CONTROL PANELS: (INTEGRA: 24, 32) + 4x CA-64 (E, SM, O-OC),

(CA-64, INTEGRA: 64,128 + 3x CA-64 (E, SM, O-OC), CA-5, CA-6, CA-10+ (CA-10E, MST-1),

MODULES: CA-64 (PP, EPS, ADR, O-R, O- ROC, OPS-OC, OPS-R, OPS-ROC, VMG-16, SR, DR, PTSA) +4x CA-64 (E, O-OC),

ACC-KP-PS

TECHNICAL DATA

Dimensions:	W=330, H=395, D=105, W1=335, H1=400, D1=90mm, D2=90 [mm, +/-2]
Weight netto/brutto:	5,4 / 5,6 [kg]
Battery space:	7Ah/12V, 17Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRZ 50VA/16V/18V/20V
Power supply:	230V/AC (-15%/+10%), 50+60Hz, 295mA (max.)
Power supply output:	U1=16V/AC U2=18V/AC U3=20V/AC (-5%, +15%), I1=3,0A I2=2,8A I3=2,5A (max.)
Operating environment:	class II , -10°C+ 40°C
Tamper protection:	2 x microswitch: opening or removal from wall, 0,5A@50V/DC max. NC/NO contacts
Closing:	screwed x 2, (screwed for front casing)
Notes:	distance from wall (mounting surface) - 15mm, easy door removal, RAL 9003
Certification, declaration:	CE, RoHS, CLC/TS 50131-3:2003