

## wall mounting appliance inlet - without closure cap




| Product description       |                                  |
|---------------------------|----------------------------------|
| BALS-Prd.-Nr              | 2483                             |
| EAN                       | 4024941024839                    |
| product category          | GT wall mounting appliance inlet |
| current                   | 16A                              |
| number of poles           | 5p                               |
| number of poles           | 3p+N+PE                          |
| position of earth contact | 6 h                              |
| voltage                   | 200/346 up to 240/415V           |
| frequency                 | 50 and 60Hz                      |

| Product description    |                                                                                |
|------------------------|--------------------------------------------------------------------------------|
| protection degree      | IP67                                                                           |
| colour code            | red RAL 3000                                                                   |
| Colour of appliance    | Collar red, Bayonet ring grey, Housing bottom grey, Housing top grey           |
| connection design      | screw terminal                                                                 |
| maximum conductor size | 2,5 qmm                                                                        |
| cable entry            | top entry M20                                                                  |
| Height                 | 129mm                                                                          |
| Width                  | 86mm                                                                           |
| Depth                  | 111mm                                                                          |
| dimension of enclosure | 84x84 mm                                                                       |
| material of enclosure  | Polyamide                                                                      |
| contact                | The contact carrier is made of polyamide, the contacts are brass nickel plated |

| Additional technical information |                                                              |
|----------------------------------|--------------------------------------------------------------|
|                                  | The cable entry is one at top open and one rear sided closed |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.261 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941024839    |

| Logistics data |               |
|----------------|---------------|
| Length         | 111 mm        |
| Width          | 86 mm         |
| Height         | 129 mm        |
| Weight         | 0.262 kg      |
| Volume         | 1,231.434 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941967693 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 2.816 kg      |
| Volume         | 13,588.4 ccm  |

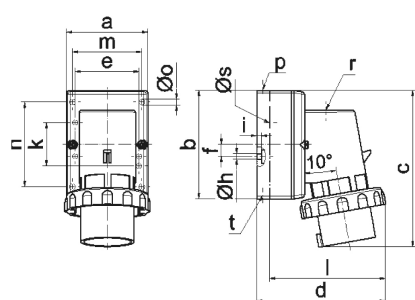

5 MB 128

| Ampere  | 16      | 16      | 16    | 32    | 32    | 32    |
|---------|---------|---------|-------|-------|-------|-------|
| Polzahl | 3       | 4       | 5     | 3     | 4     | 5     |
| a       | 64,0    | 75,0    | 84,0  | 90,0  | 90,0  | 90,0  |
| b       | 87,0    | 100,0   | 84,0  | 75,0  | 75,0  | 75,0  |
| c       | 137,0   | 151,0   | 136,0 | 138,0 | 138,0 | 139,0 |
| d       | 112,0   | 119,0   | -     | 122,0 | 122,0 | 123,0 |
| e       | 51,0    | 59,0    | -     | -     | -     | -     |
| f       | -       | 11,0    | -     | -     | -     | -     |
| h Ø     | 4,1     | 5,1     | -     | -     | -     | -     |
| i       | 4,5     | 4,5     | -     | -     | -     | -     |
| k       | 40,0    | -       | -     | -     | -     | -     |
| l       | -       | -       | 111,0 | -     | -     | -     |
| m       | -       | -       | 64,0  | 78,0  | 78,0  | 78,0  |
| n       | -       | -       | 64,0  | 45,0  | 45,0  | 45,0  |
| o Ø     | -       | -       | 5,5   | 5,5   | 5,5   | 5,5   |
| p       | M20     | M20     | -     | -     | -     | -     |
| r       | -       | -       | M20   | M25   | M25   | M25   |
| s Ø     | -       | -       | 23,0  | 29,0  | 29,0  | 29,0  |
| t       | für M20 | für M20 | -     | -     | -     | -     |