

panel mounting socket outlet, angled - flange 87x71,
fixing centers 70x52




Product description	
BALS-Prd.-Nr	12741
EAN	4024941127417
product category (PG)	Panel mounting socket outlet Quick-Connect, angled
current (A)	16A
number of poles (P99)	5p
number of poles (P)	3p+N+PE
position of earth contact (H)	6 h
voltage (V)	200/346 up to 240/415V

Product description	
frequency (HZ)	50 and 60Hz
protection degree (SA)	IP44
colour code 1 (KF1)	red RAL 3000
Colour of appliance	Hinged lid red, Enclosure grey
connection design (AT)	screwless spring terminals as cage clamp with Kontext-contact
maximum conductor size (LQ)	4,0 qmm
cable entry (KE)	null
Height	90mm
Width	71mm
Depth	96mm
Flange size vertical	87mm
Flange size horizontal	71mm
Drill hole distance vertical	70mm
Drill hole distance horizontal	52mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of polyamide, The contacts are brass

Additional technical information	
	The inclination is 20°

Logistics data	
Weight/pcs	0.139 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941127417
Length	96 mm
Width	71 mm
Height	90 mm
Weight	0.14 kg
Volume	613.44 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941829281
Length	245 mm
Width	177 mm
Height	185 mm
Weight	1.523 kg
Volume	7,140 ccm

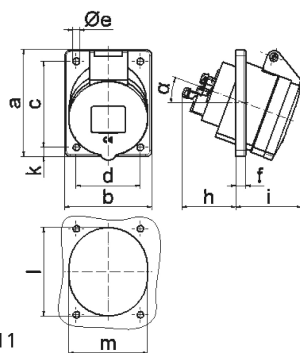

4 MB 111

Ampere	16	16	16			
Polzahl	3	4	5			
a	68,0	87,0	87,0			
b	62,0	71,0	71,0			
c	47,0	70,0	70,0			
d	47,0	52,0	52,0			
e ø	5,5	5,5	5,5			
f	8,0	5,5	5,5			
h	46,0	46,0	46,0			
i	50,0	54,0	54,0			
k	-	9,5	9,5			
l	56,0	65,0	72,0			
m	51,0	58,0	64,0			
α	20°	20°	20°			
Leiter mm² min	1,5	1,5	1,5			
Leiter mm² max	4	4	4			