

panel mounting socket outlet, straight - flange 75x75,  
fixing centers 60x60




| Product description           |                                                      |
|-------------------------------|------------------------------------------------------|
| BALS-Prd.-Nr                  | 13734                                                |
| EAN                           | 4024941137348                                        |
| product category (PG)         | Panel mounting socket outlet Quick-Connect, straight |
| current (A)                   | 16A                                                  |
| number of poles (P99)         | 3p                                                   |
| number of poles (P)           | 2P+PE                                                |
| position of earth contact (H) | 6 h                                                  |
| voltage (V)                   | 200 up to 250V                                       |

| Product description            |                                                                  |
|--------------------------------|------------------------------------------------------------------|
| frequency (HZ)                 | 50 and 60Hz                                                      |
| protection degree (SA)         | IP67                                                             |
| colour code 1 (KF1)            | blue RAL 5015                                                    |
| Colour of appliance            | Hinged lid blue, Bayonet ring grey, Enclosure grey               |
| connection design (AT)         | screwless spring terminals as cage clamp with Kontext-contact    |
| maximum conductor size (LQ)    | 4,0 qmm                                                          |
| cable entry (KE)               | null                                                             |
| Height                         | 81mm                                                             |
| Width                          | 75mm                                                             |
| Depth                          | 90mm                                                             |
| Flange size vertical           | 75mm                                                             |
| Flange size horizontal         | 75mm                                                             |
| Drill hole distance vertical   | 60mm                                                             |
| Drill hole distance horizontal | 60mm                                                             |
| material of enclosure (GM)     | Polyamide                                                        |
| contact                        | The contact carrier is made of polyamide, The contacts are brass |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.129 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941137348 |
| Length         | 90 mm         |
| Width          | 75 mm         |
| Height         | 81 mm         |
| Weight         | 0.13 kg       |
| Volume         | 546.75 ccm    |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941963527 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 1.415 kg      |
| Volume         | 5,737.5 ccm   |

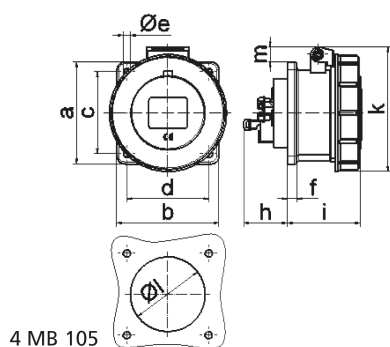

| Ampere Polzahl | 16<br>3 | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|----------------|---------|---------|---------|---------|---------|---------|
| a              | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    |
| b              | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    |
| c              | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    |
| d              | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    |
| e ø            | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     |
| f              | 7,0     | 7,0     | 7,0     | 8,0     | 8,0     | 8,0     |
| h              | 35,5    | 35,5    | 35,5    | 46,0    | 46,0    | 46,0    |
| i              | 57,0    | 58,0    | 57,0    | 65,0    | 65,0    | 65,0    |
| k              | 76,0    | 83,0    | 93,0    | 100,0   | 100,0   | 106,0   |
| l ø            | 45,0    | 45,0    | 55,0    | 60,0    | 60,0    | 60,0    |
| m              | 3,5     | 7,0     | 11,5    | 12,0    | 12,0    | 17,0    |
| Leiter mm² min | 1,5     | 1,5     | 1,5     | 2,5     | 2,5     | 2,5     |
| Leiter mm² max | 4       | 4       | 4       | 10      | 10      | 10      |