

Motion detector

IS 3360 MX Highbay

DALI-2 IPD - surface, sq.
EAN 4007841 057374

STEINEL[®]
PROFESSIONAL



infrared sensor
360°



2 - 1000 lux



IP54



CE



ideal 4 - 14 m



energy saving

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems.

Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	95 x 95 x 65 mm
Mains power supply	12 – 22,5 V
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	high-bay warehouse, sports hall, indoors
Installation site	ceiling
Type of installation	Surface wiring
Switching zones	1416 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	4,00 – 14,00 m
Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	45 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes

Reach, radial	Ø 14 m (154 m ²)
Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Switching output 1, floating	No
Control output, Dali	Addressable/slave
Basic light level function	Yes
With bus coupling	Yes
With remote control	No
Interconnection	Yes
IP rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	DALI-2 IPD - surface, sq.
PUI1, EAN	4007841057374

Motion detector

IS 3360 MX Highbay


DALI-2 IPD - surface, sq.
EAN 4007841 057374



Accessories


EAN 4007841 009151 Remote control Smart Remote

Detection Zone

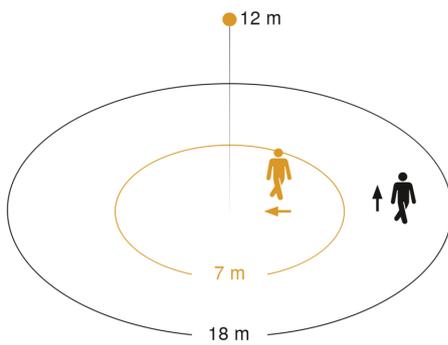

Mögliche Montagehöhe: 4,00 m – 14,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

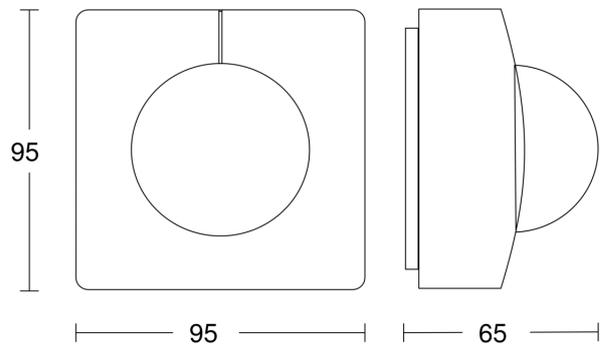

Circuit diagram

