


Product data sheet

Item No. 57.910.5055.0

Fuse terminal WK 10/SI U 5 X 20 /V0

Fuse terminal block with screw connection for mounting on TS 35 and TS 32, nominal cross section 10 mm², width 10 mm, color gray

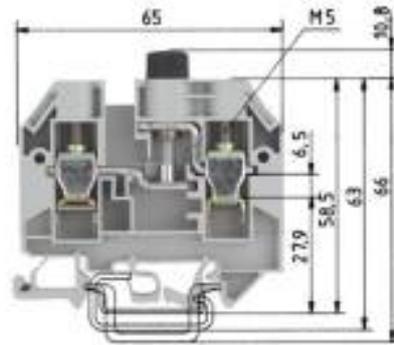

Item No.	57.910.5055.0
EAN	4015573517318
Order Unit	50 Piece(s)

Certificates / Approvals



Technical data

Note

Remark to rated voltage	Note fuse insert
Remark to rated current	Note fuse insert

General

Nominal cross section	10 mm ²
Colour	Grey
Number of levels	1
Width/grid dimension	12 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Mounting method	DIN rail (top hat rail)/G-rail
Terminal blocks for electrical installations	No
Fuse insert	G-fuse 5x20 mm

Technical data

Rated current	10 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	65 mm

Connection Data

Connection type 1	Screw connection
Connection type 2	Screw connection
Minimum cross section solid	1 mm ²
Maximum cross section solid	10 mm ²
Minimum cross section fine stranded	1 mm ²
Maximum cross section fine stranded	10 mm ²
Minimum cross section stranded	16 mm ²
Maximum cross section stranded	16 mm ²
Wire strip length	13 mm
Torque conductor mounting	2 Nm

Technical Data UL/CSA

Cross section UL	22-6 AWG
Voltage UL	600 V
Current factory wiring	15 A
Current field wiring	15 A
Cross section CSA	16-6 AWG
Voltage CSA	600 V
Current CSA	15 A

Technical drawing

Dimensions: 65, 66, 63, 58,5, 50, 67,5, 12, 5,7, 7

Labels:

- Hutschiene EN 60715-35x7,5
mounting rail EN 60715-35x7,5
- G-Schiene EN 60715-G 32
g-rail EN 60715-G 32
- Hutschiene EN 60715-35x15
mounting rail EN 60715-35x15

Teile-Nr./part-nr. | Typ/type | Version/version

57.910.5055.0	WK 10/Si U 5x20	ohne Leuchtanzeige without red LEDs as indicator
57.910.5155.0	WK 10/Si U 5x25	
57.910.5255.0	WK 10/Si U 5x30	mit Leuchtanzeige with red LEDs as indicator
57.910.5455.0	WK 10/Si U 5x20M.NGL	
57.910.5855.0	WK 10/Si U 5x20M.GLB	

Weitere Daten siehe Katalog
further data see catalog

57.910.5055.0 1K 4 C046227 (Ausg. 15.03.2003) (2x30x6) 1.000