



# Product data sheet

Item No. R:6587218879

Cross connector, insulated for DIN rail terminal blocks type WK ..., 12 -pole  $\,$ 



Item No.	R:6587218879
EAN	
Order Unit	Piece(s)

## Certificates / Approvals

# Technical data

## General


Туре	Cross connector
Modular spacing	5 mm
Number of bridged clamps	12
Mounting method	Screwable
Insulated	Yes


## Accessories


Туре	Cross connector
Mounting method	Screwable
Insulated	Yes
Number of bridged clamps	12
Modular spacing	5 mm









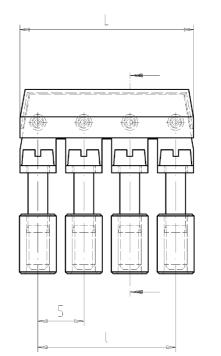

Teile-Nr. part nr.	Pol- zahl poles	L	l	Typ type	11 12 1
Z7.280.2227.0 Z7.280.2327.0	2	8,9	5	IVB WK 2,5-2	]
Z7.280.2427.0 Z7.280.2527.0	4 5	18,9	15	IVB WK 2,5-4	1
Z7.280.2627.0 Z7.280.2727.0	6 7	28,9	25	IVB WK 2,5-6	
Z7.280.2827.0	8	38,9	35	IVB WK 2,5-8	
Z7.280.2927.0 Z7.280.3027.0	10	43,9	40	IVB WK 2,5-9 IVB WK 2,5-10	<u>ا</u> ج
Z7.280.3127.0 Z7.280.3227.0	12	53,9	50 55	IVB WK 2,5-11 IVB WK 2,5-12	1000

Weitere Daten siehe Katalog further data see catalog

Änderung/Revision

Talerierung nach DIN 7167/Tolerance system acc. to DIN 7167. (This DIN-standard desbribes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerancesl. ja/yes ⊠ Stoffverbots- und Deklarationsliste nach UU-T0M-05/03 ist einzuhalten. Conformity with Wieland document UU-T0M-05/03 [list of prohibited / declarable hazardous substances] to be declared!

o 04.10.2007/

IVB WK

Verbindungen

VERBINDUNGSSTEG

juper bar

